

summary for network N32T

timeperiod chosen: from 2026-07-17-00:00:00 until 2026-07-17-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 95.0 percent

stations available: 15 of 15


station information:

station EH01:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 801.016
station EH02:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 85.385
station GOM1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 48.789
station GOME:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 114.977
station IZAN:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 2417.44
station LP01:	antenna: TRM57971.00	NONE	receiver: TRIMBLE ALLOY	height: 675.249
station LP03:	antenna: TRM59900.00	NONE	receiver: TRIMBLE NETR9	height: 919.563
station LPAL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 2199.31
station LRES:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 51.241
station TN01:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 51.859
station TN02:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 54.509
station TN03:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE ALLOY	height: 58.588
station TN06:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1053.548
station TN09:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 1582.15
station TE11:	antenna: LEIAR10	NONE	receiver: LEICA GR25	height: 2092.021


Processing rate in network N32T

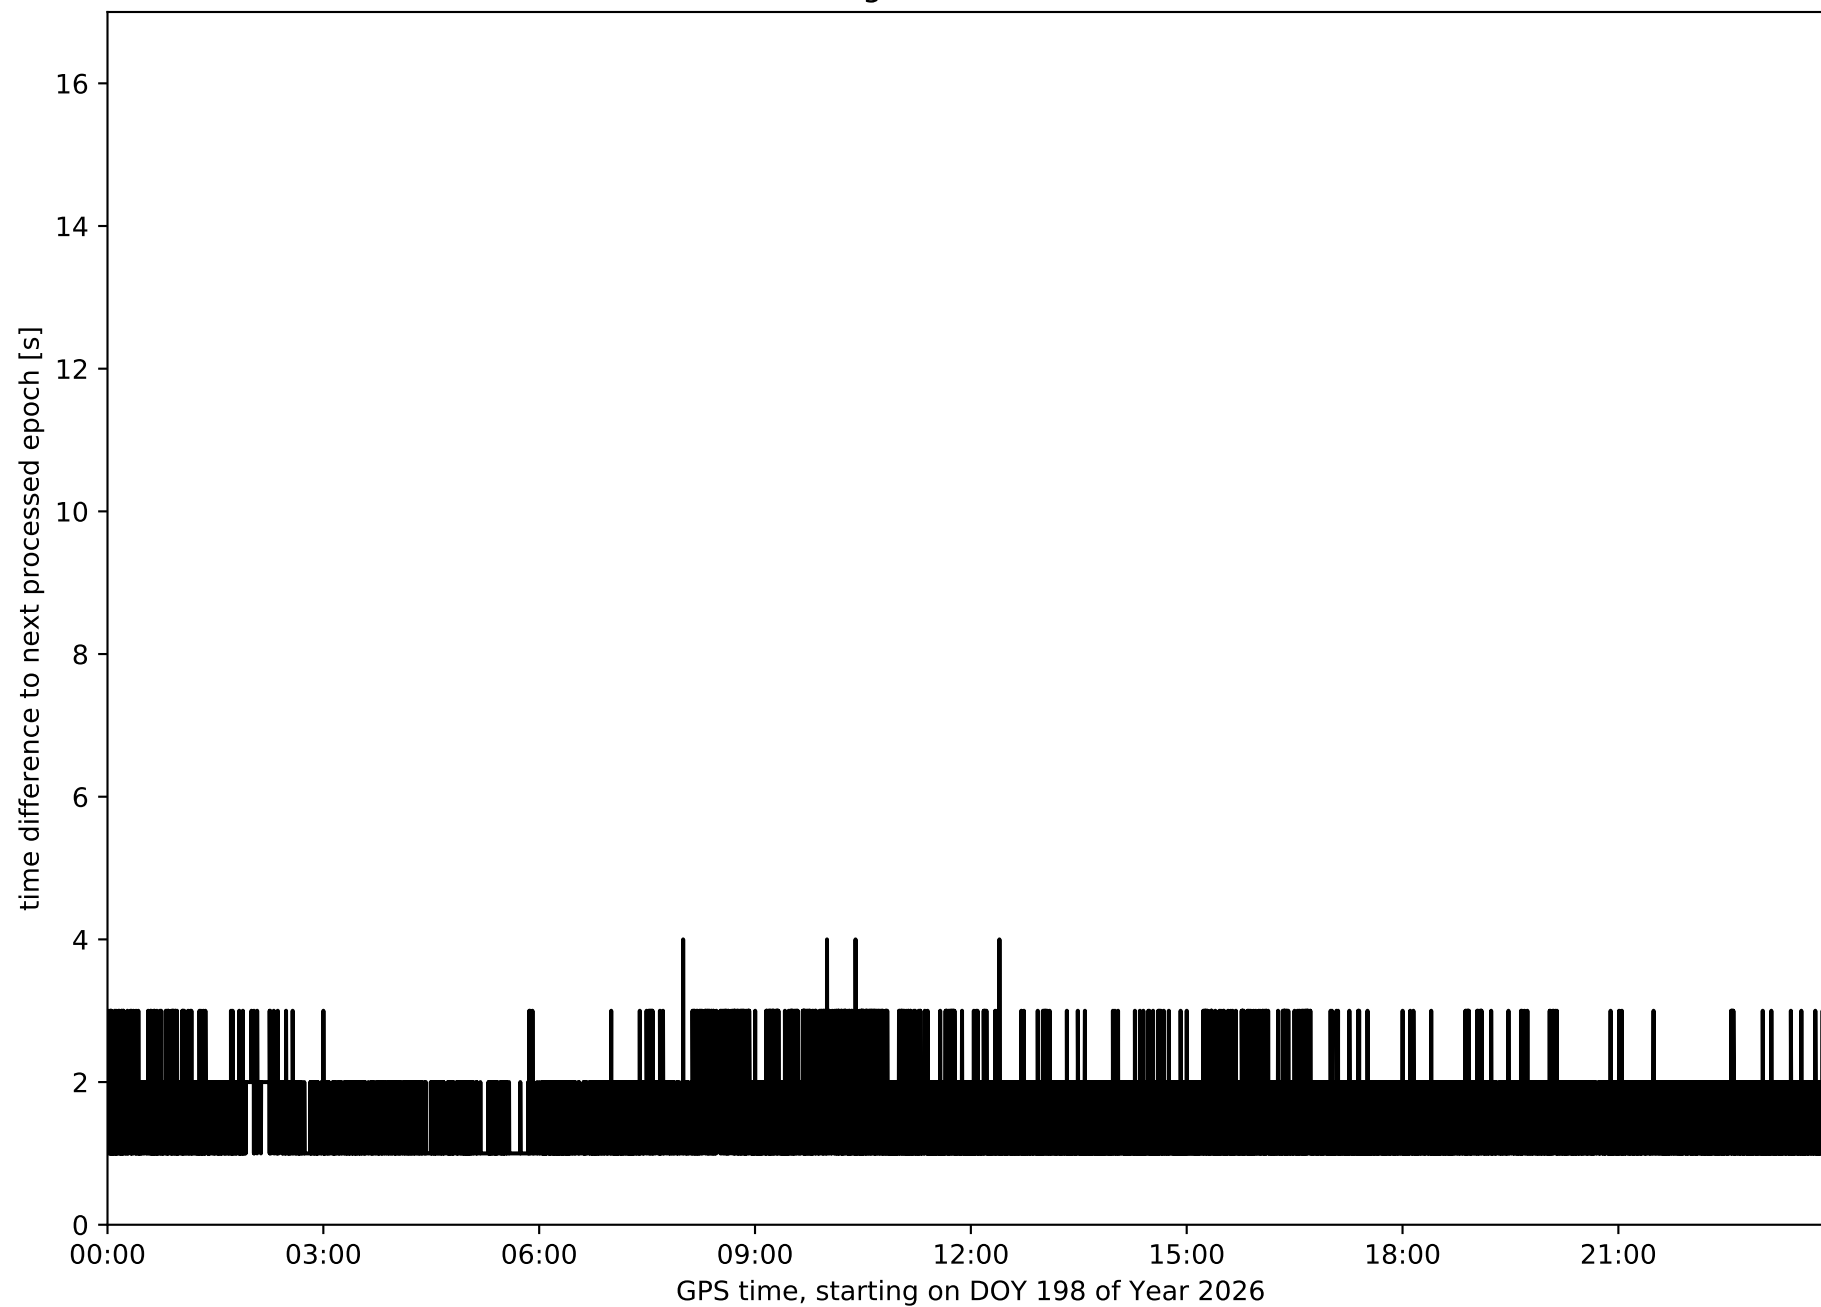


Histogram of the processing rate in network N32T (durations larger 15 seconds neglected)

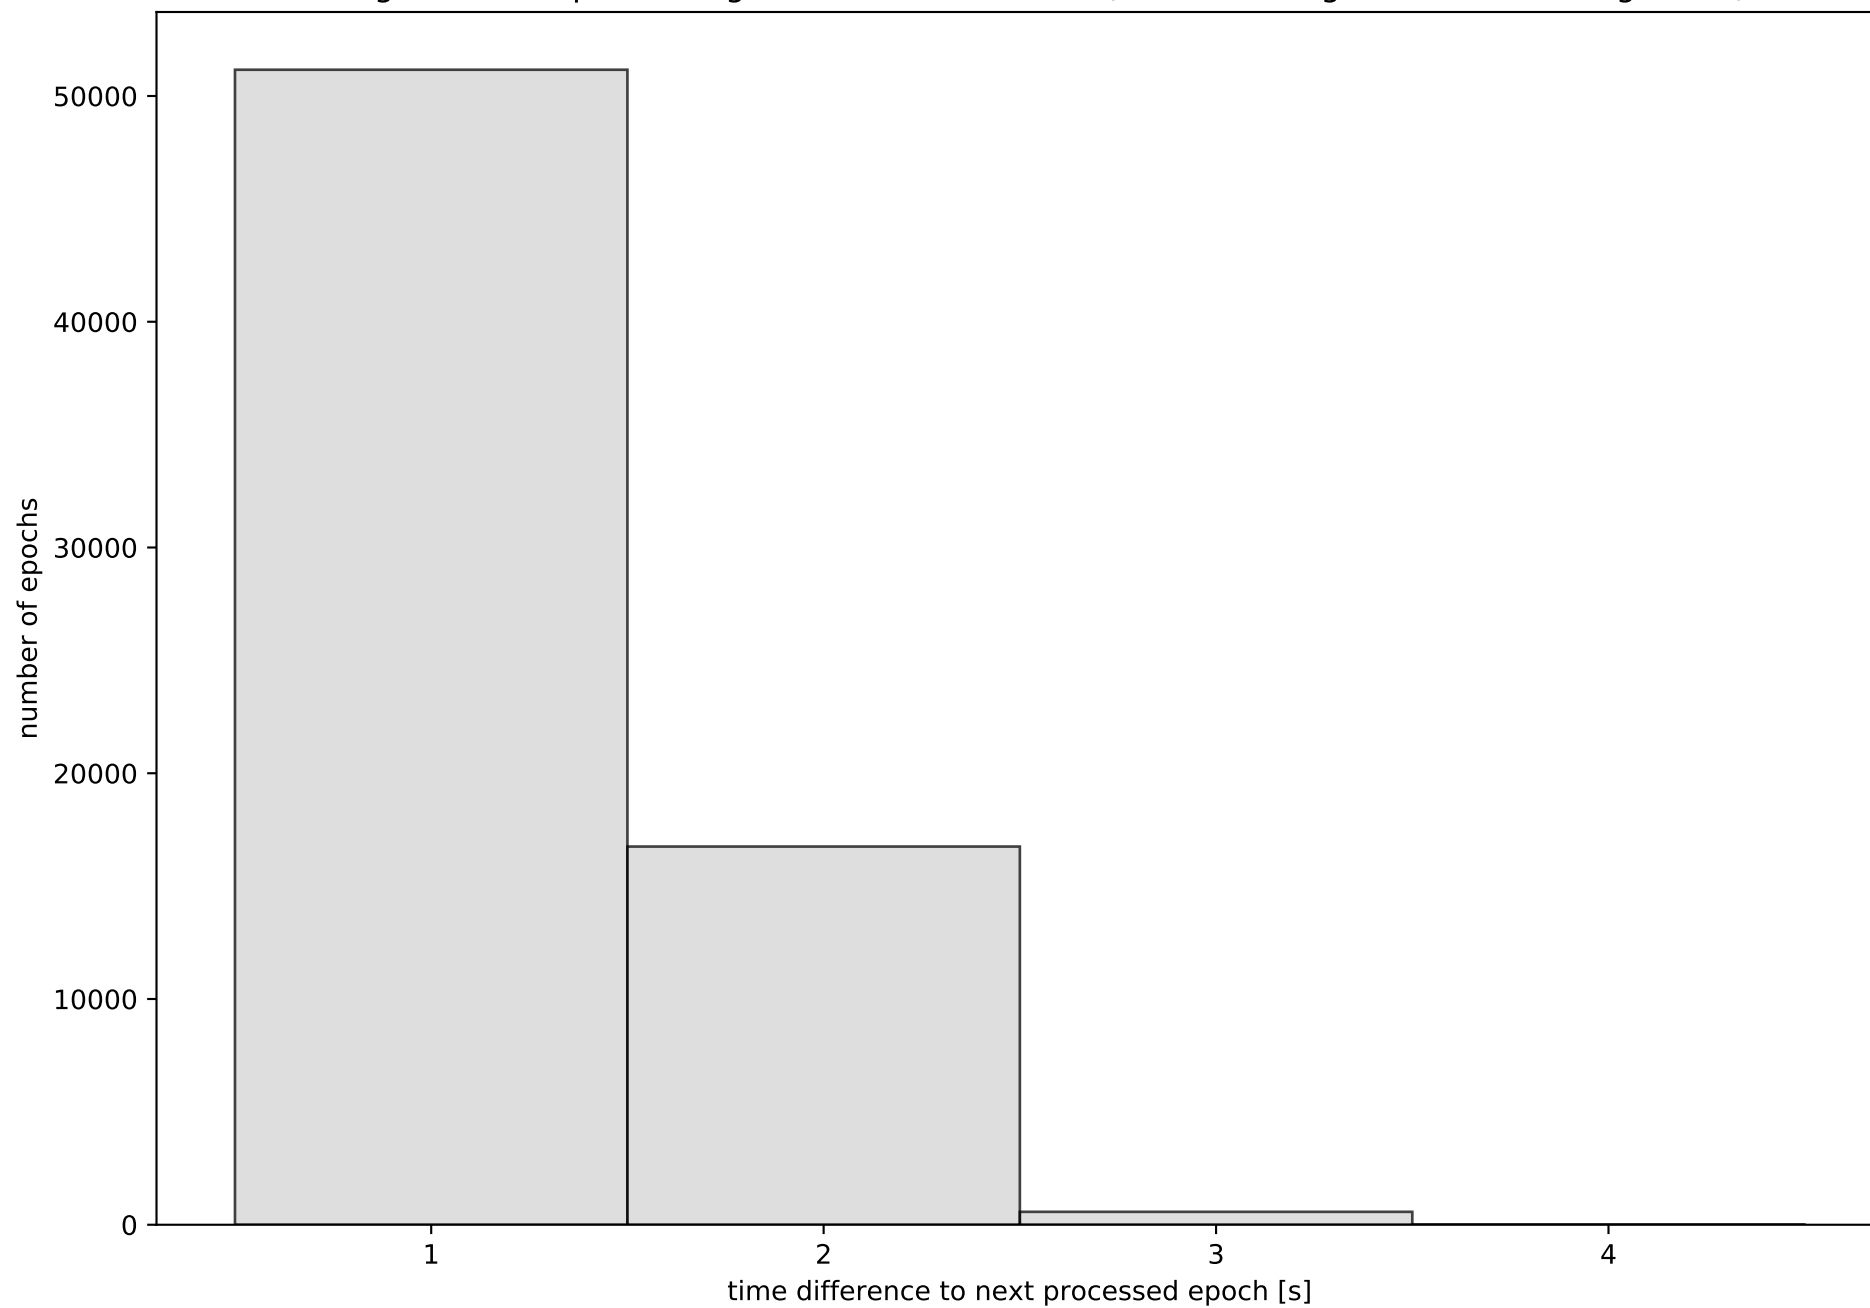


Network N32T with threshold set to 0.3

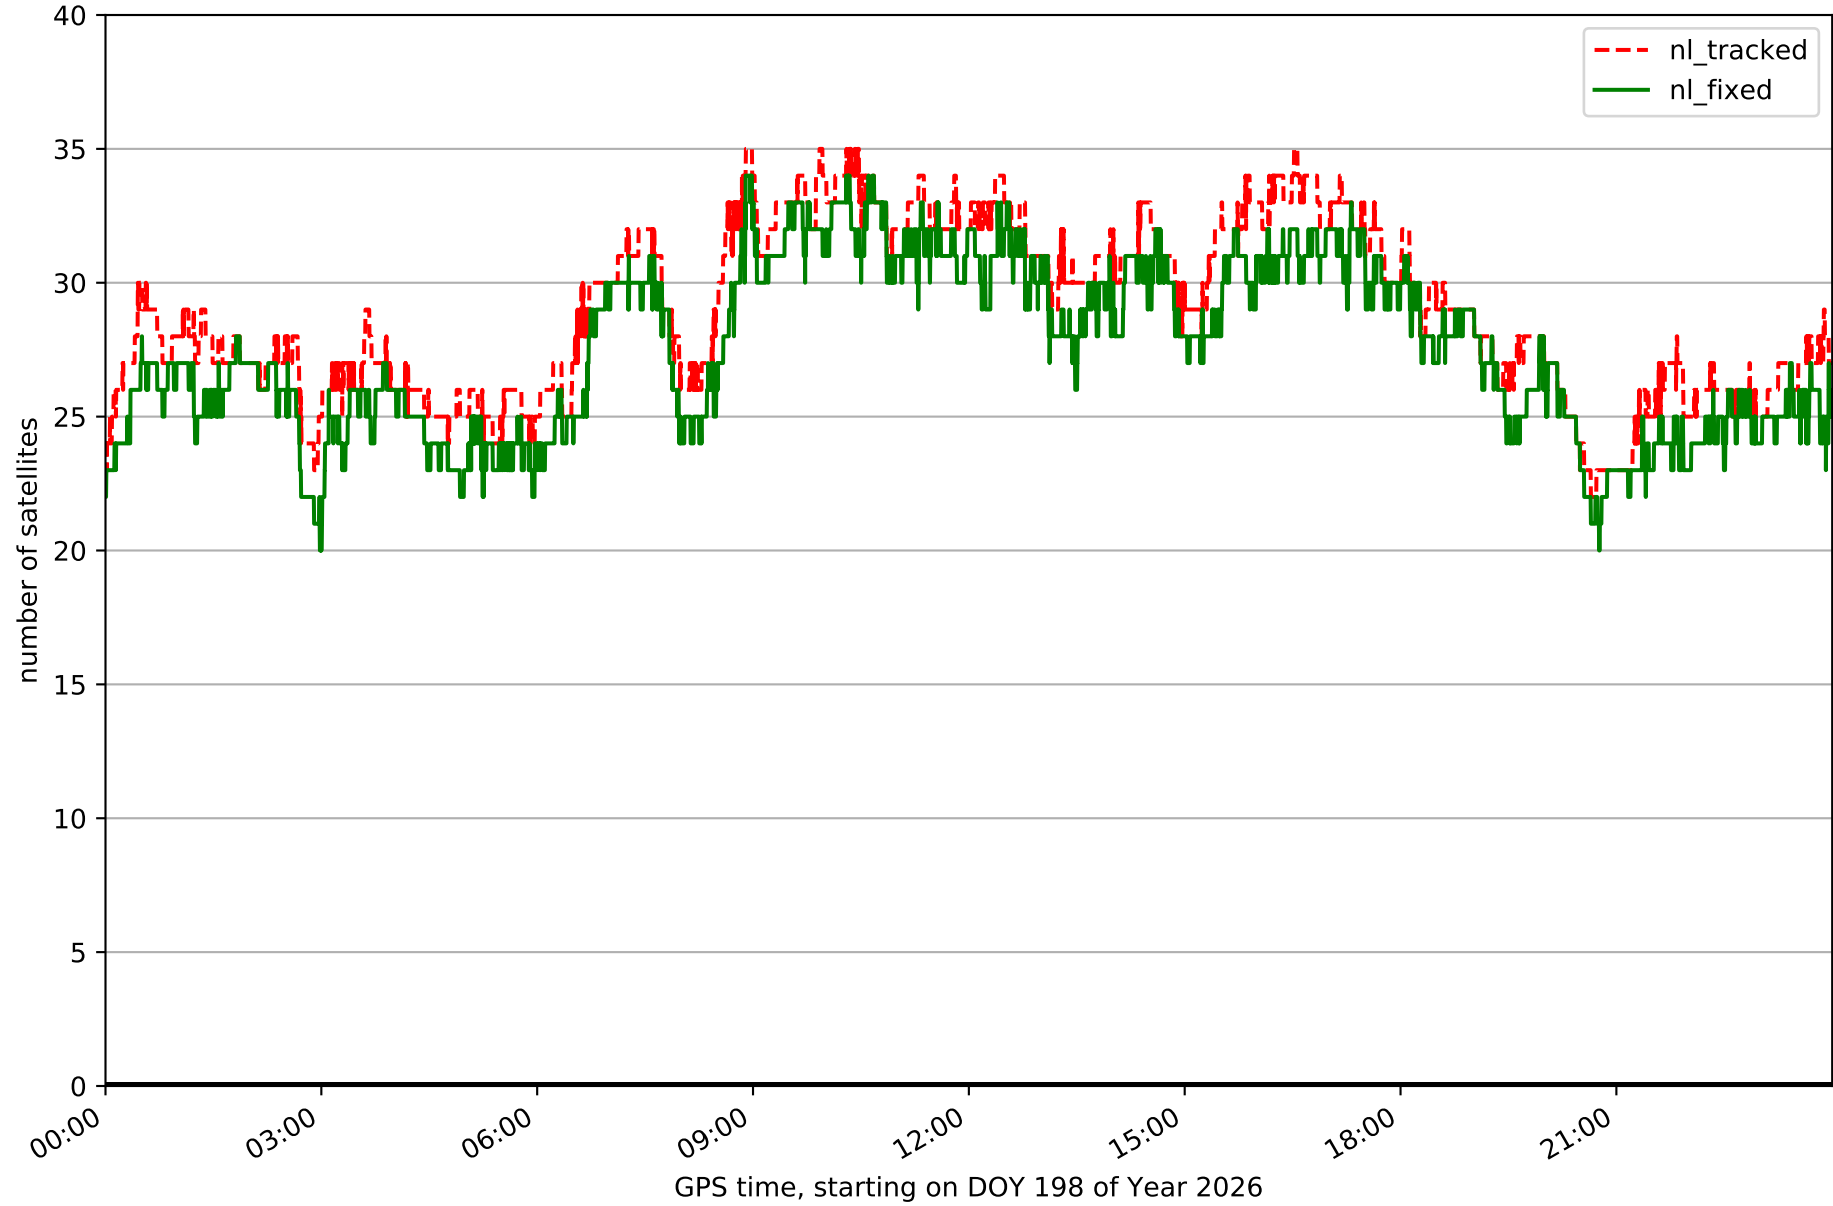


Fixing percentage of satellites in network N32T with threshold set to 0.3

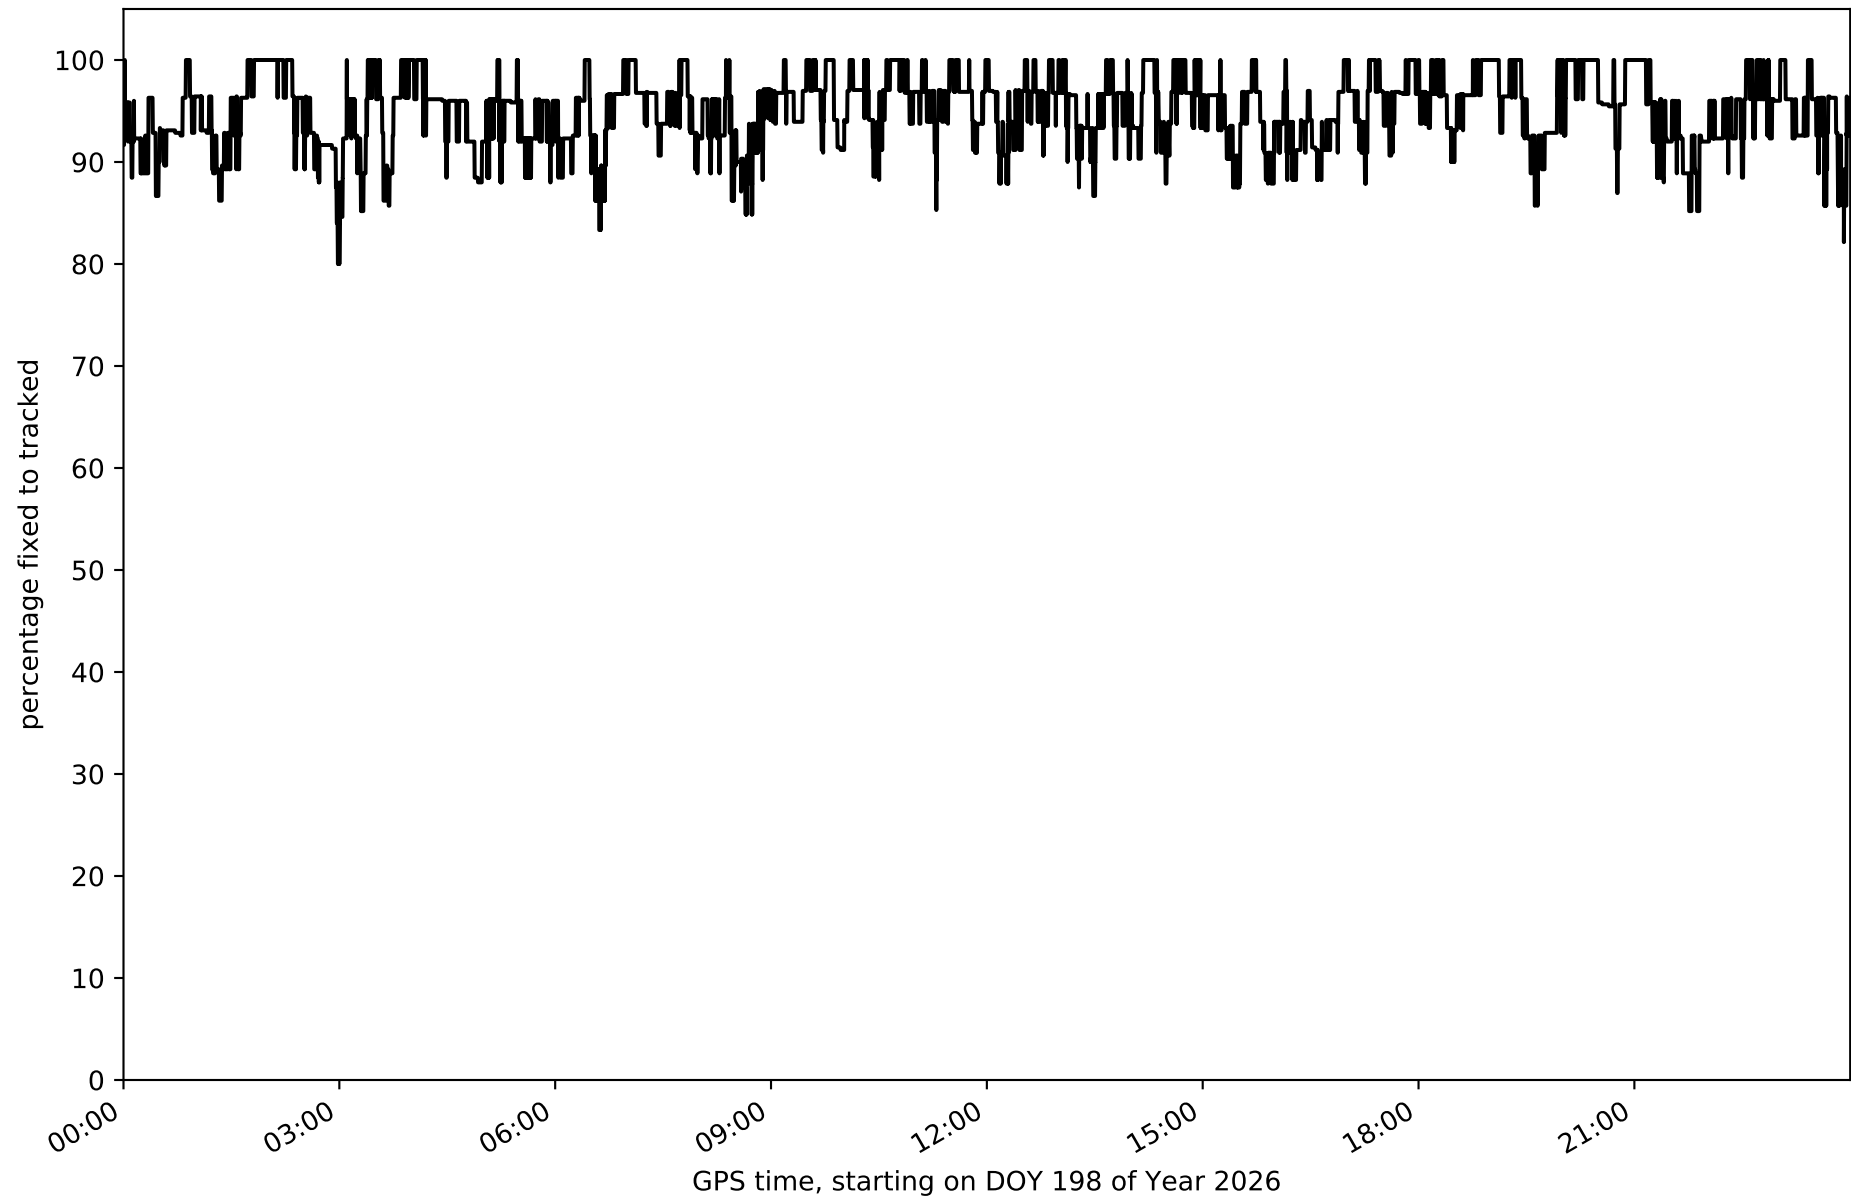


Network N32T - only GPS with threshold set to 0.3

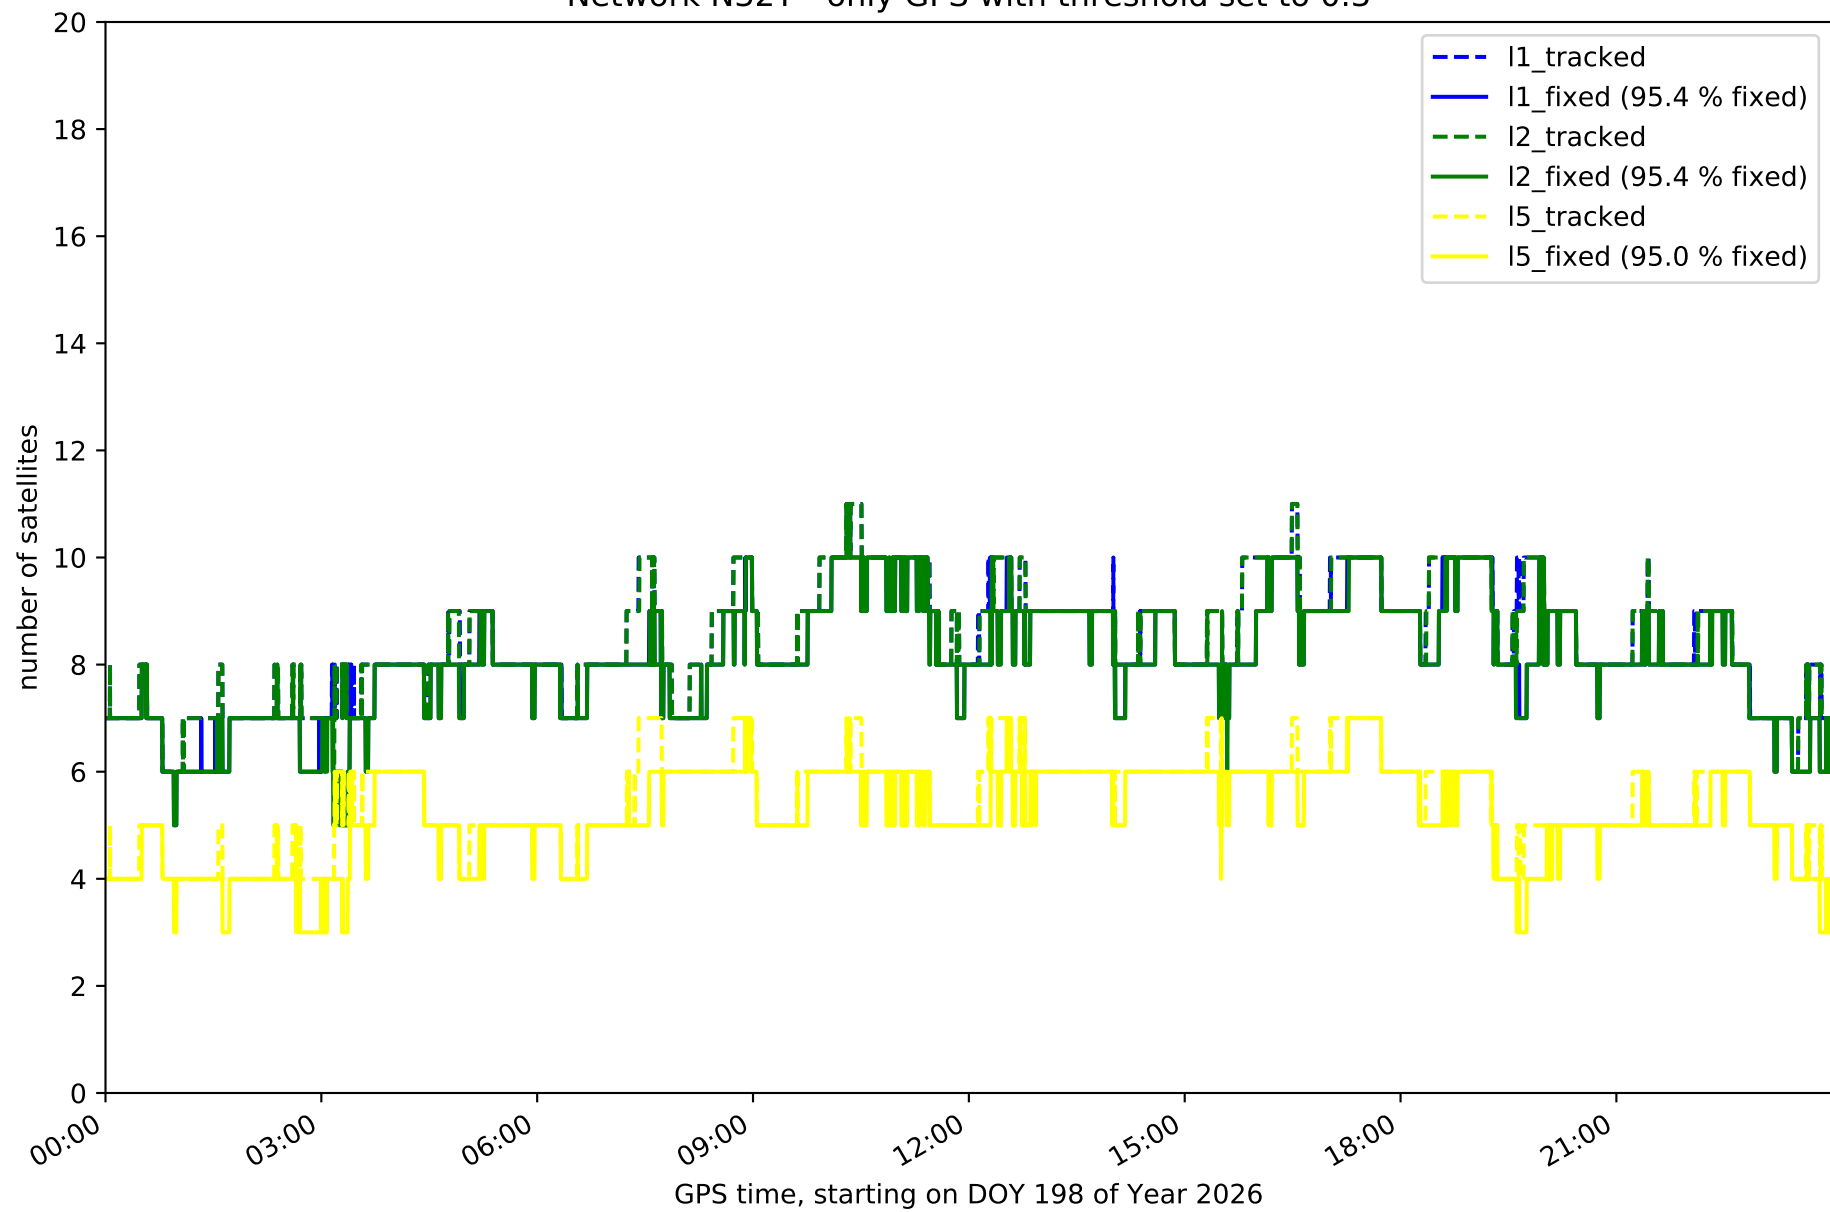


Network N32T - only GLONASS with threshold set to 0.3

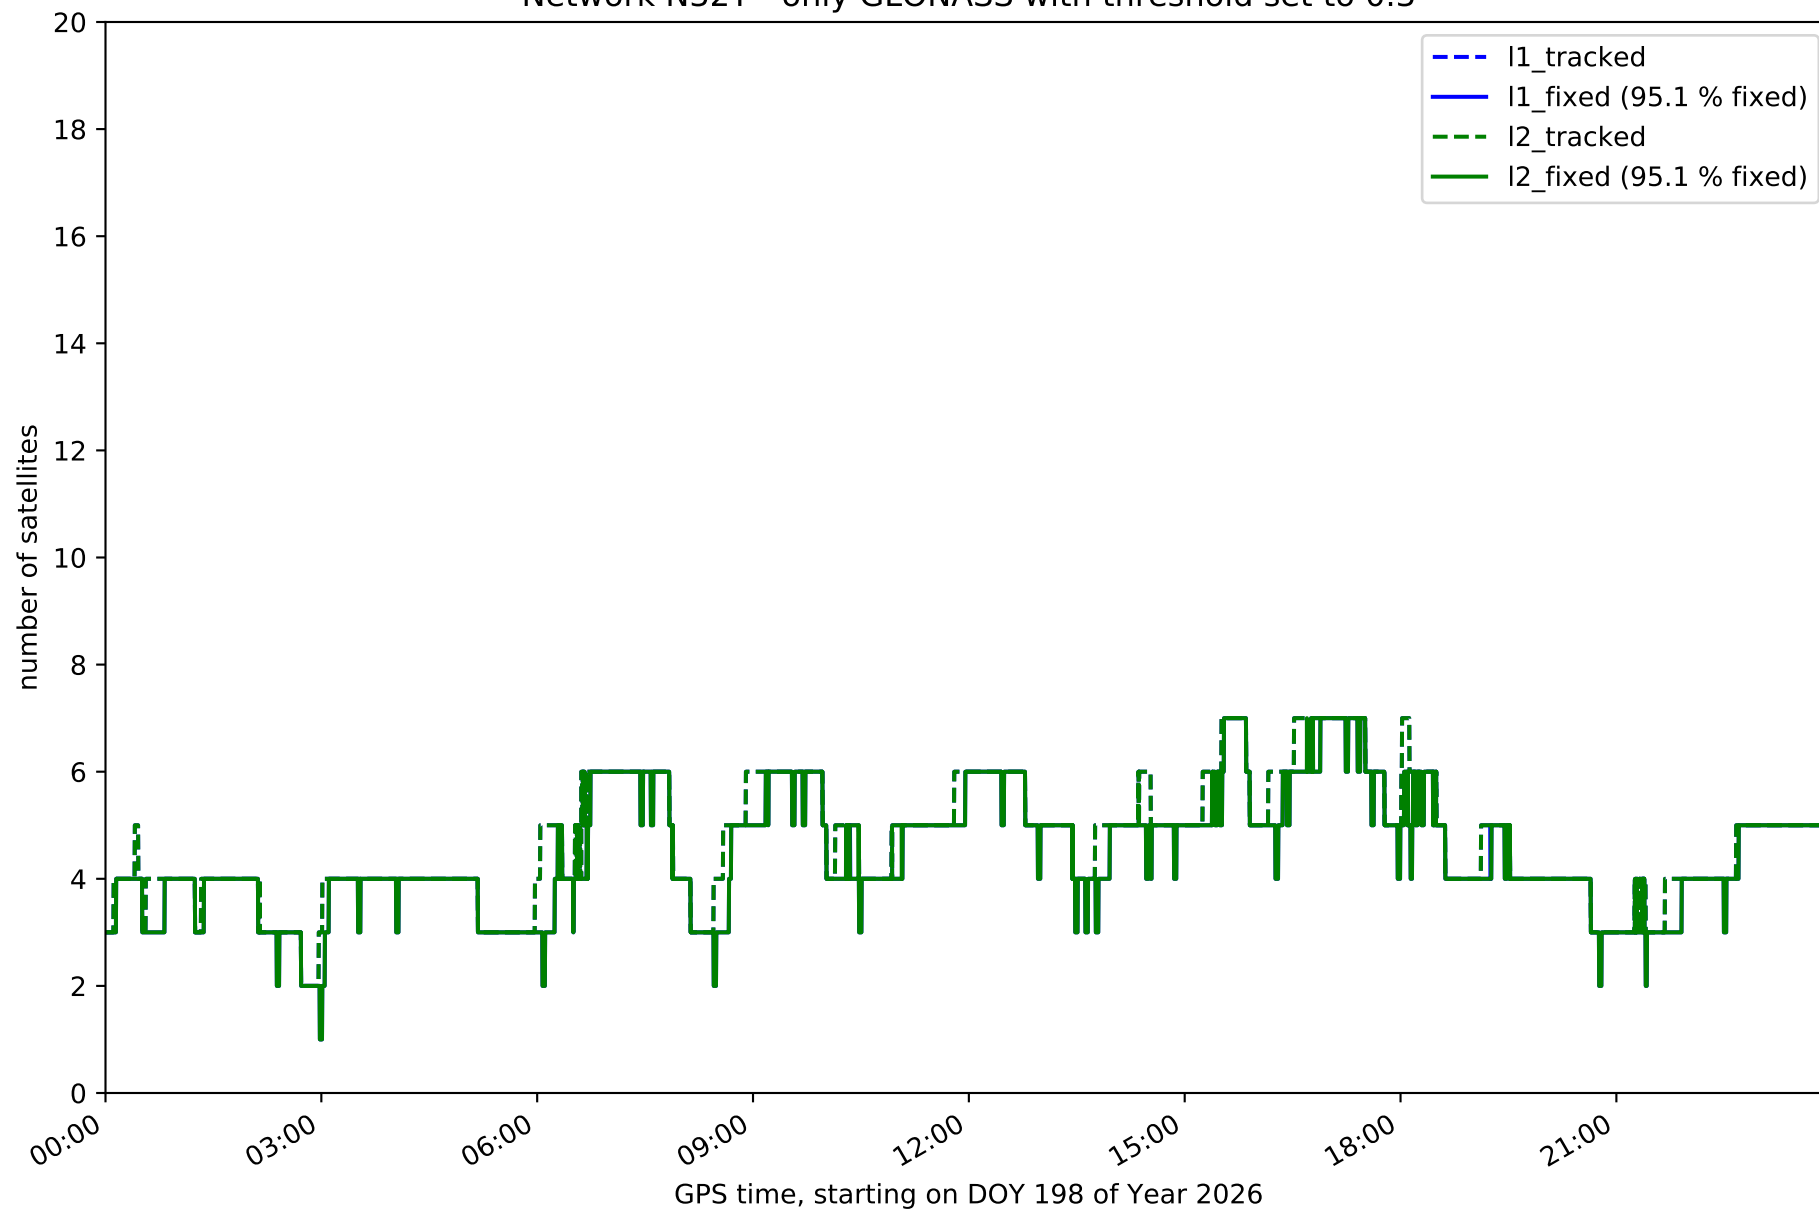


Network N32T - only BDS with threshold set to 0.3

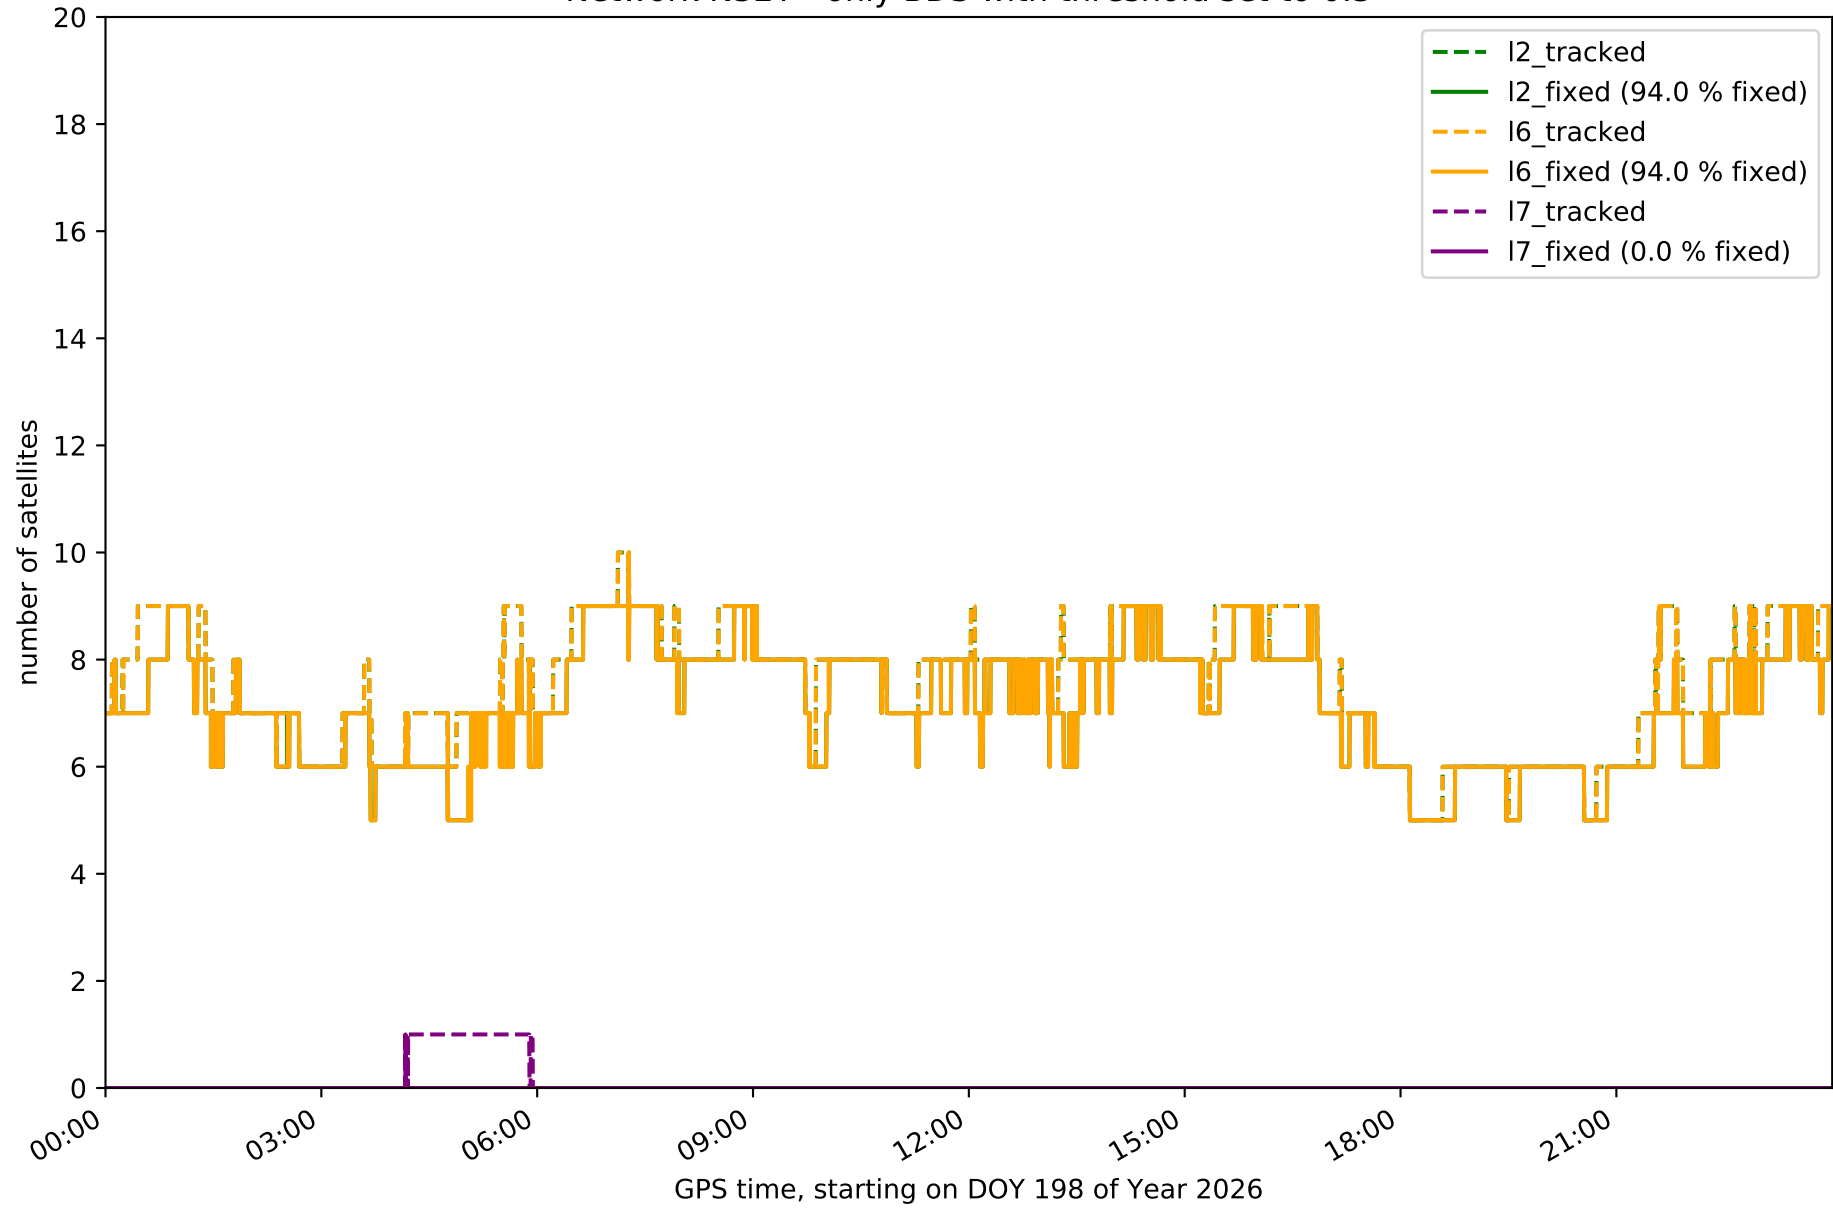


Network N32T - only Galileo with threshold set to 0.3

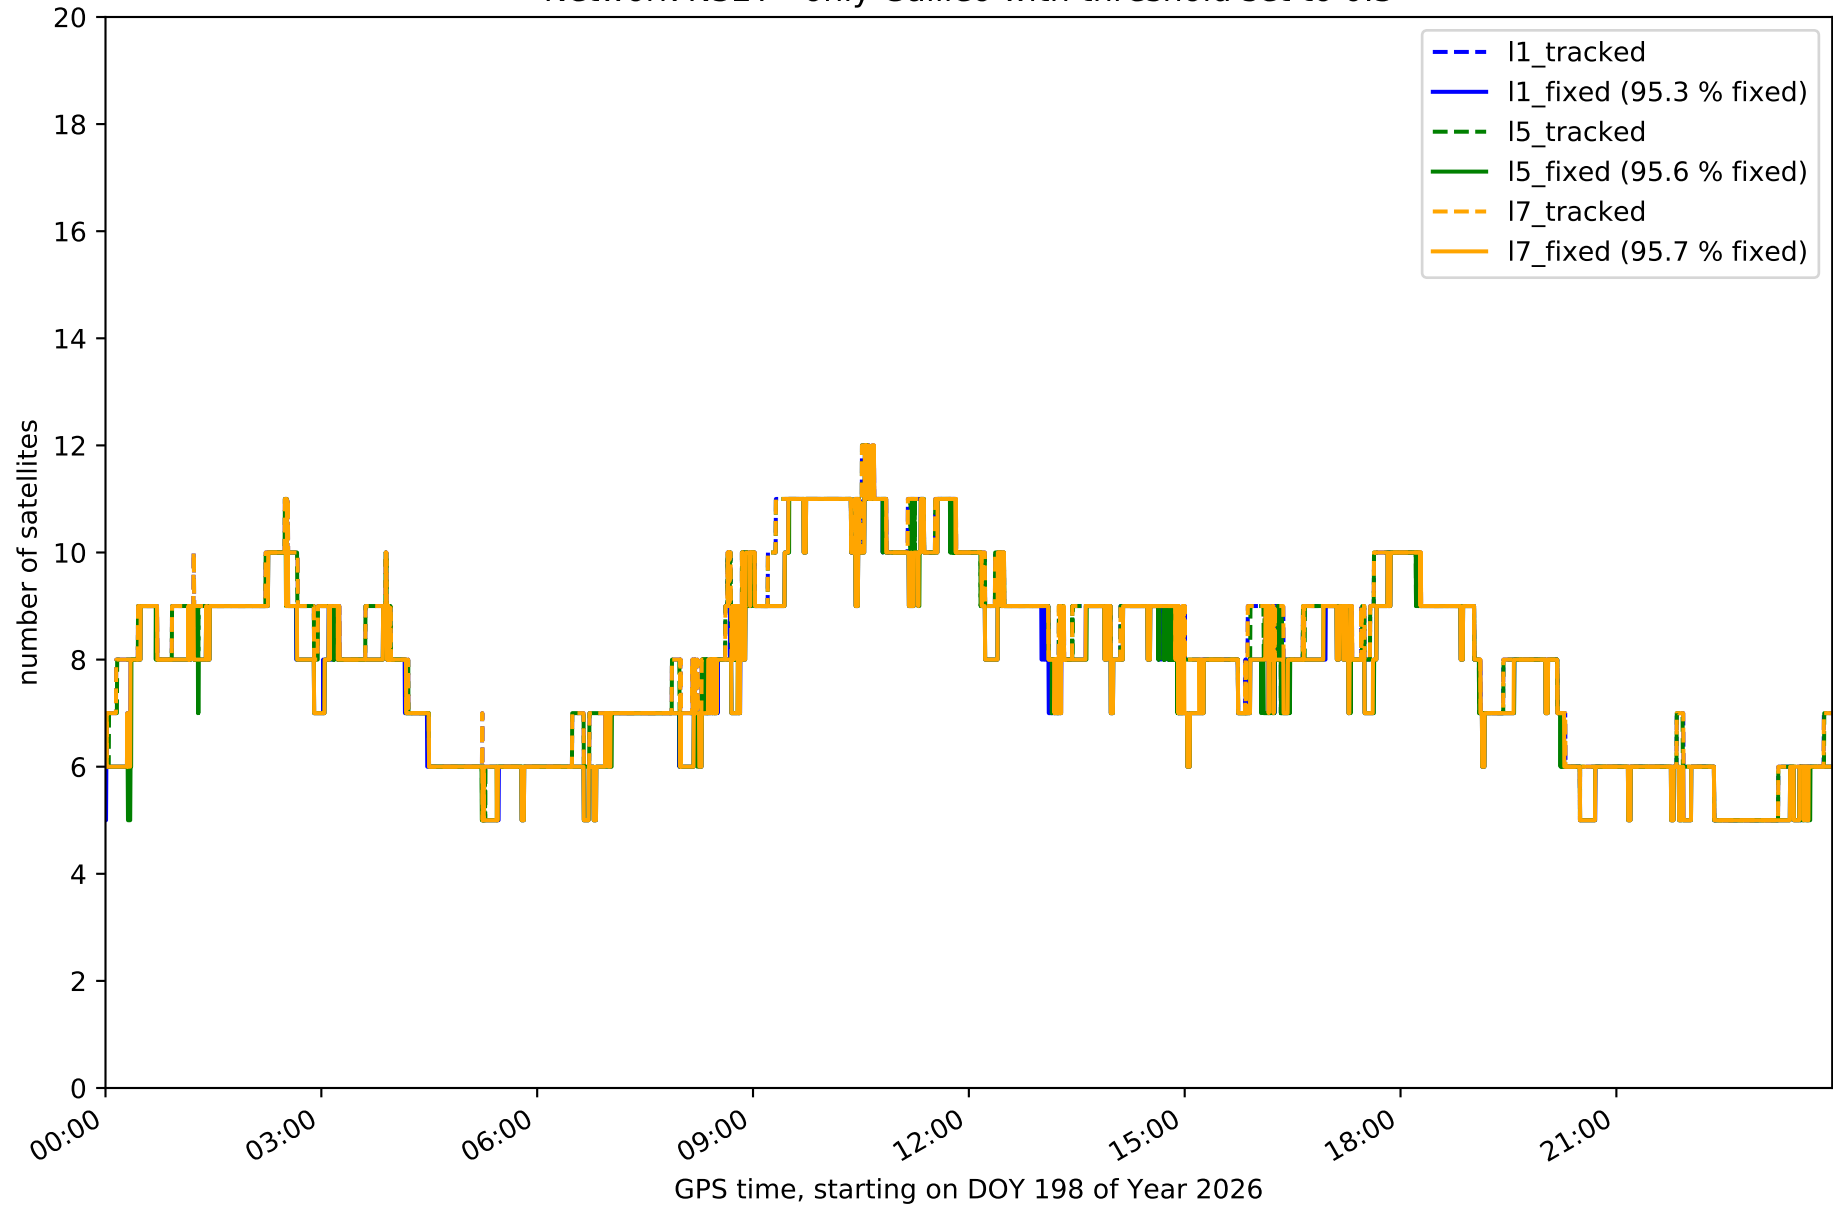


Station EH01 in network N32T

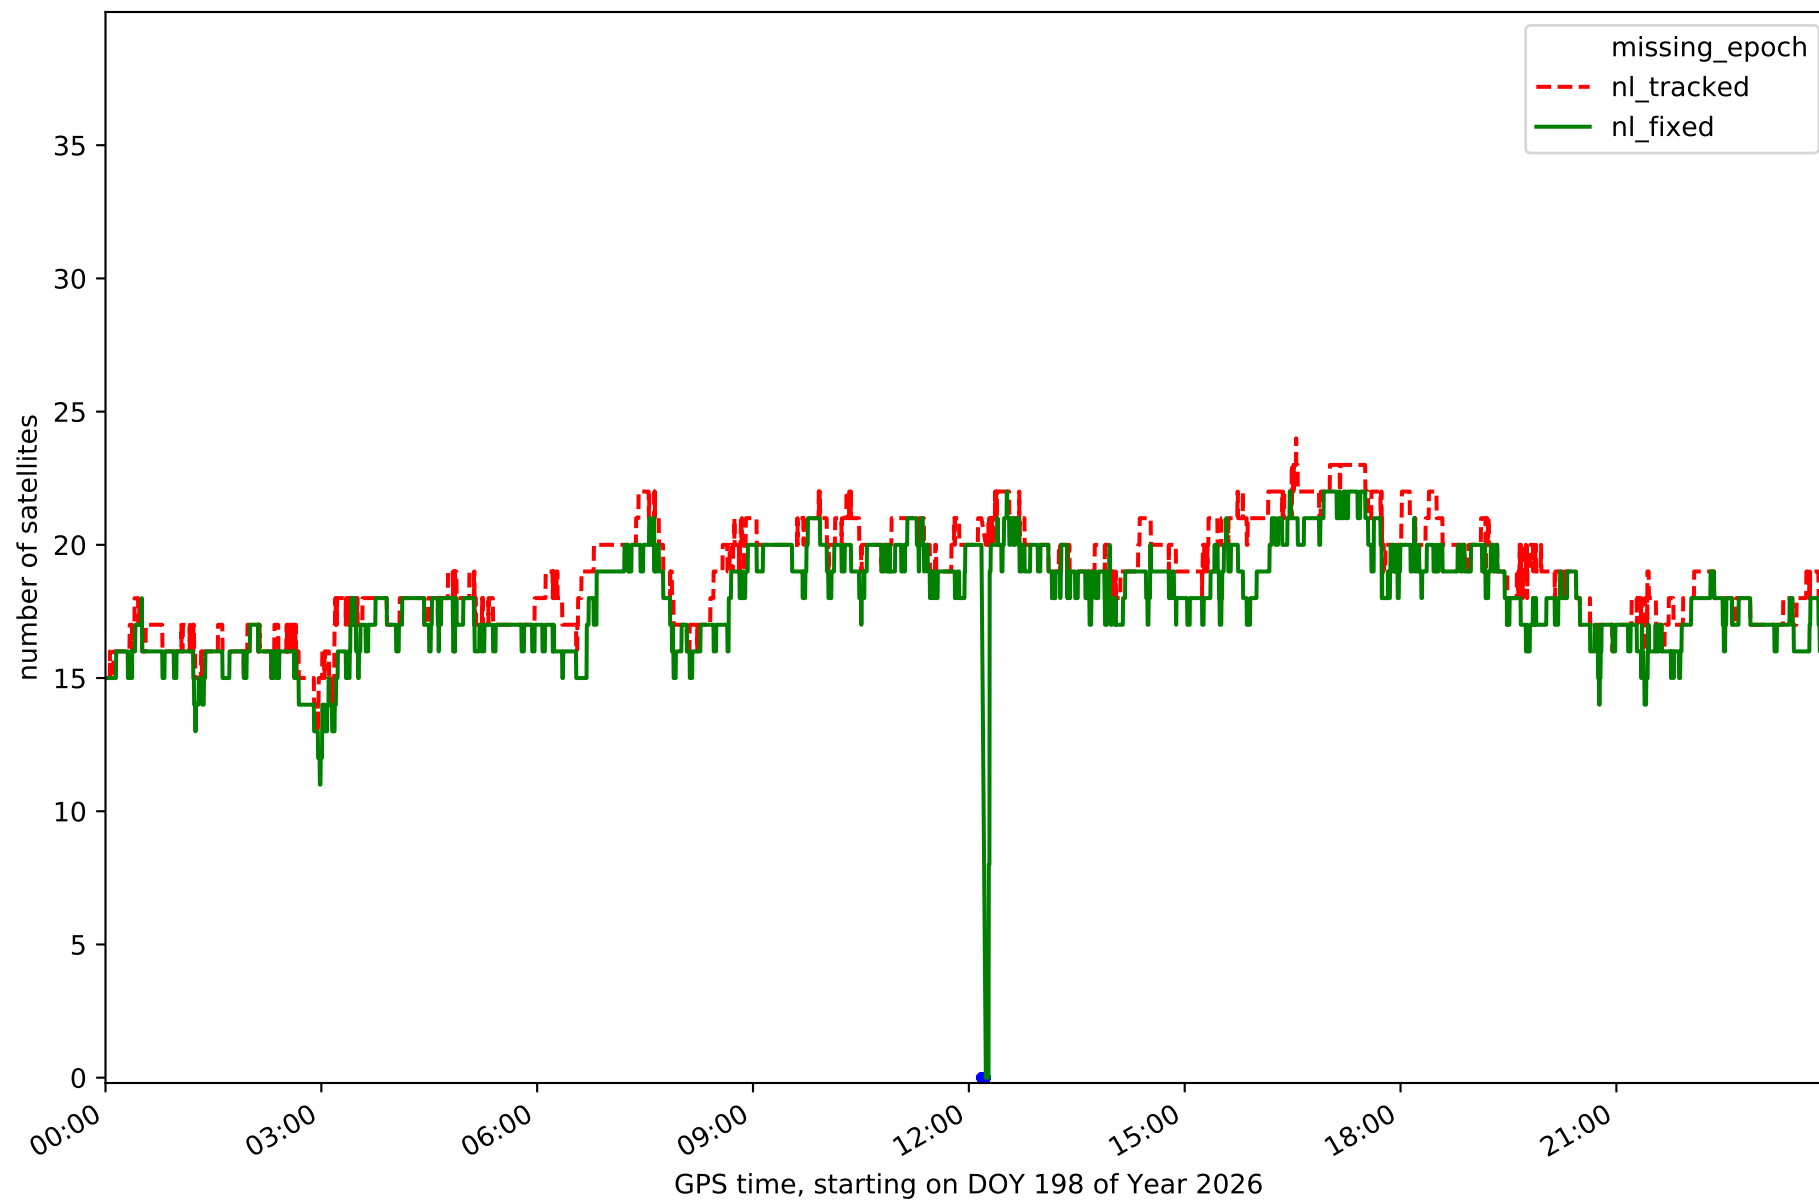


Station EH02 in network N32T

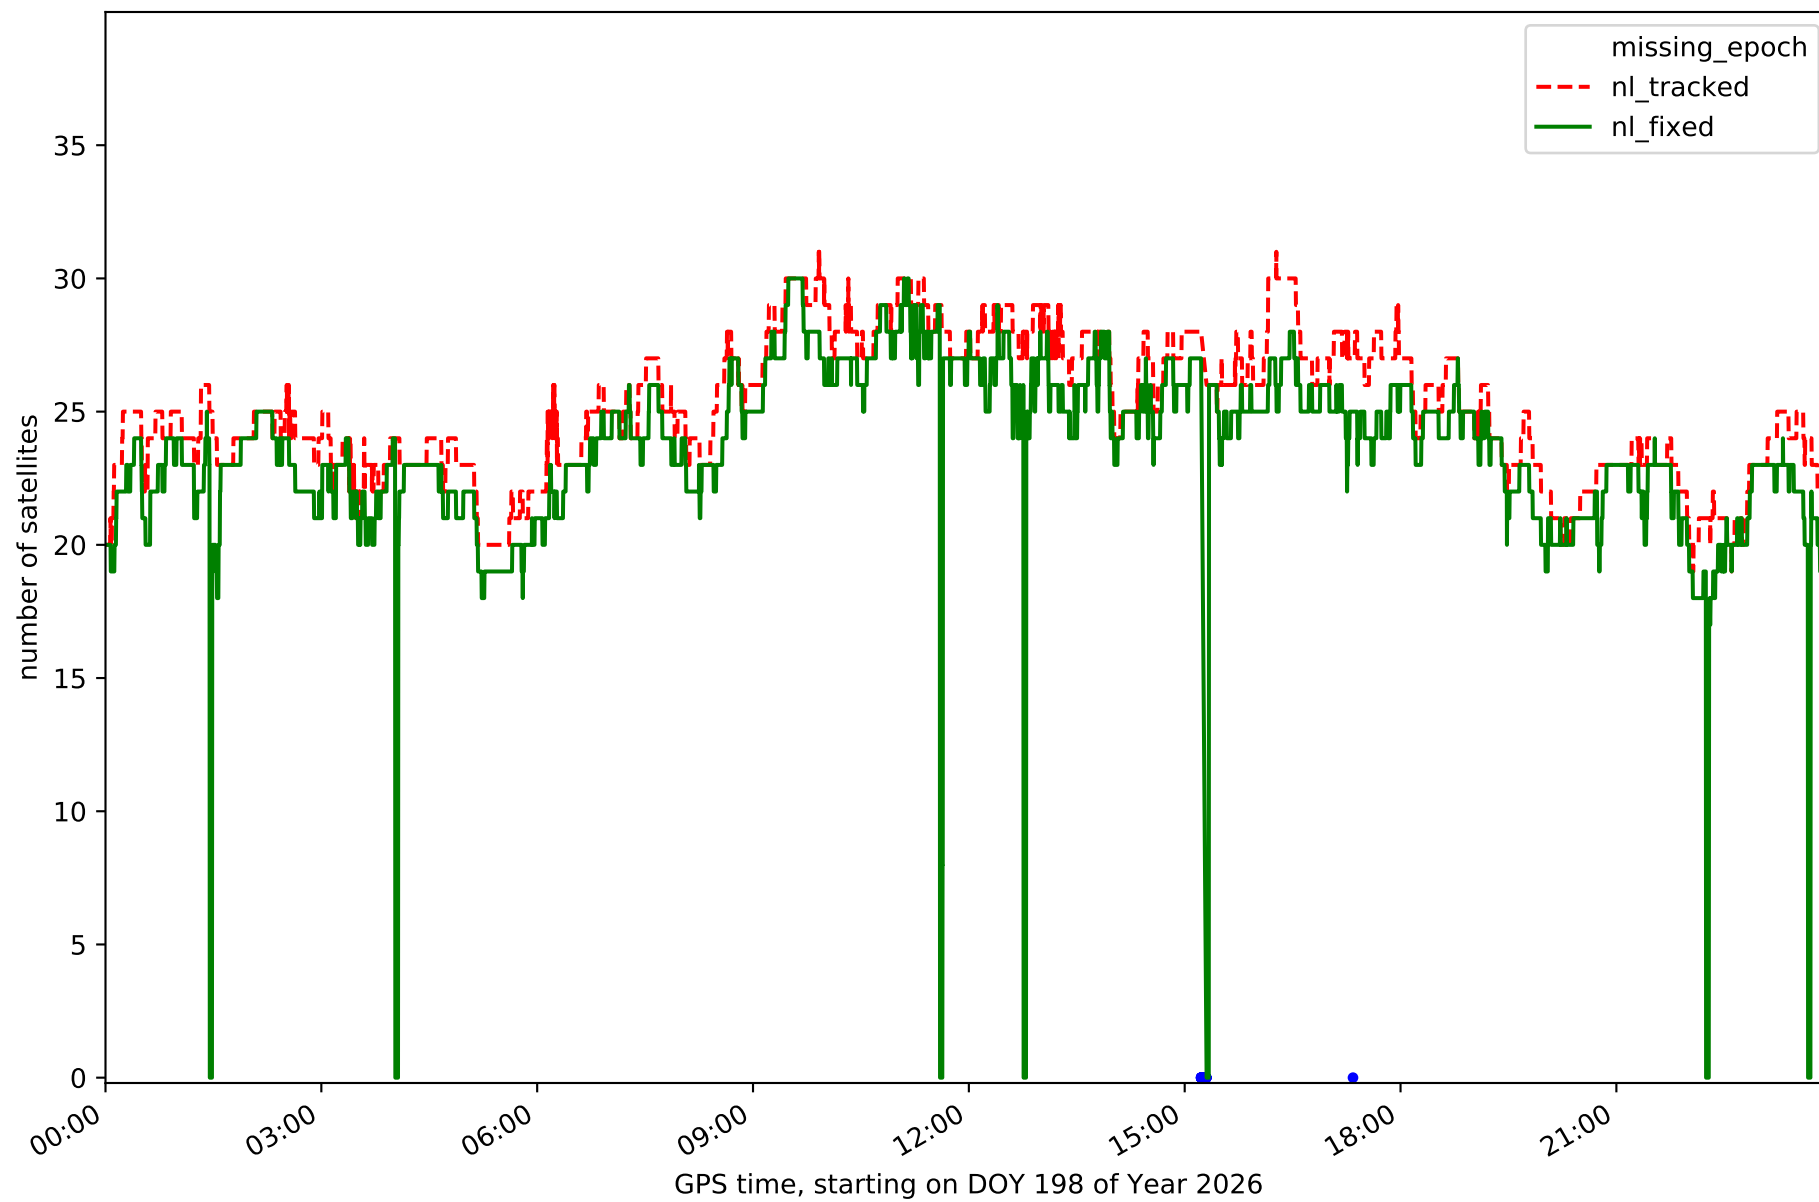


Station GOM1 in network N32T

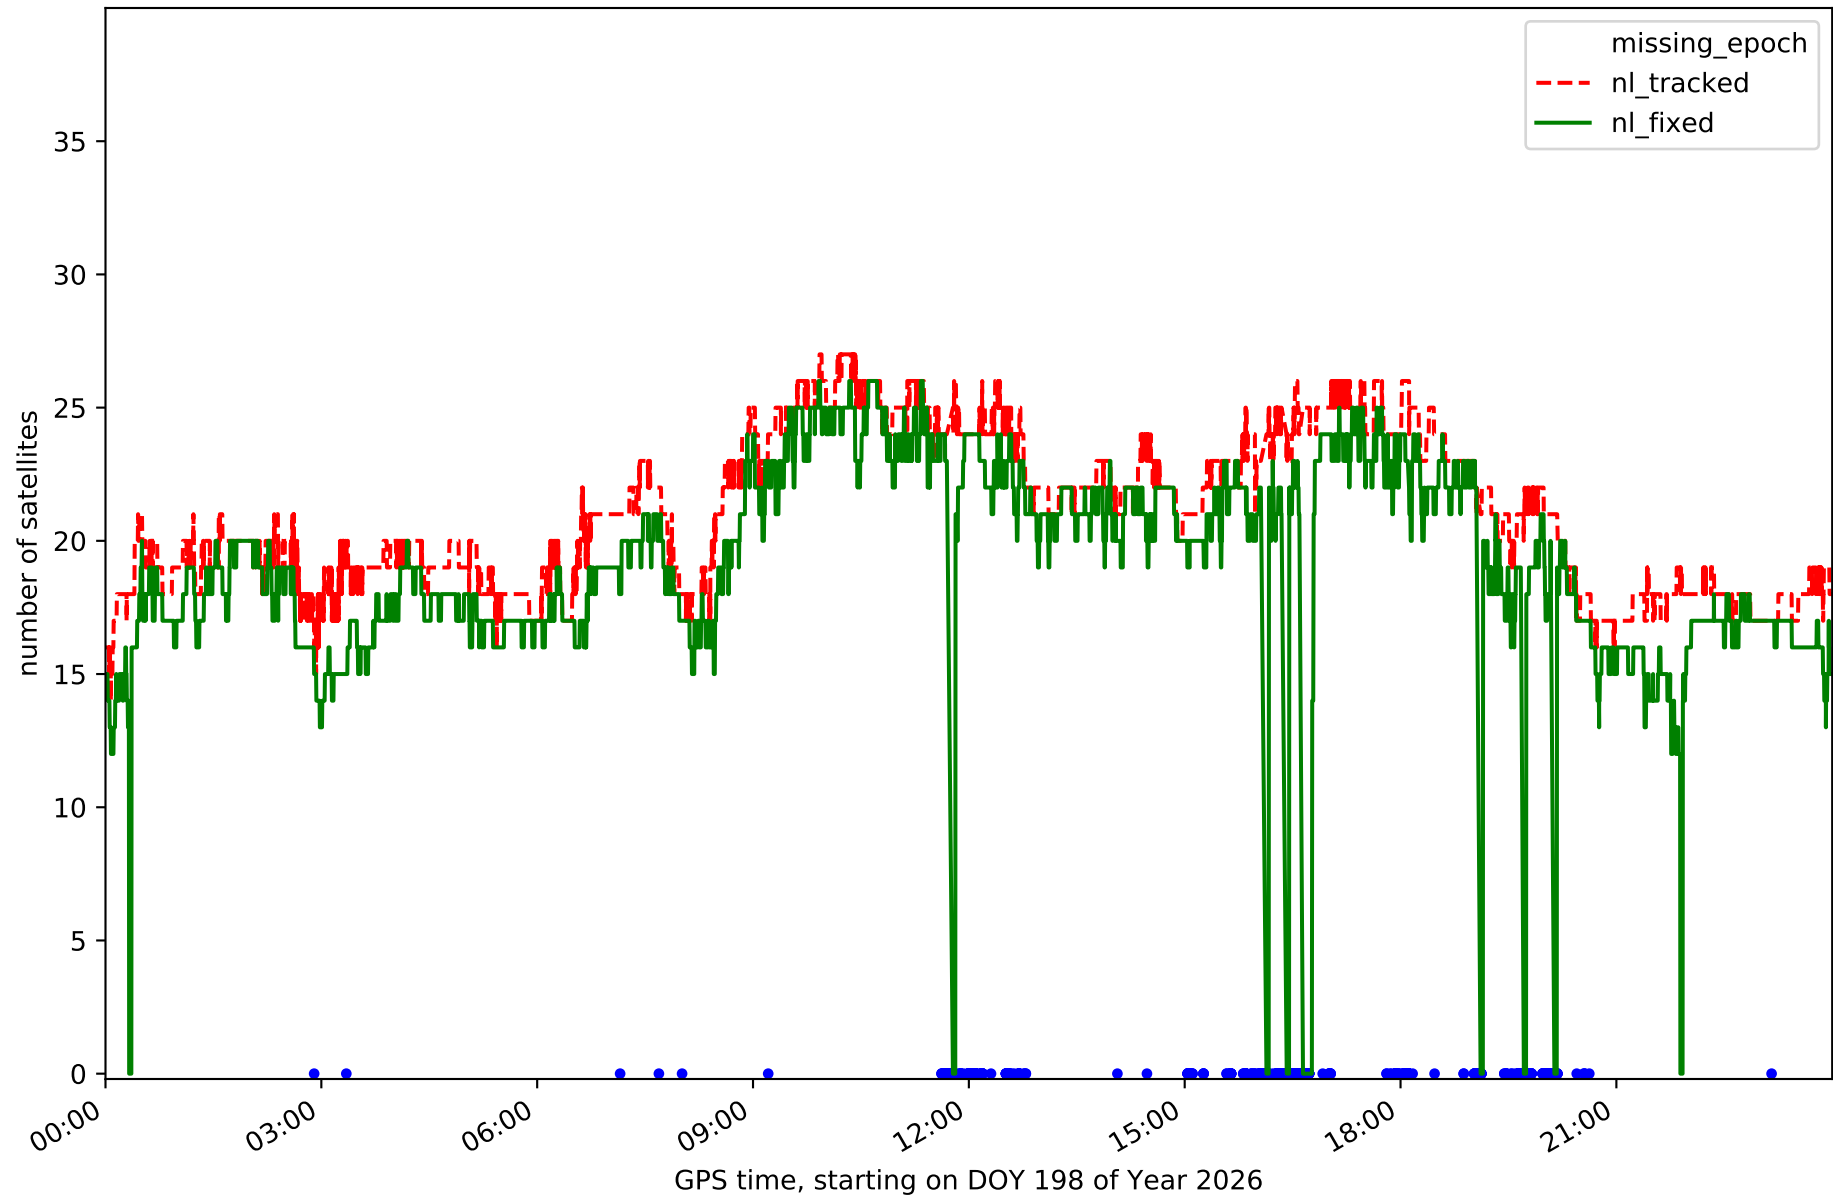


Station GOME in network N32T

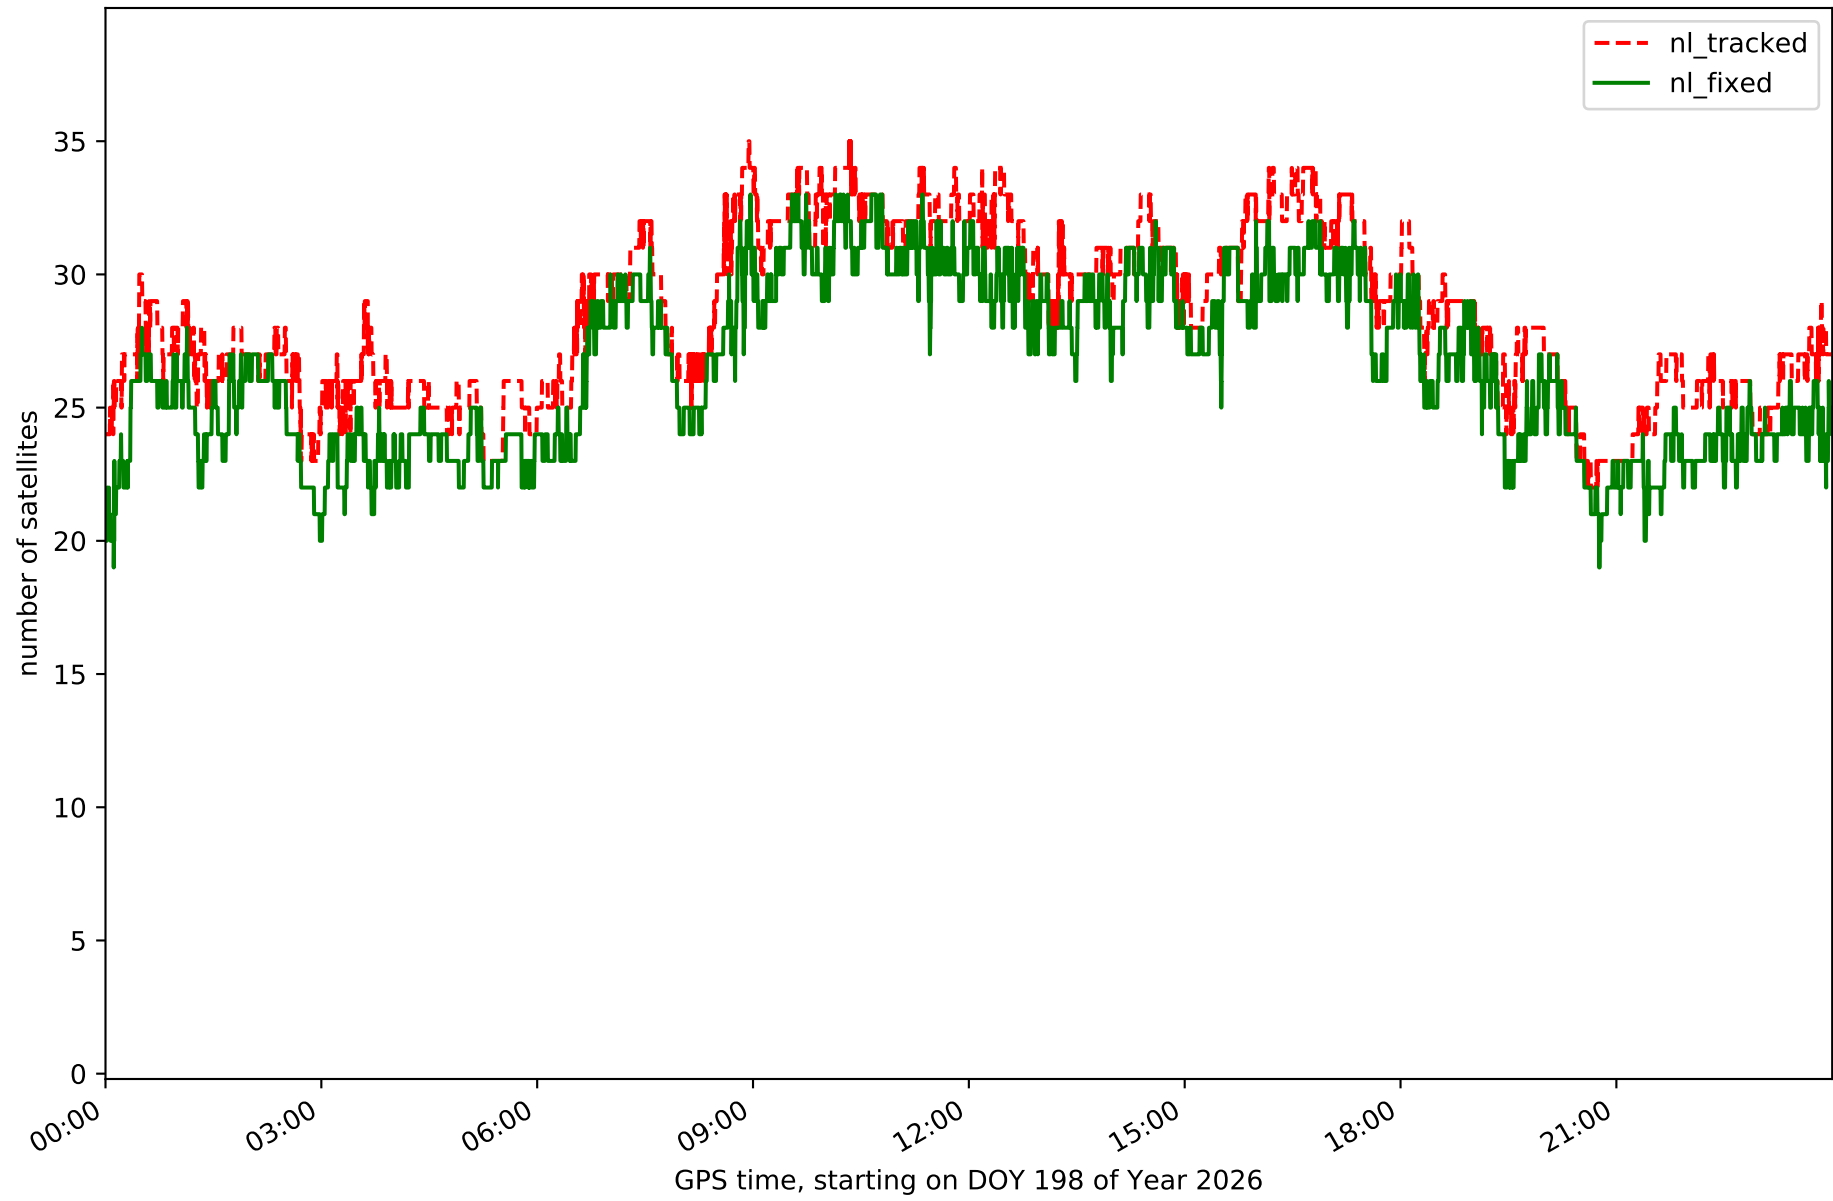


Station IZAN in network N32T

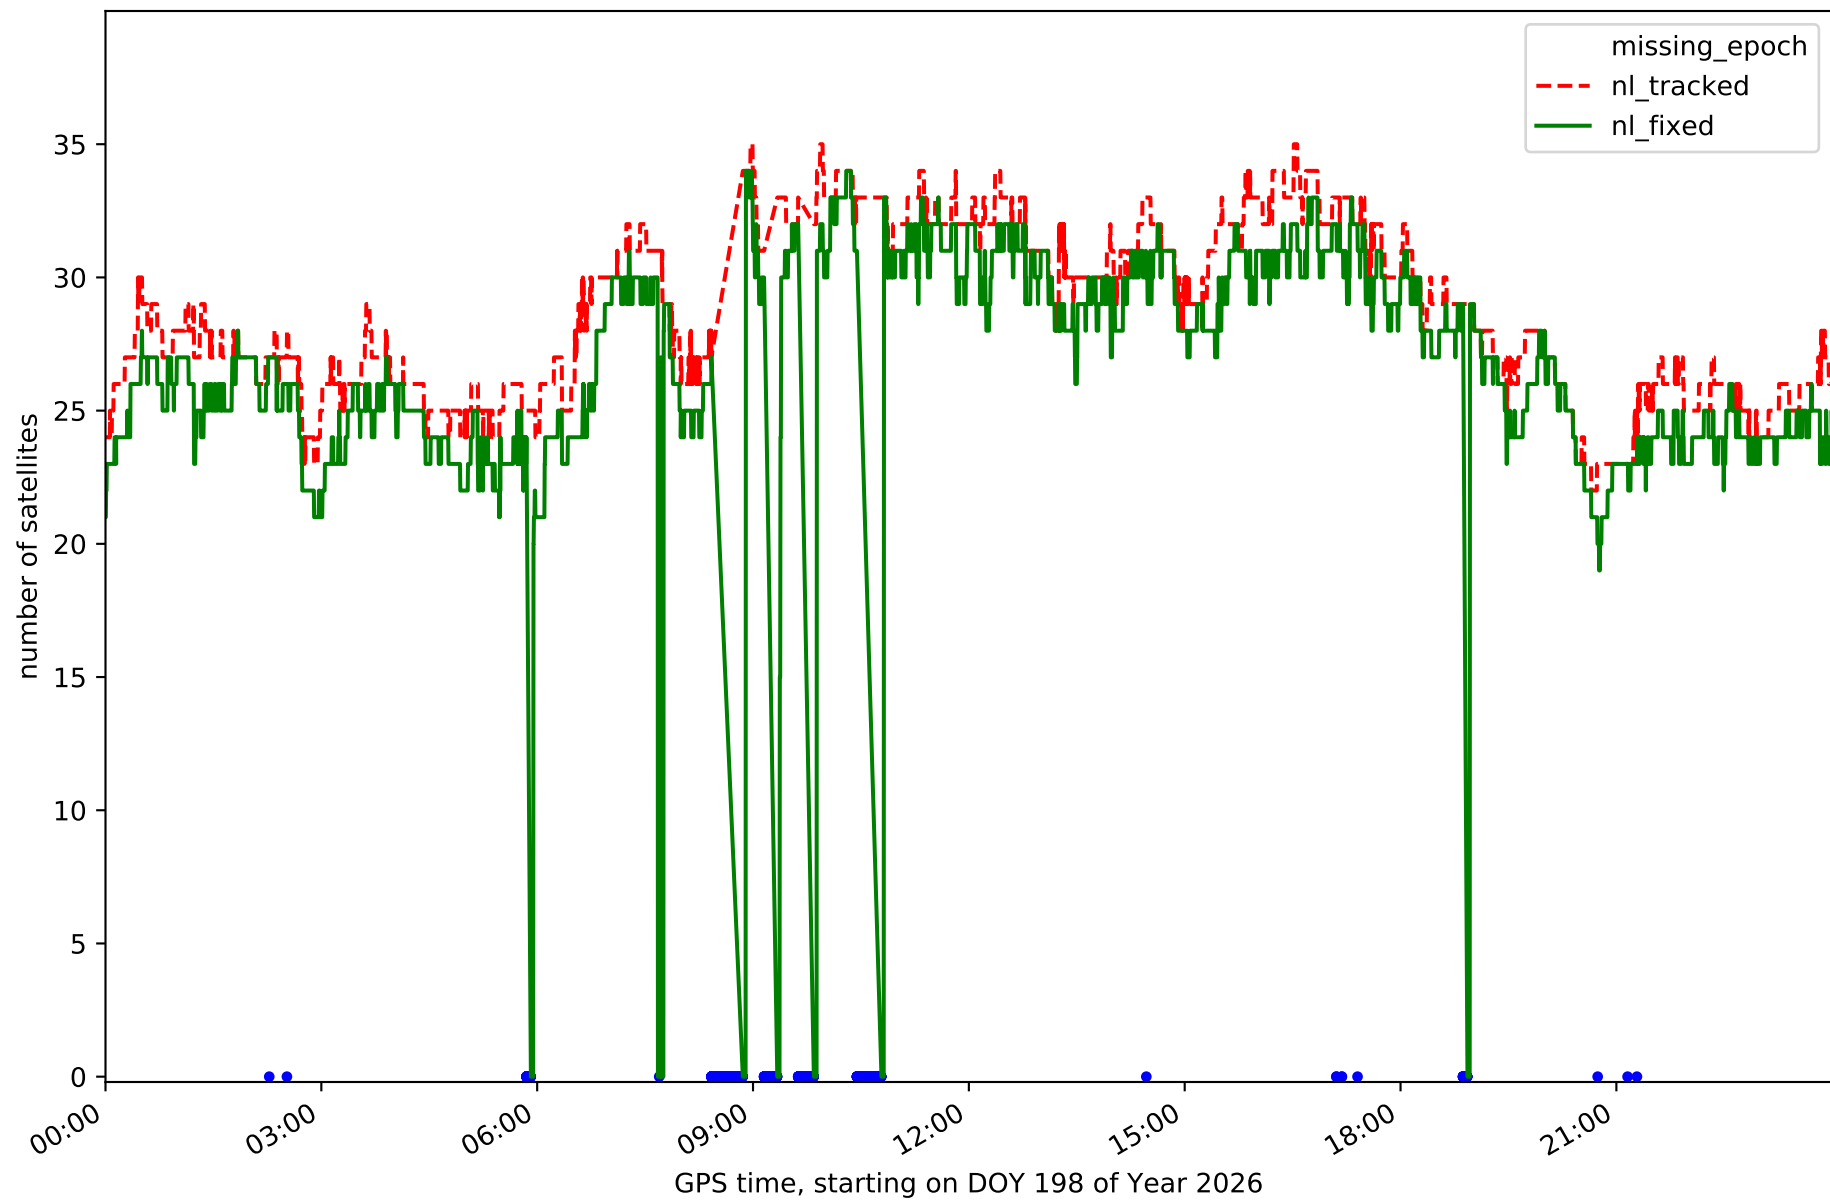


Station LP01 in network N32T

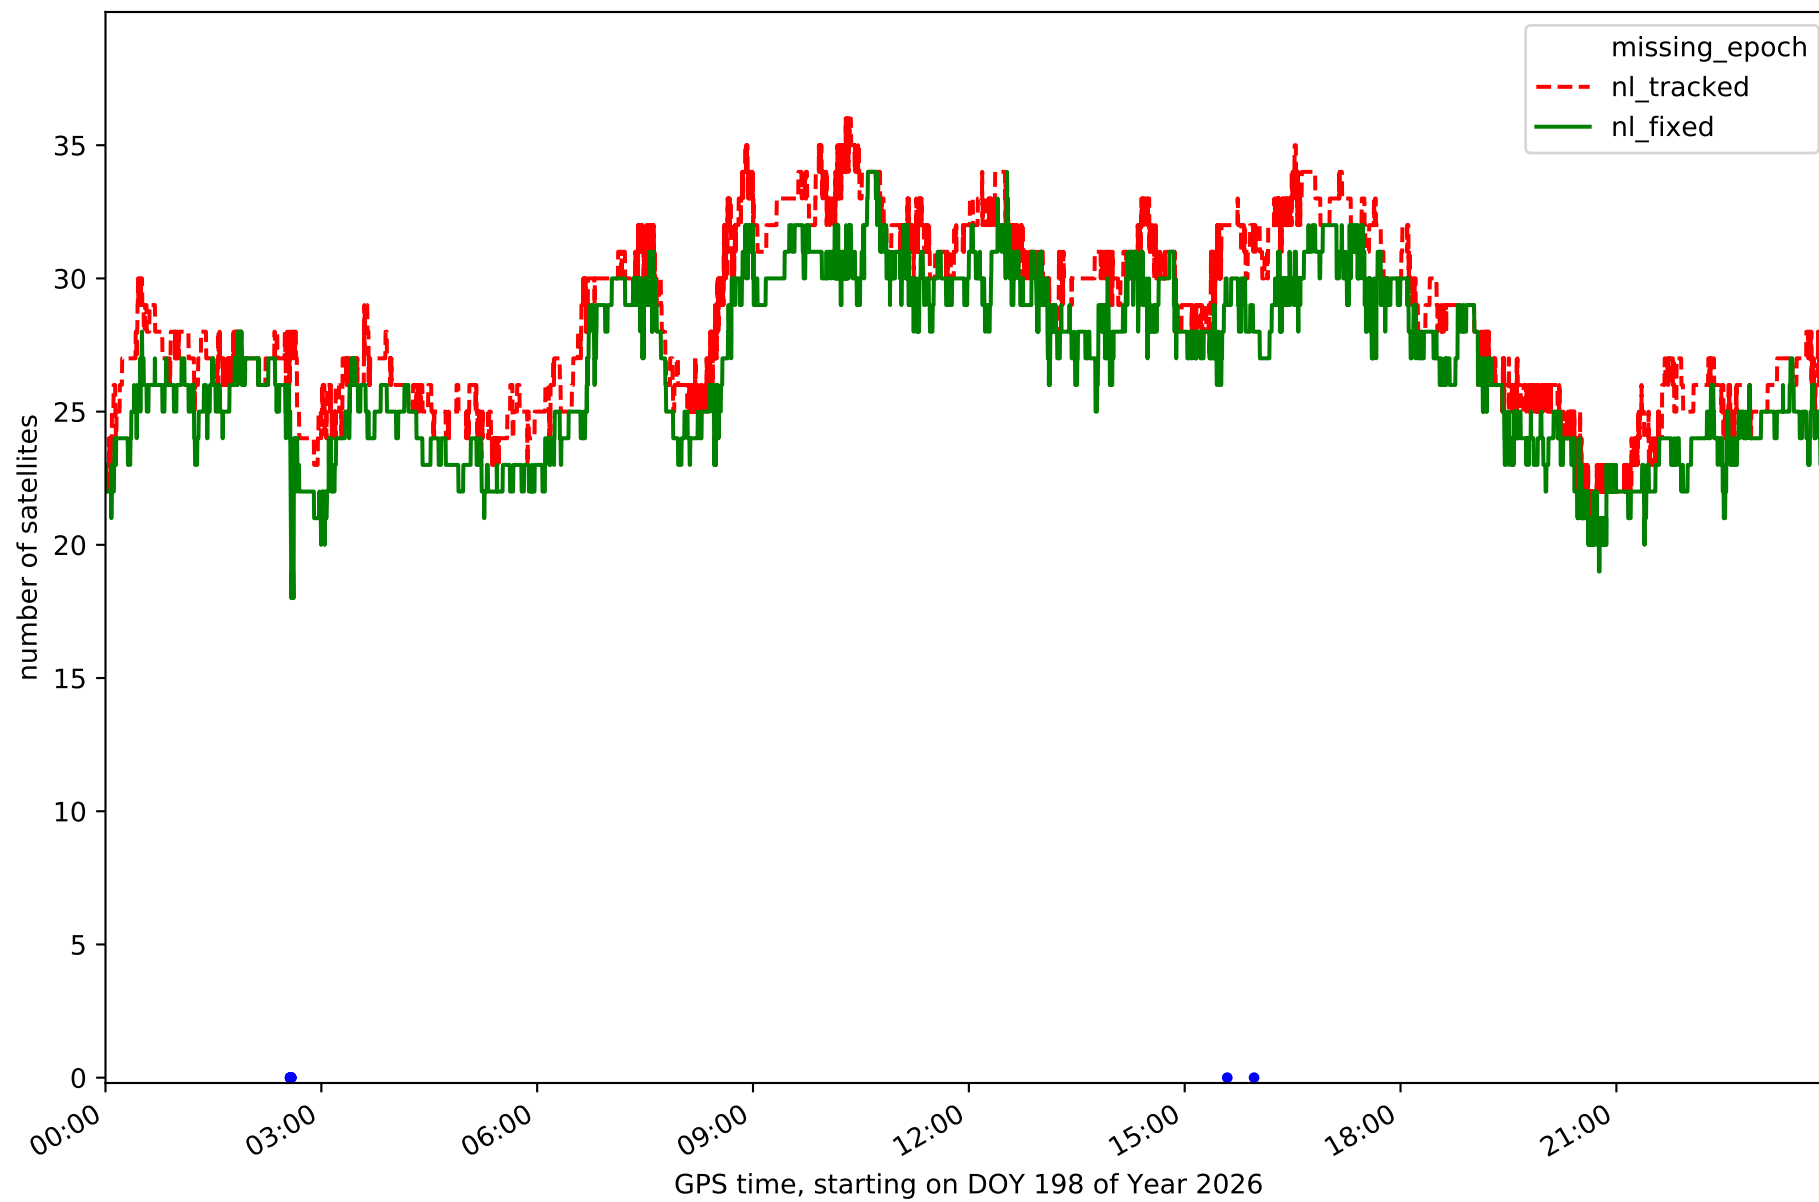


Station LP03 in network N32T

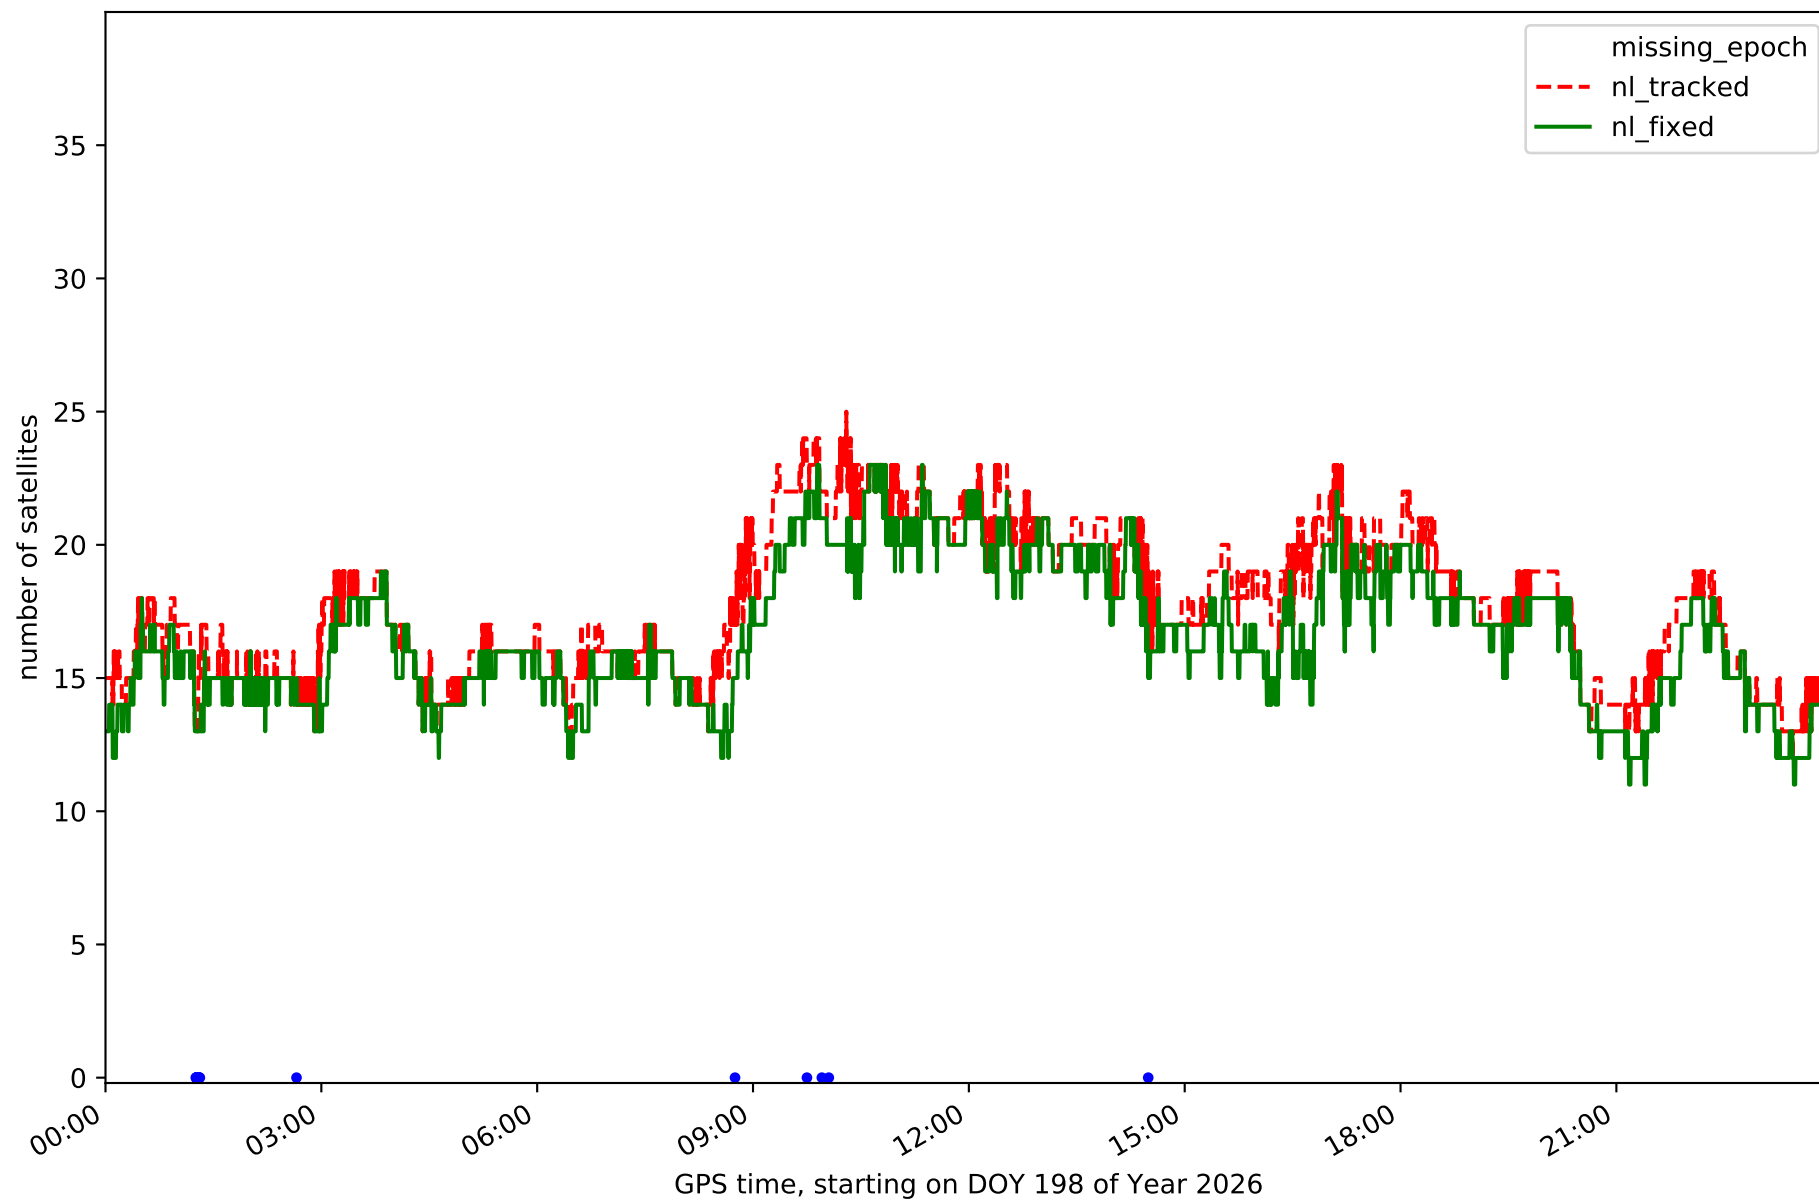


Station LPAL in network N32T

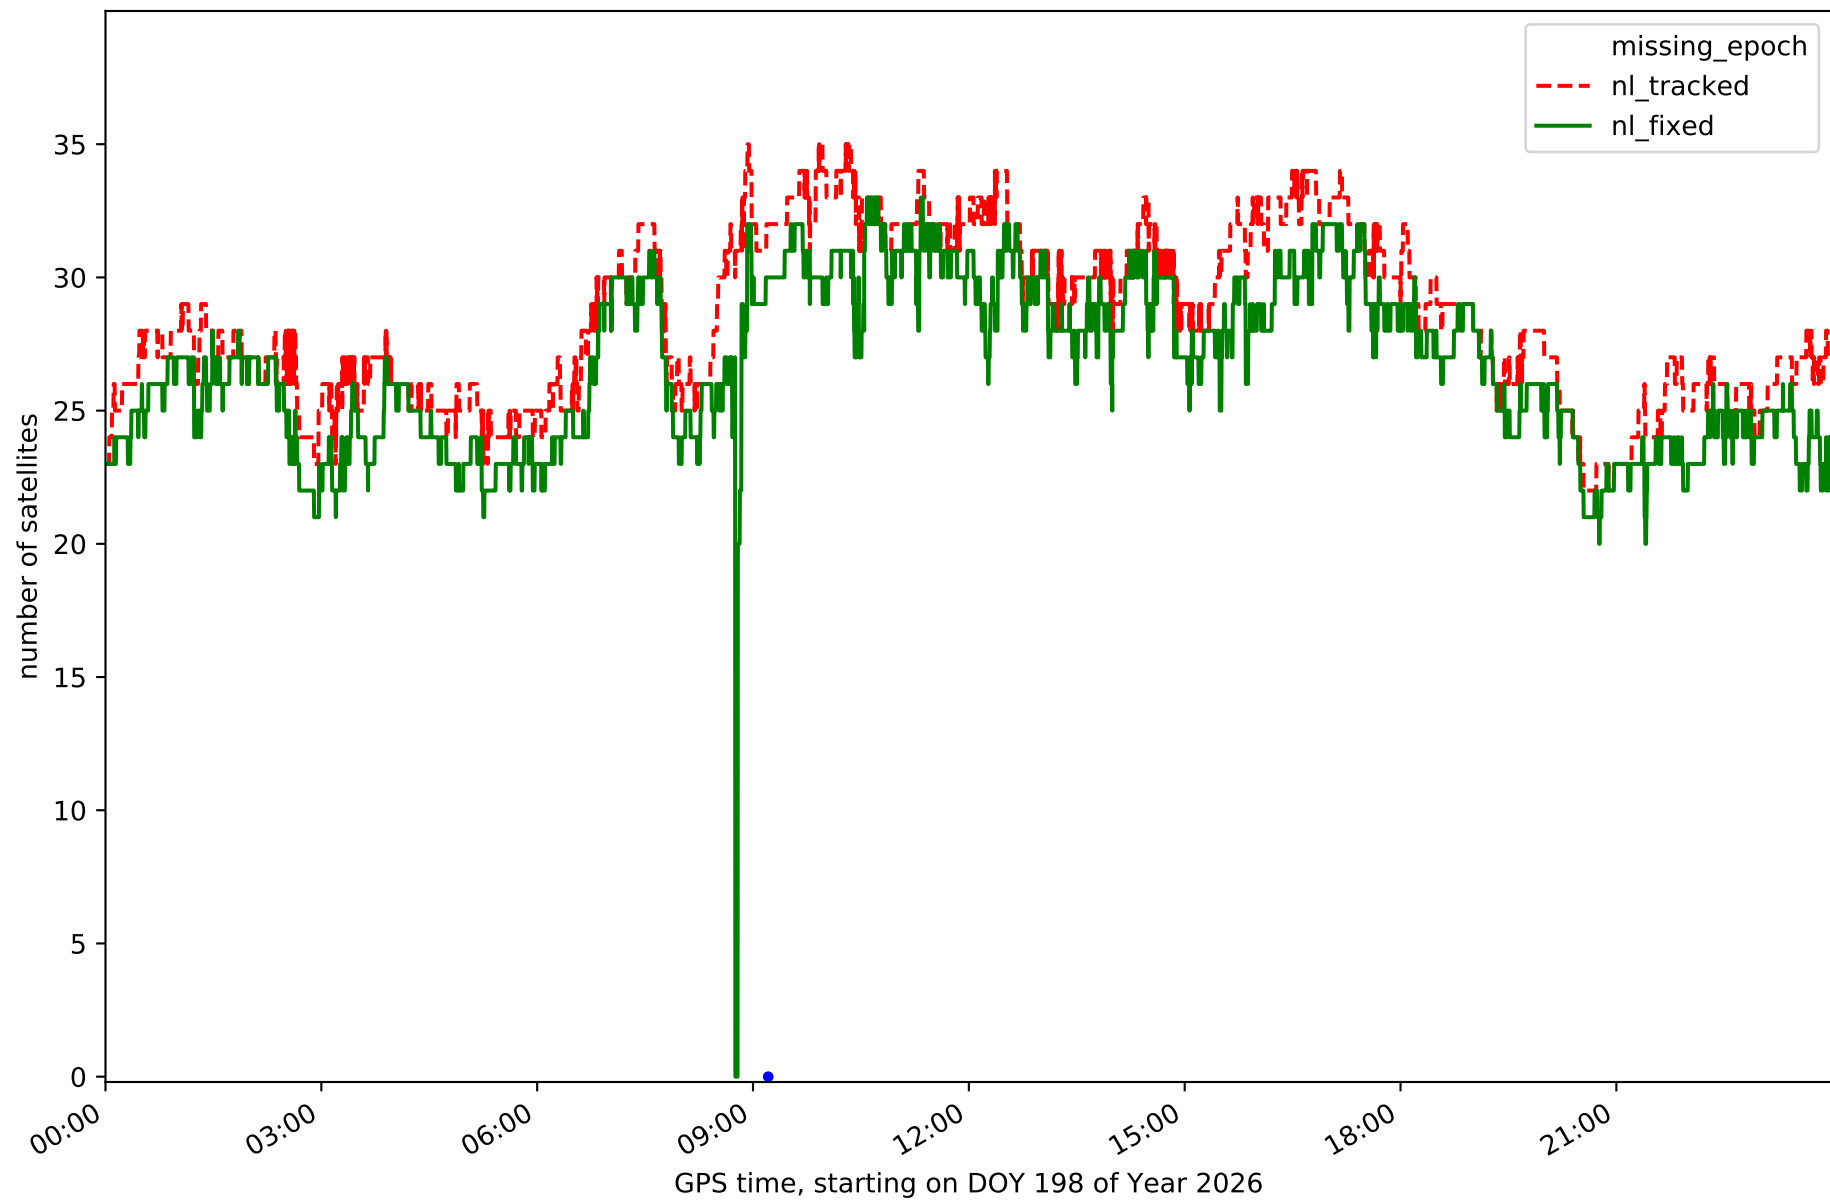


Station LRES in network N32T

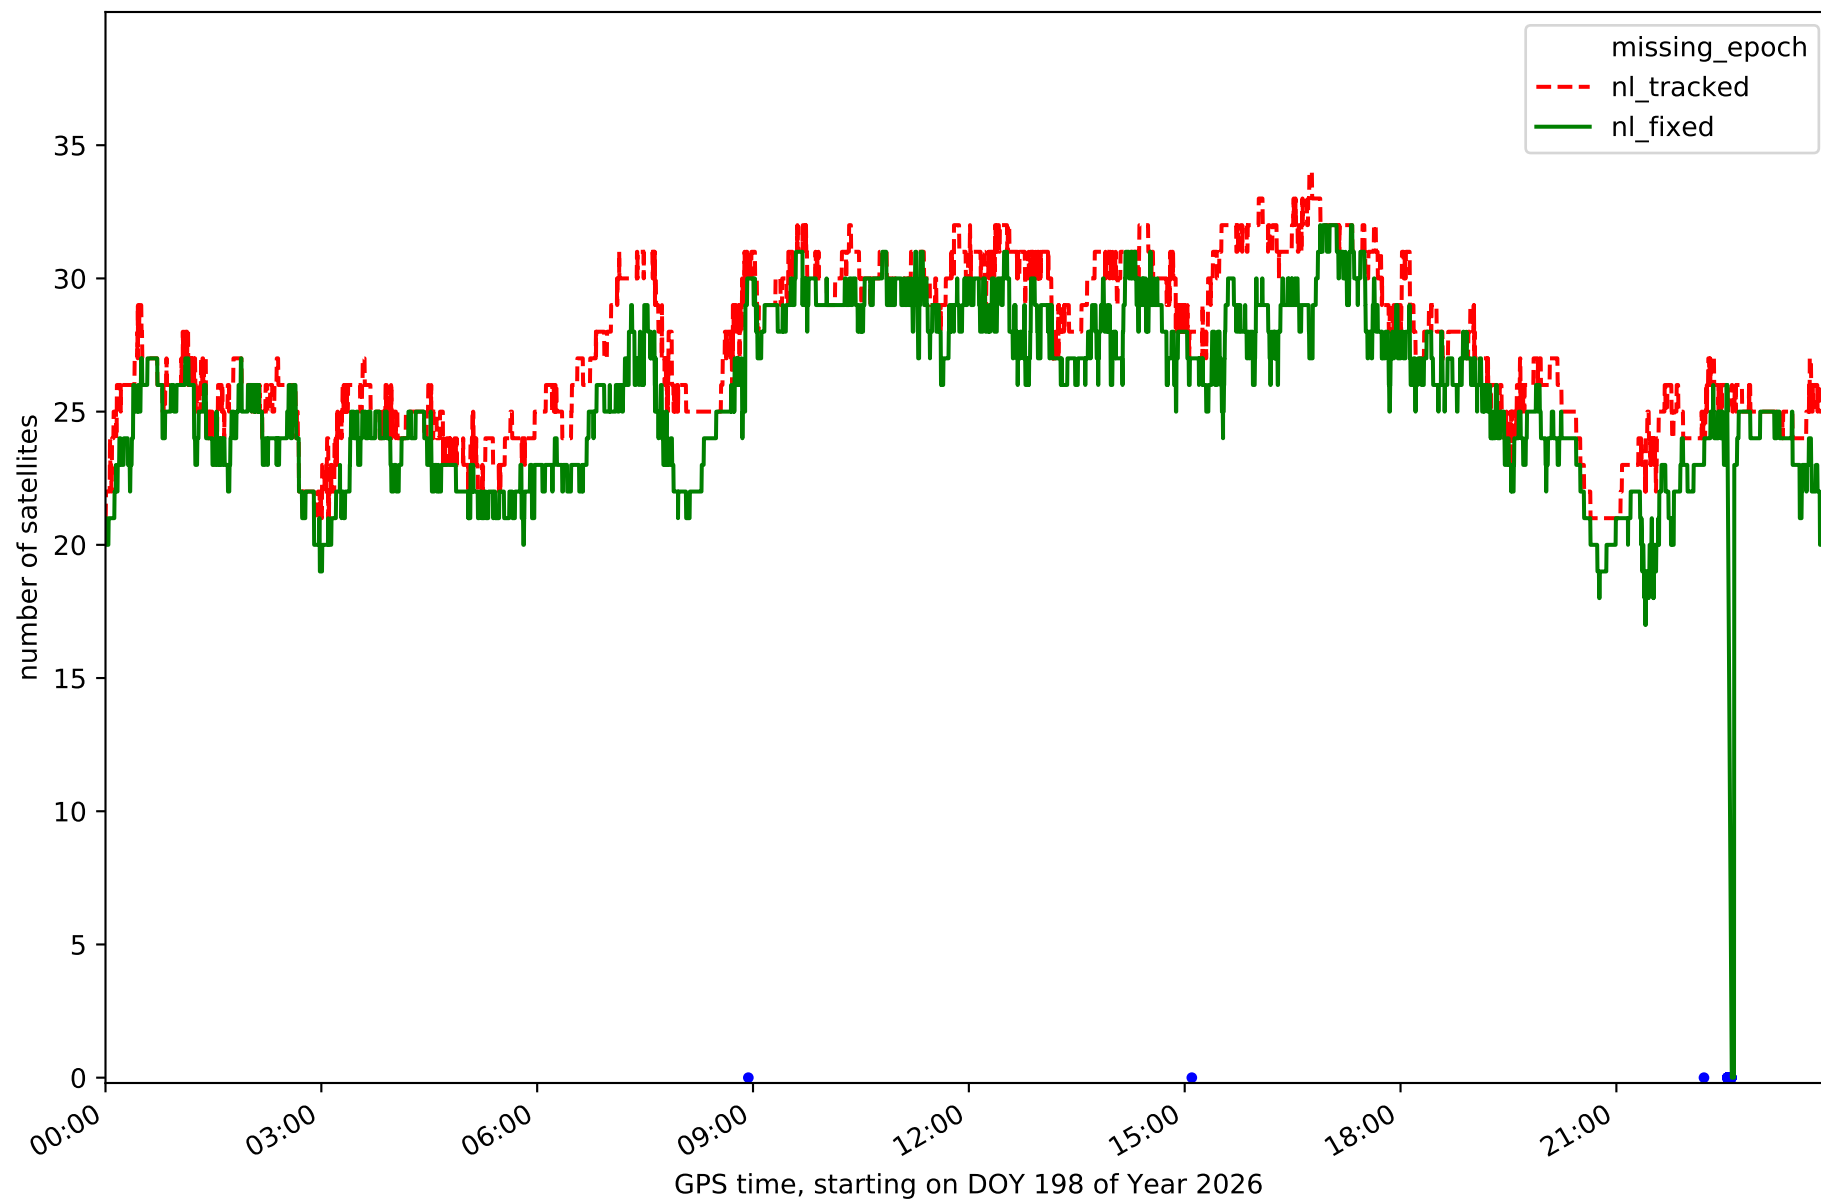


Station TN01 in network N32T

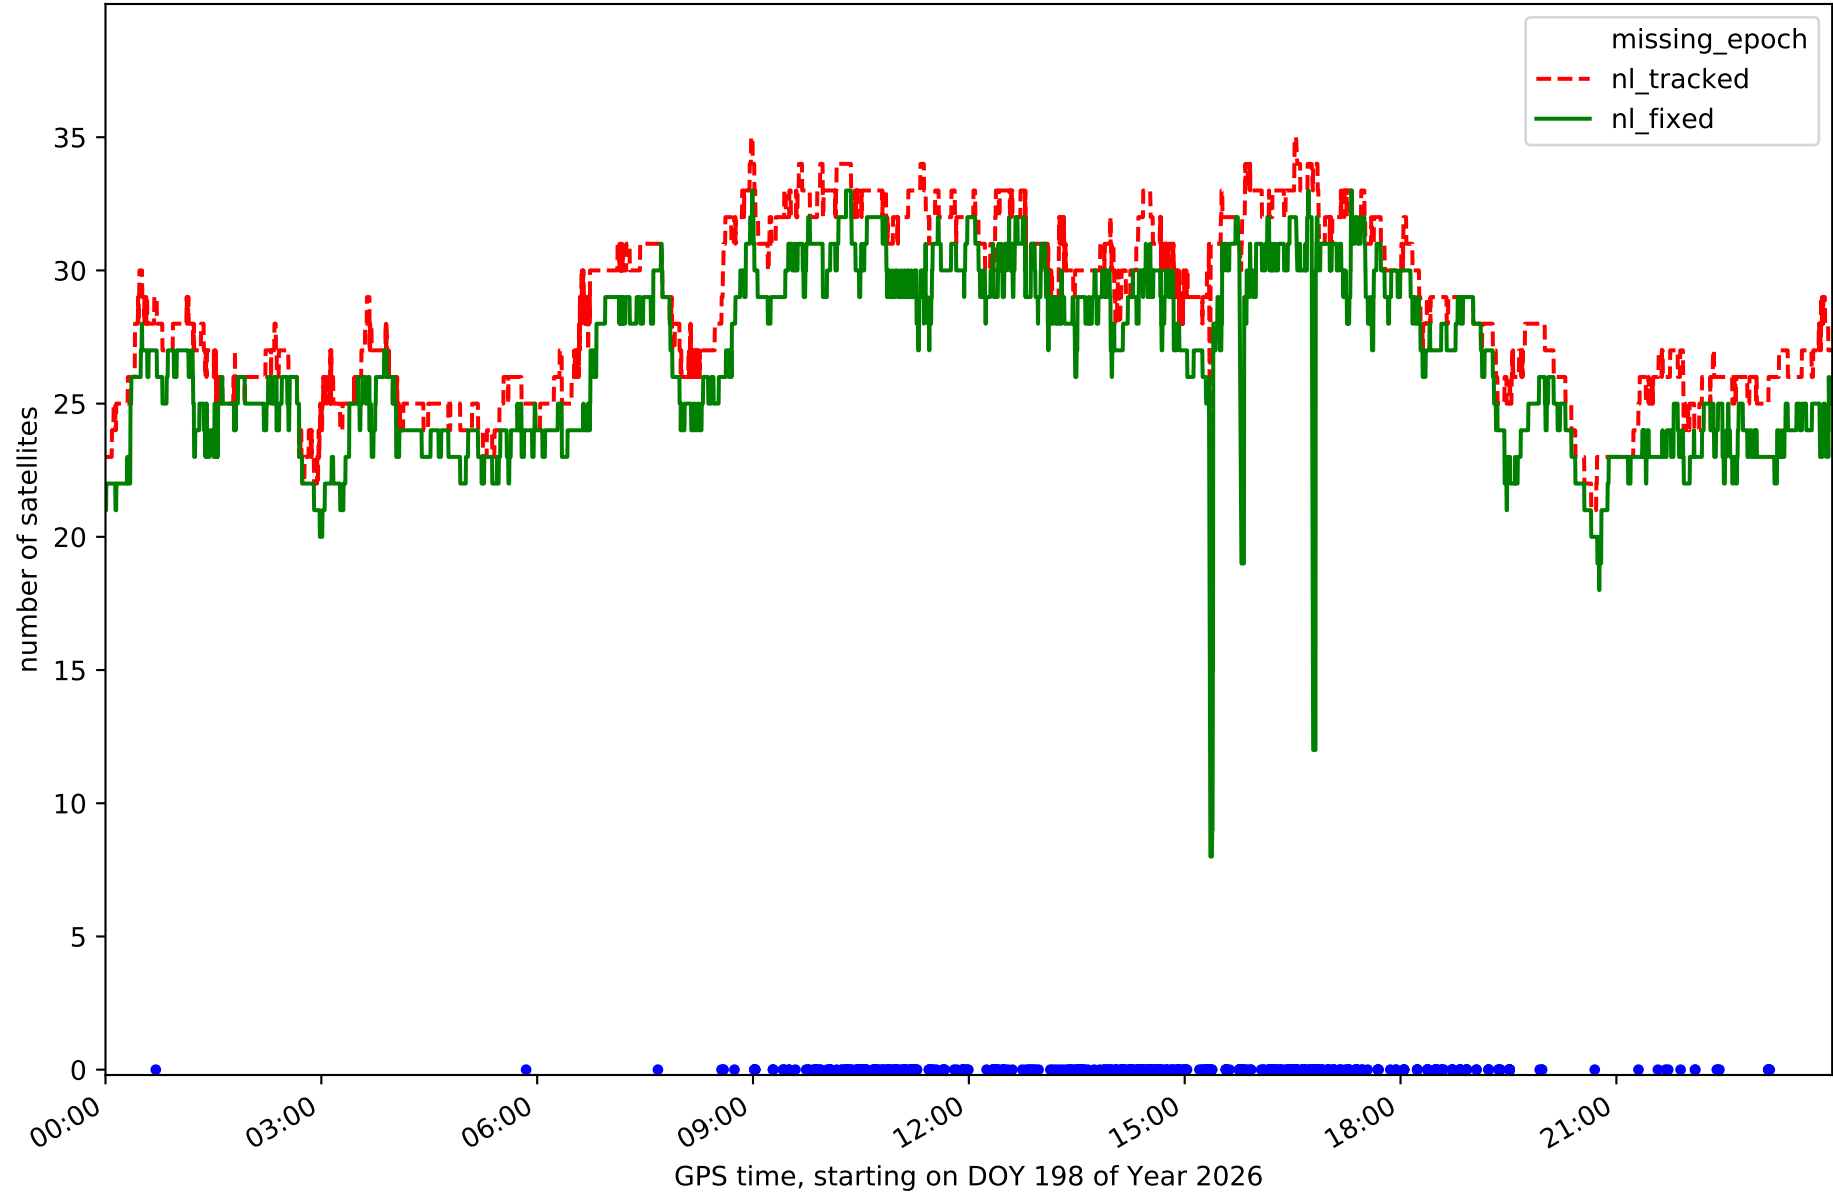


Station TN02 in network N32T

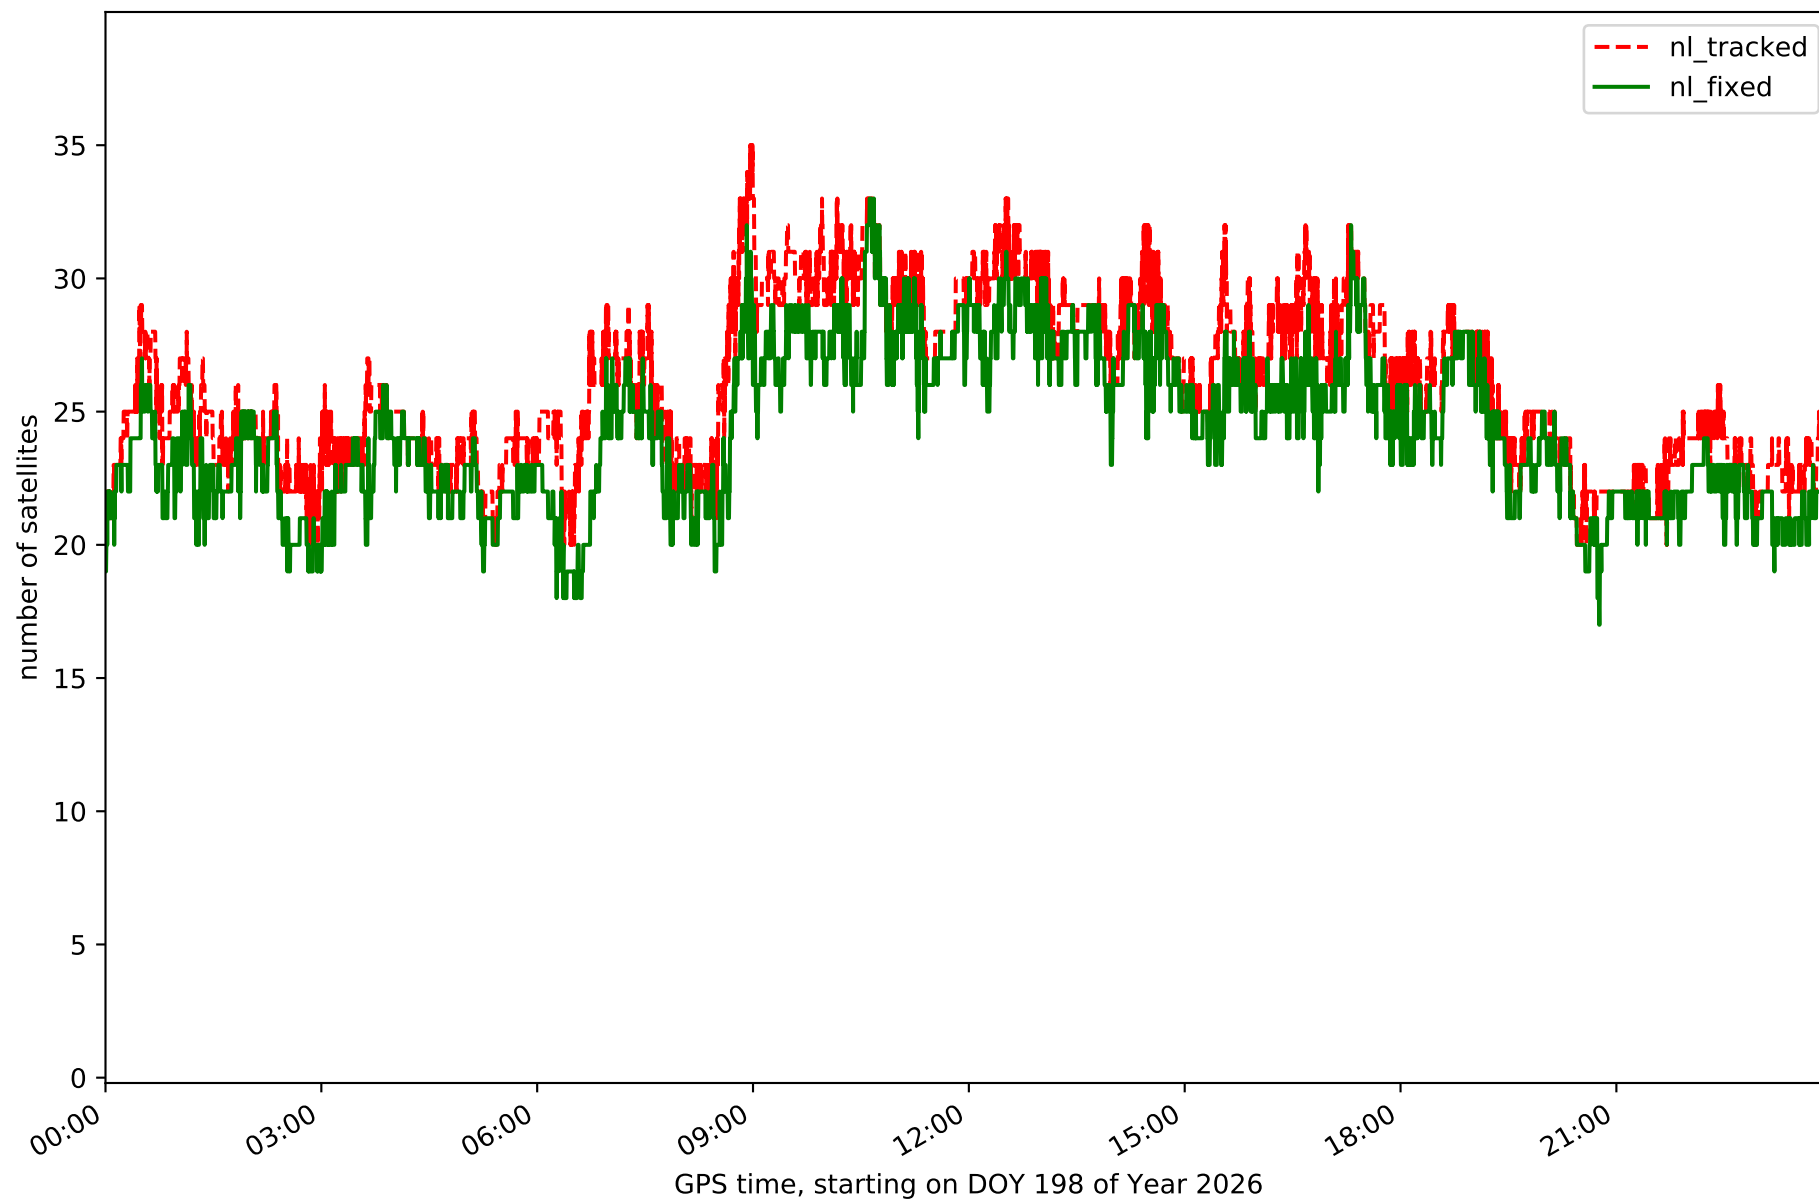


Station TN03 in network N32T

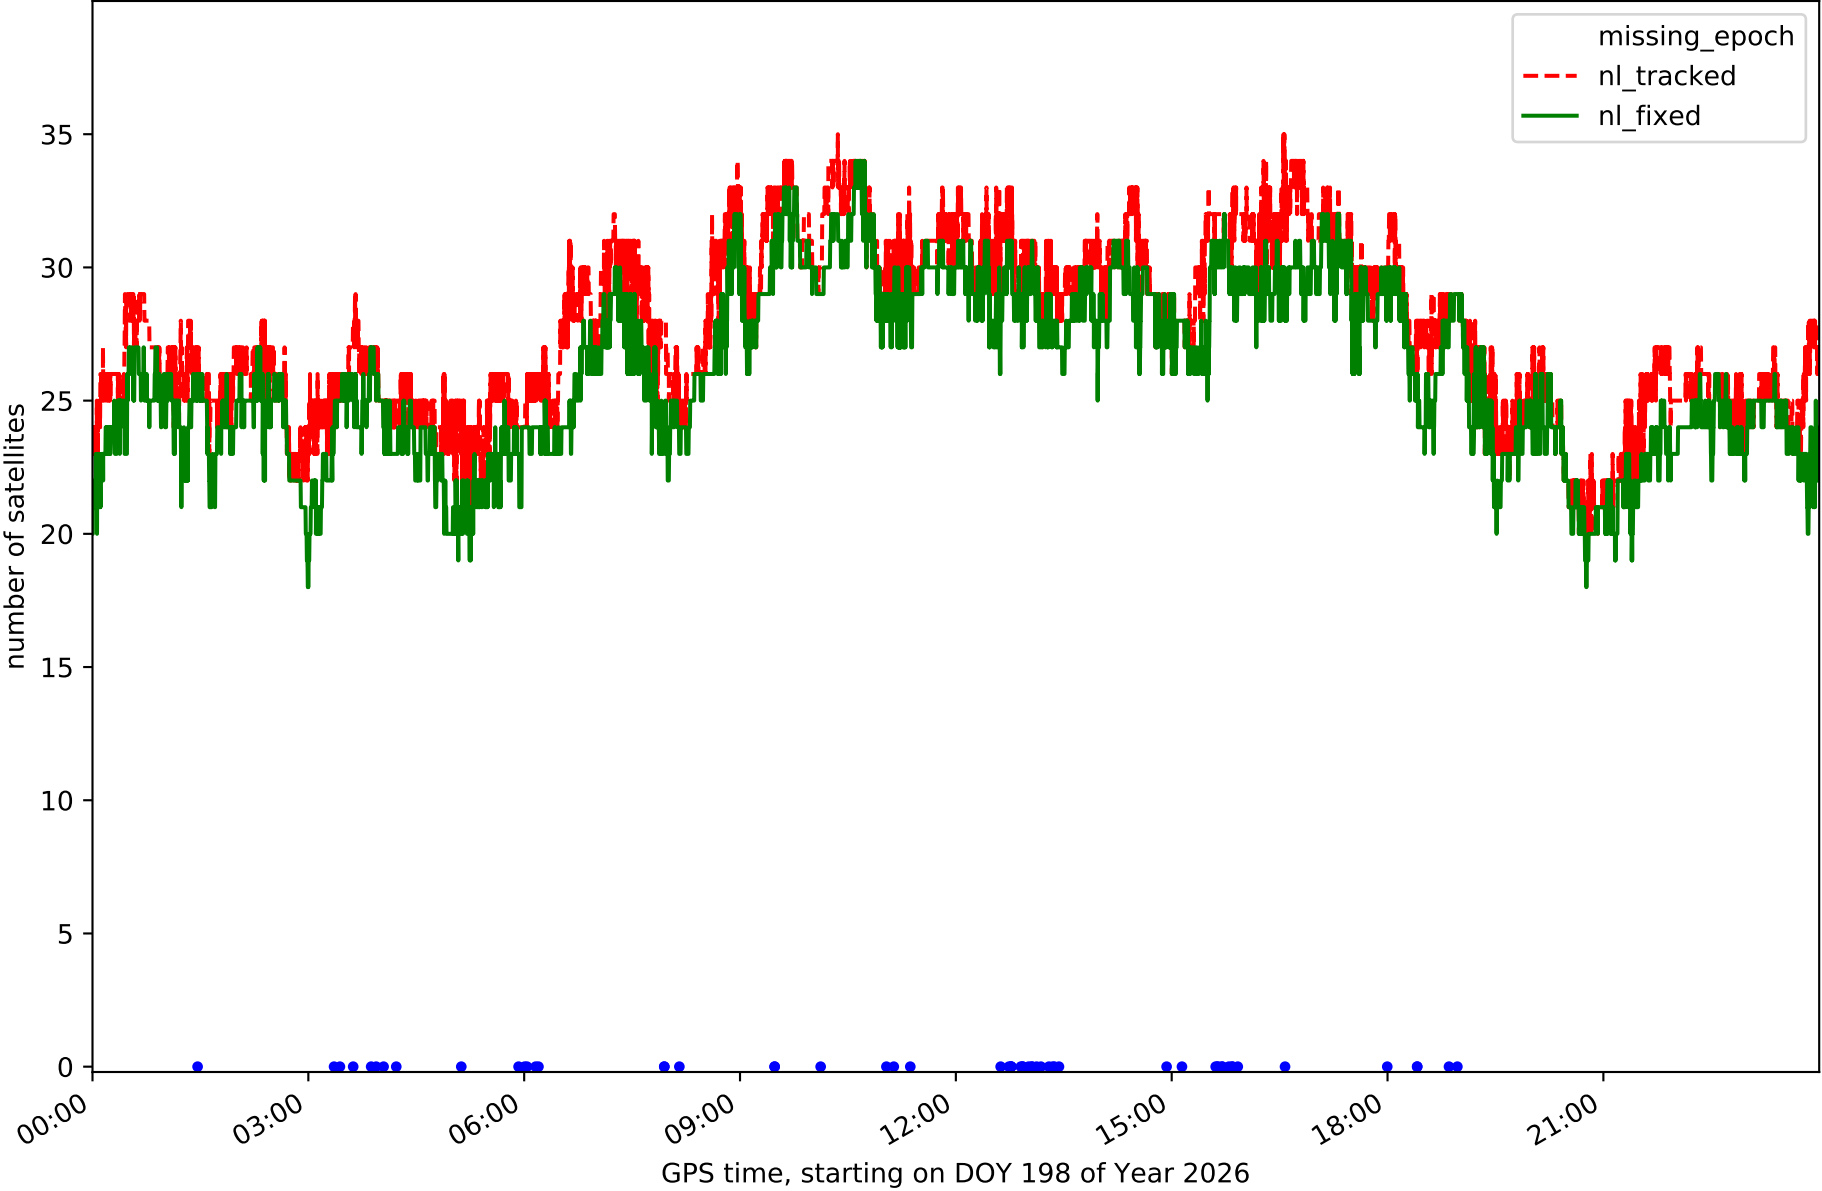


Station TN06 in network N32T

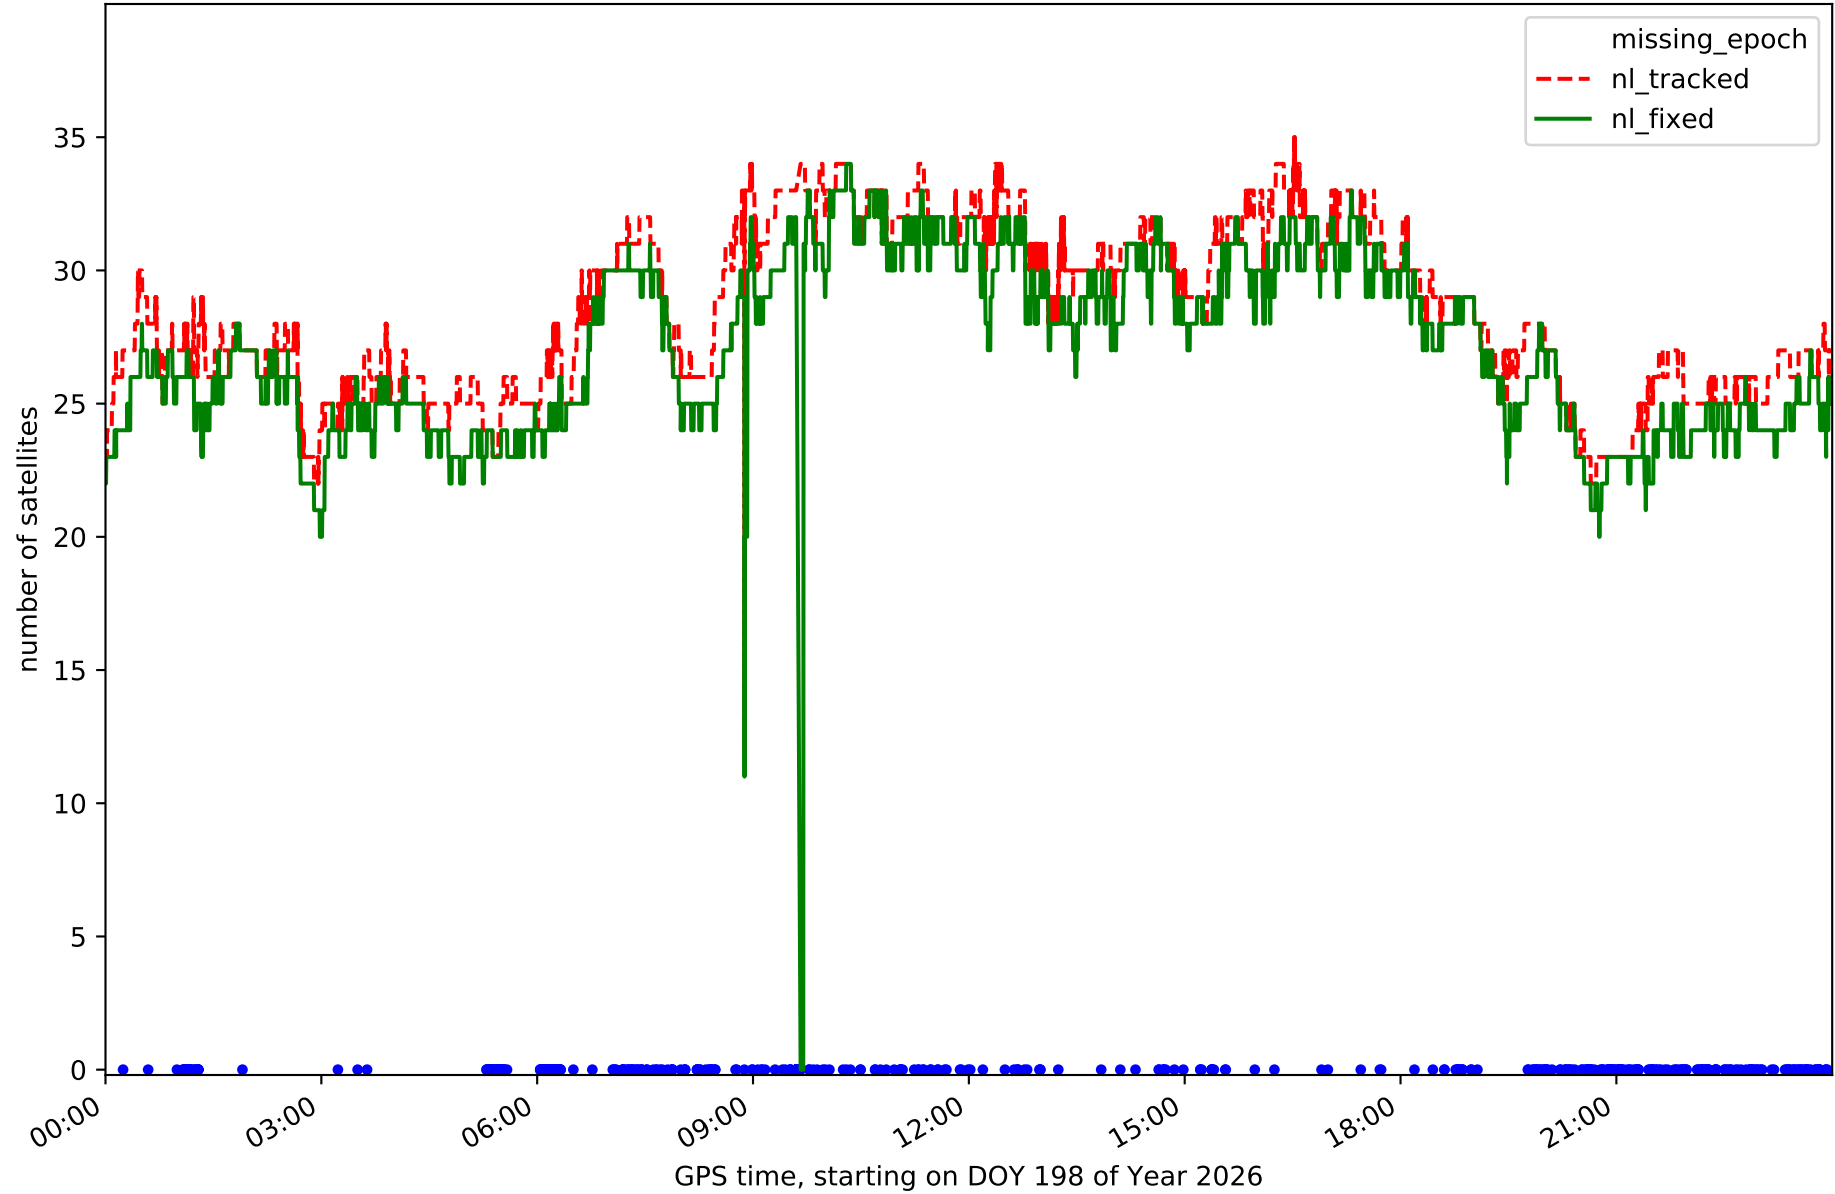


Station TN09 in network N32T

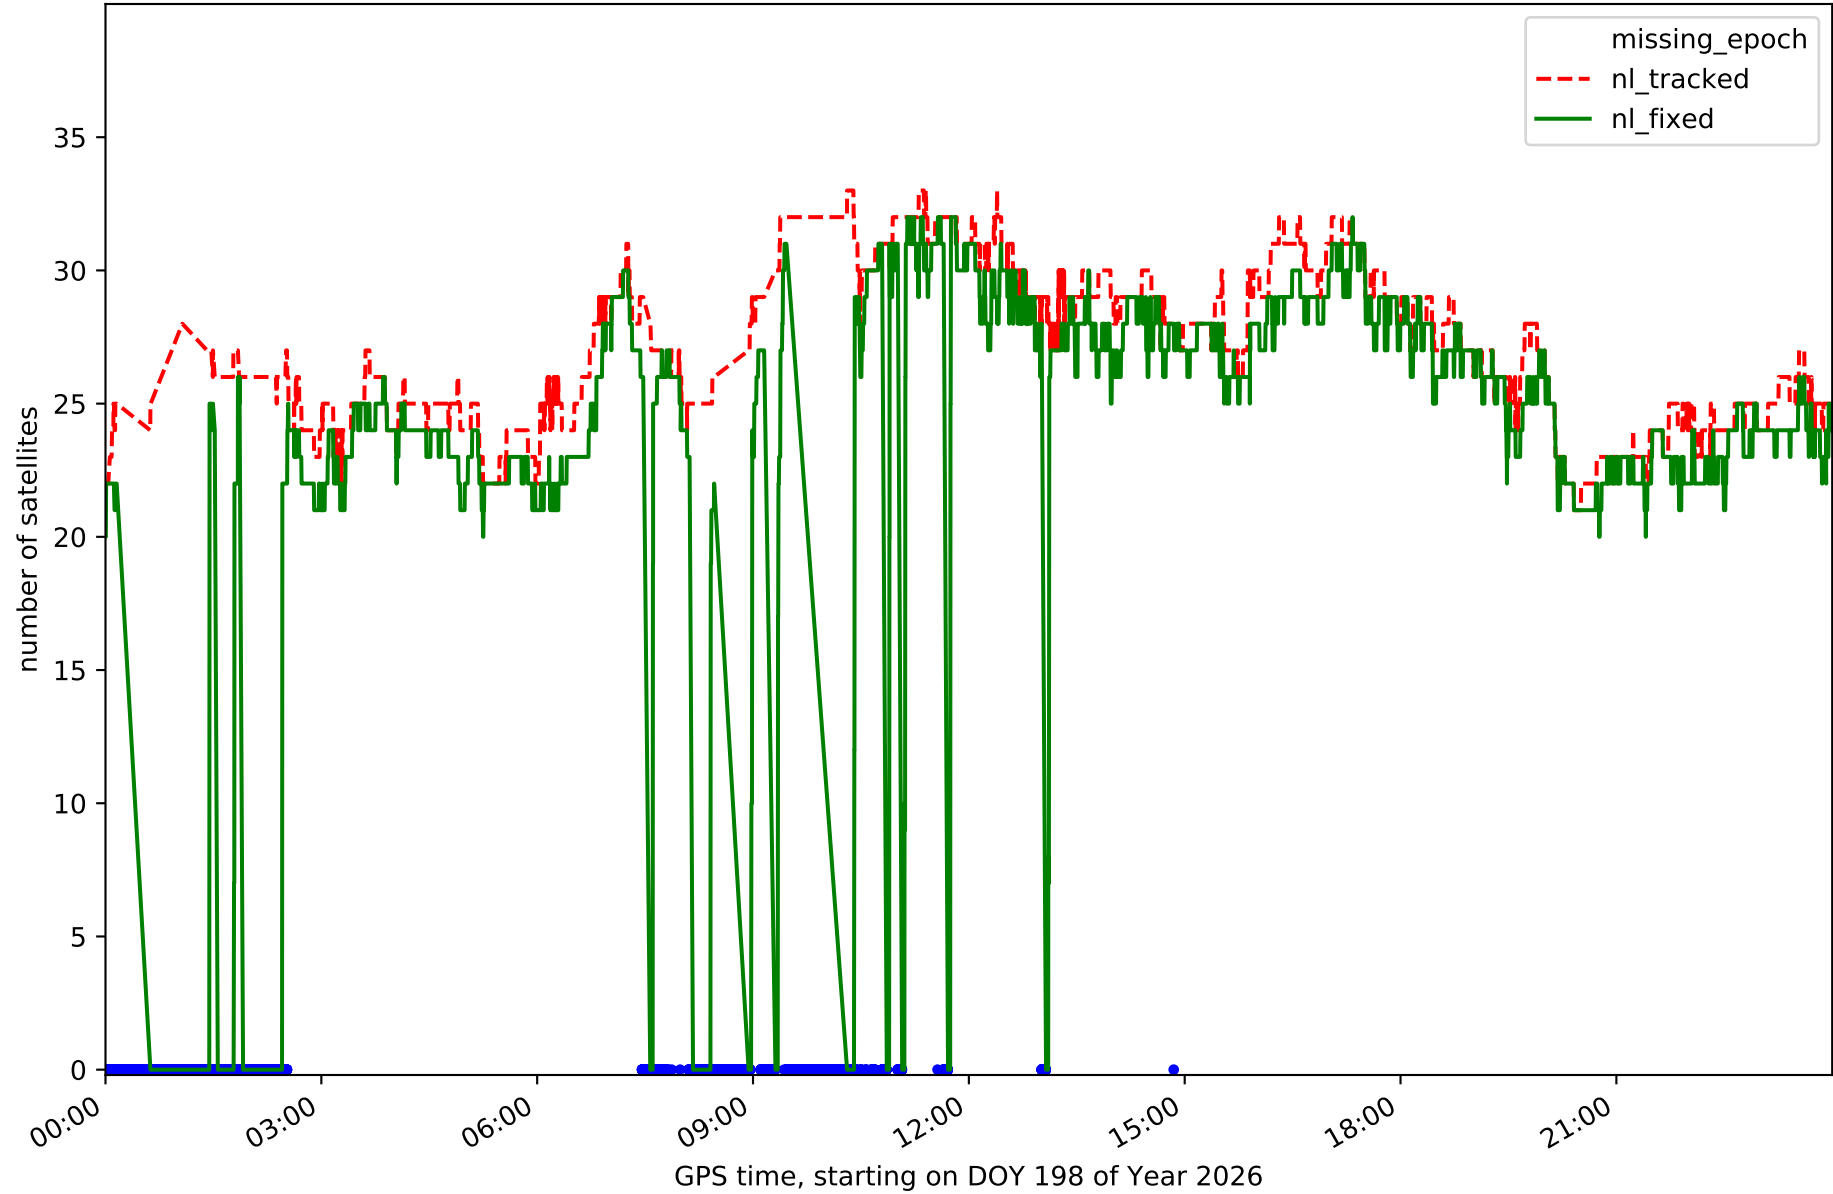


Station TE11 in network N32T

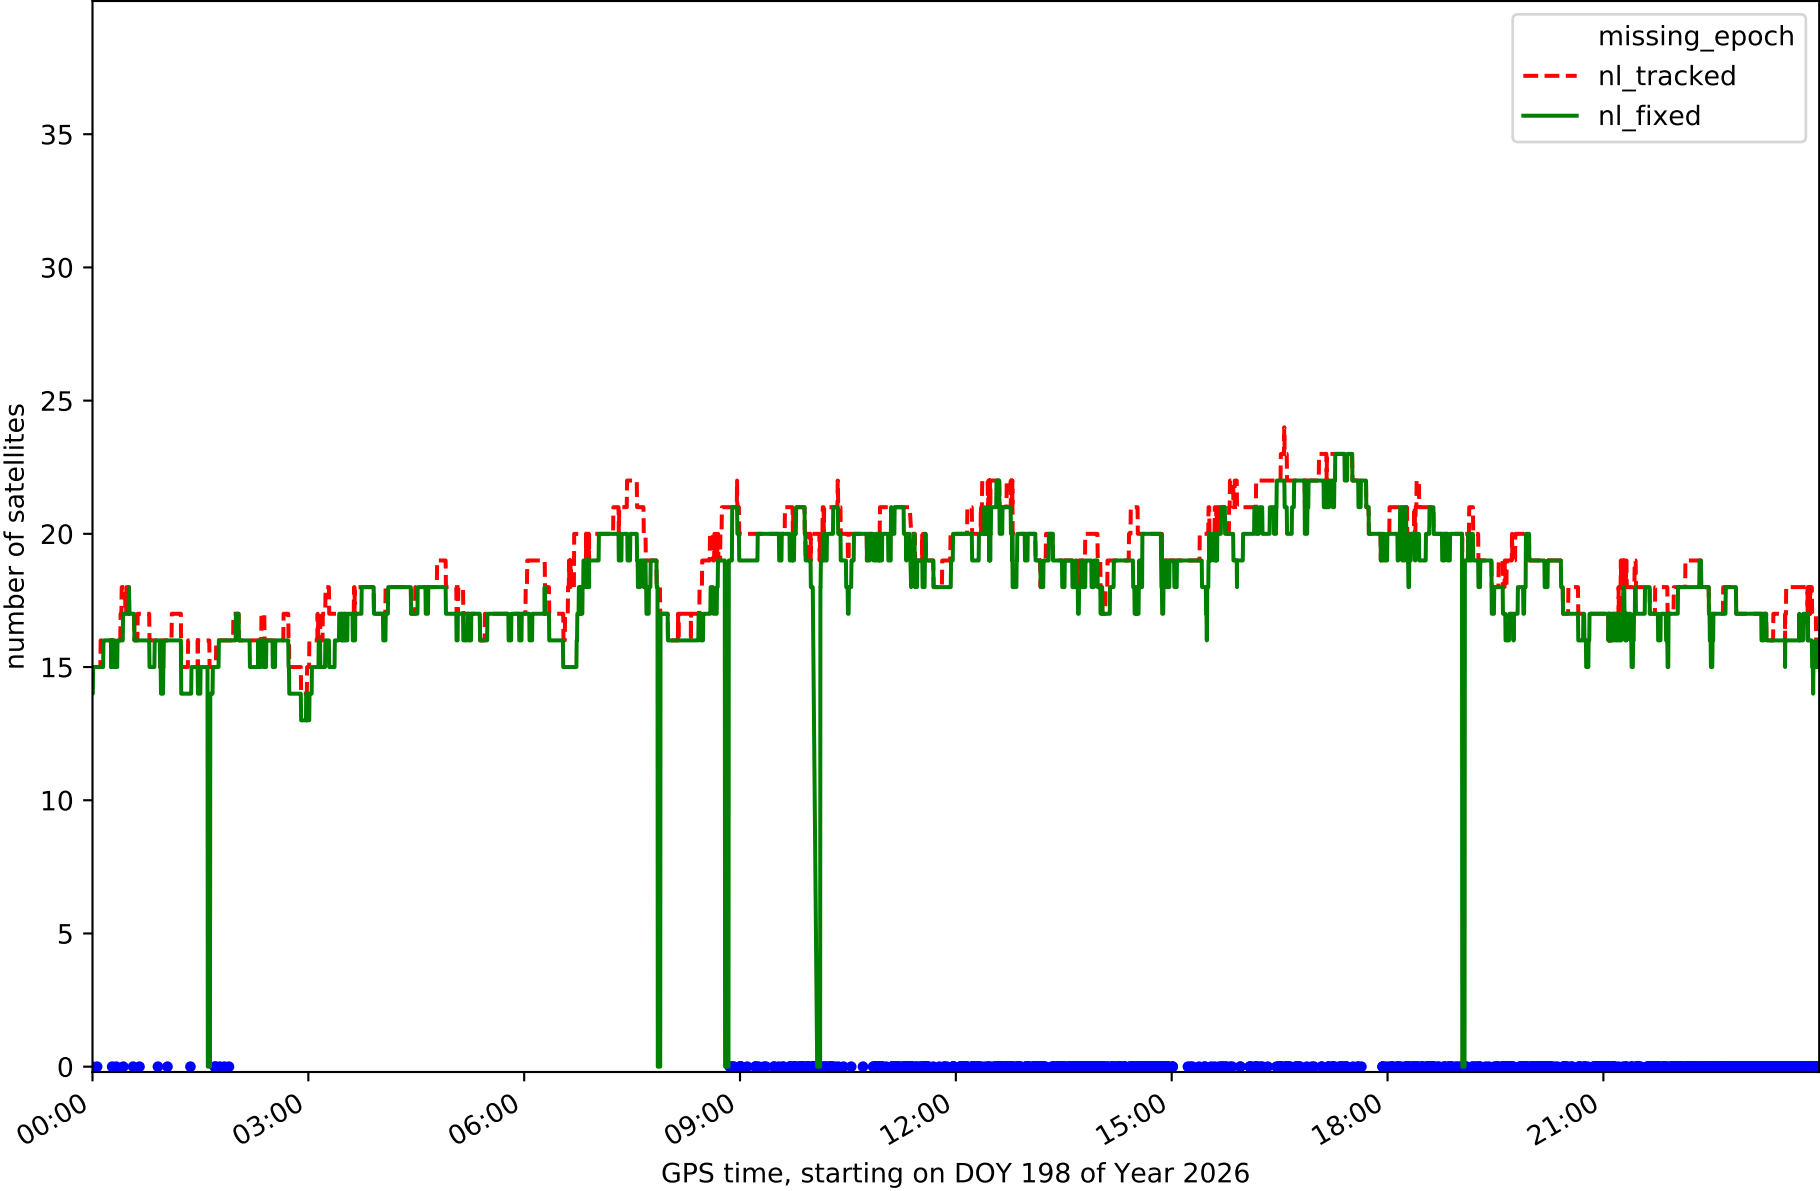


RefCheck for station EH01 in network N32T

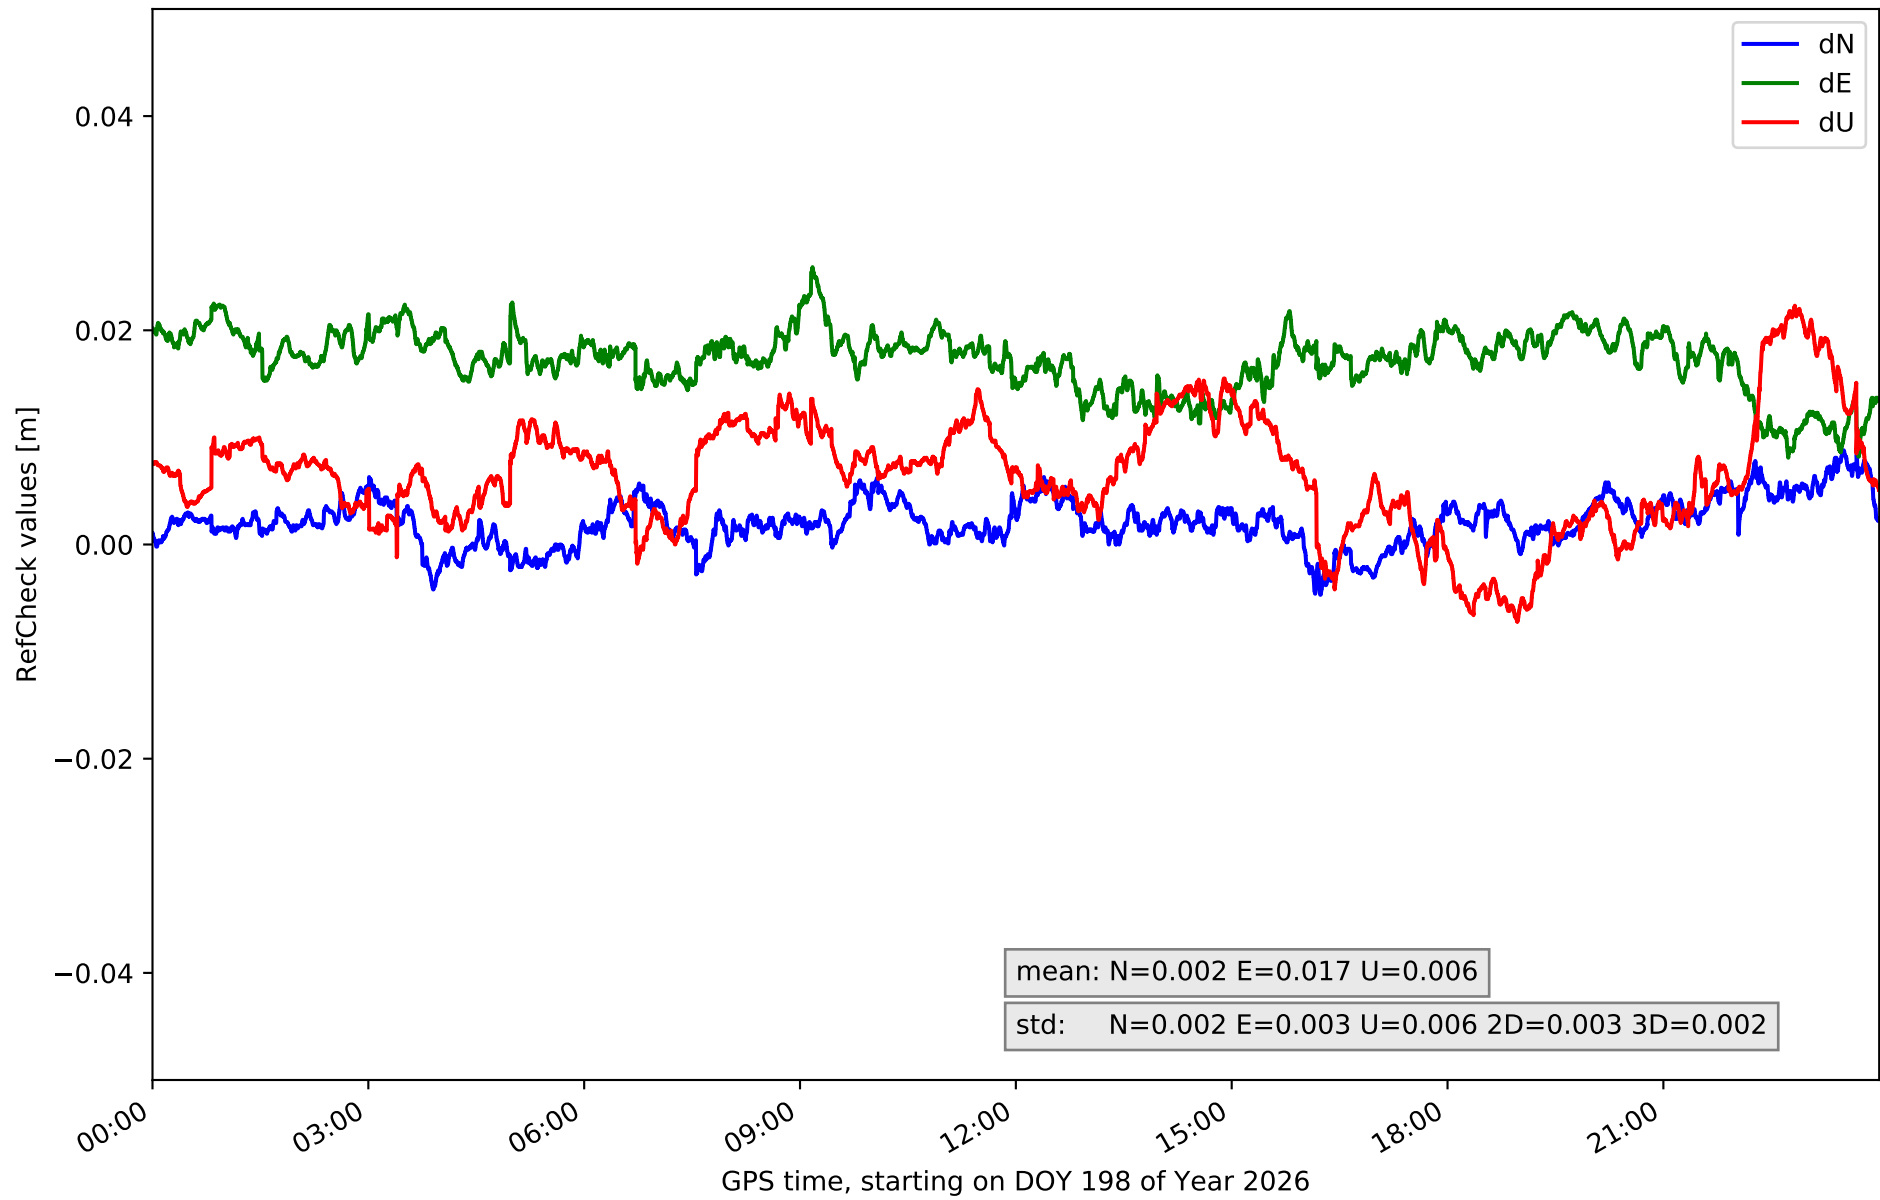


RefCheck for station EH02 in network N32T

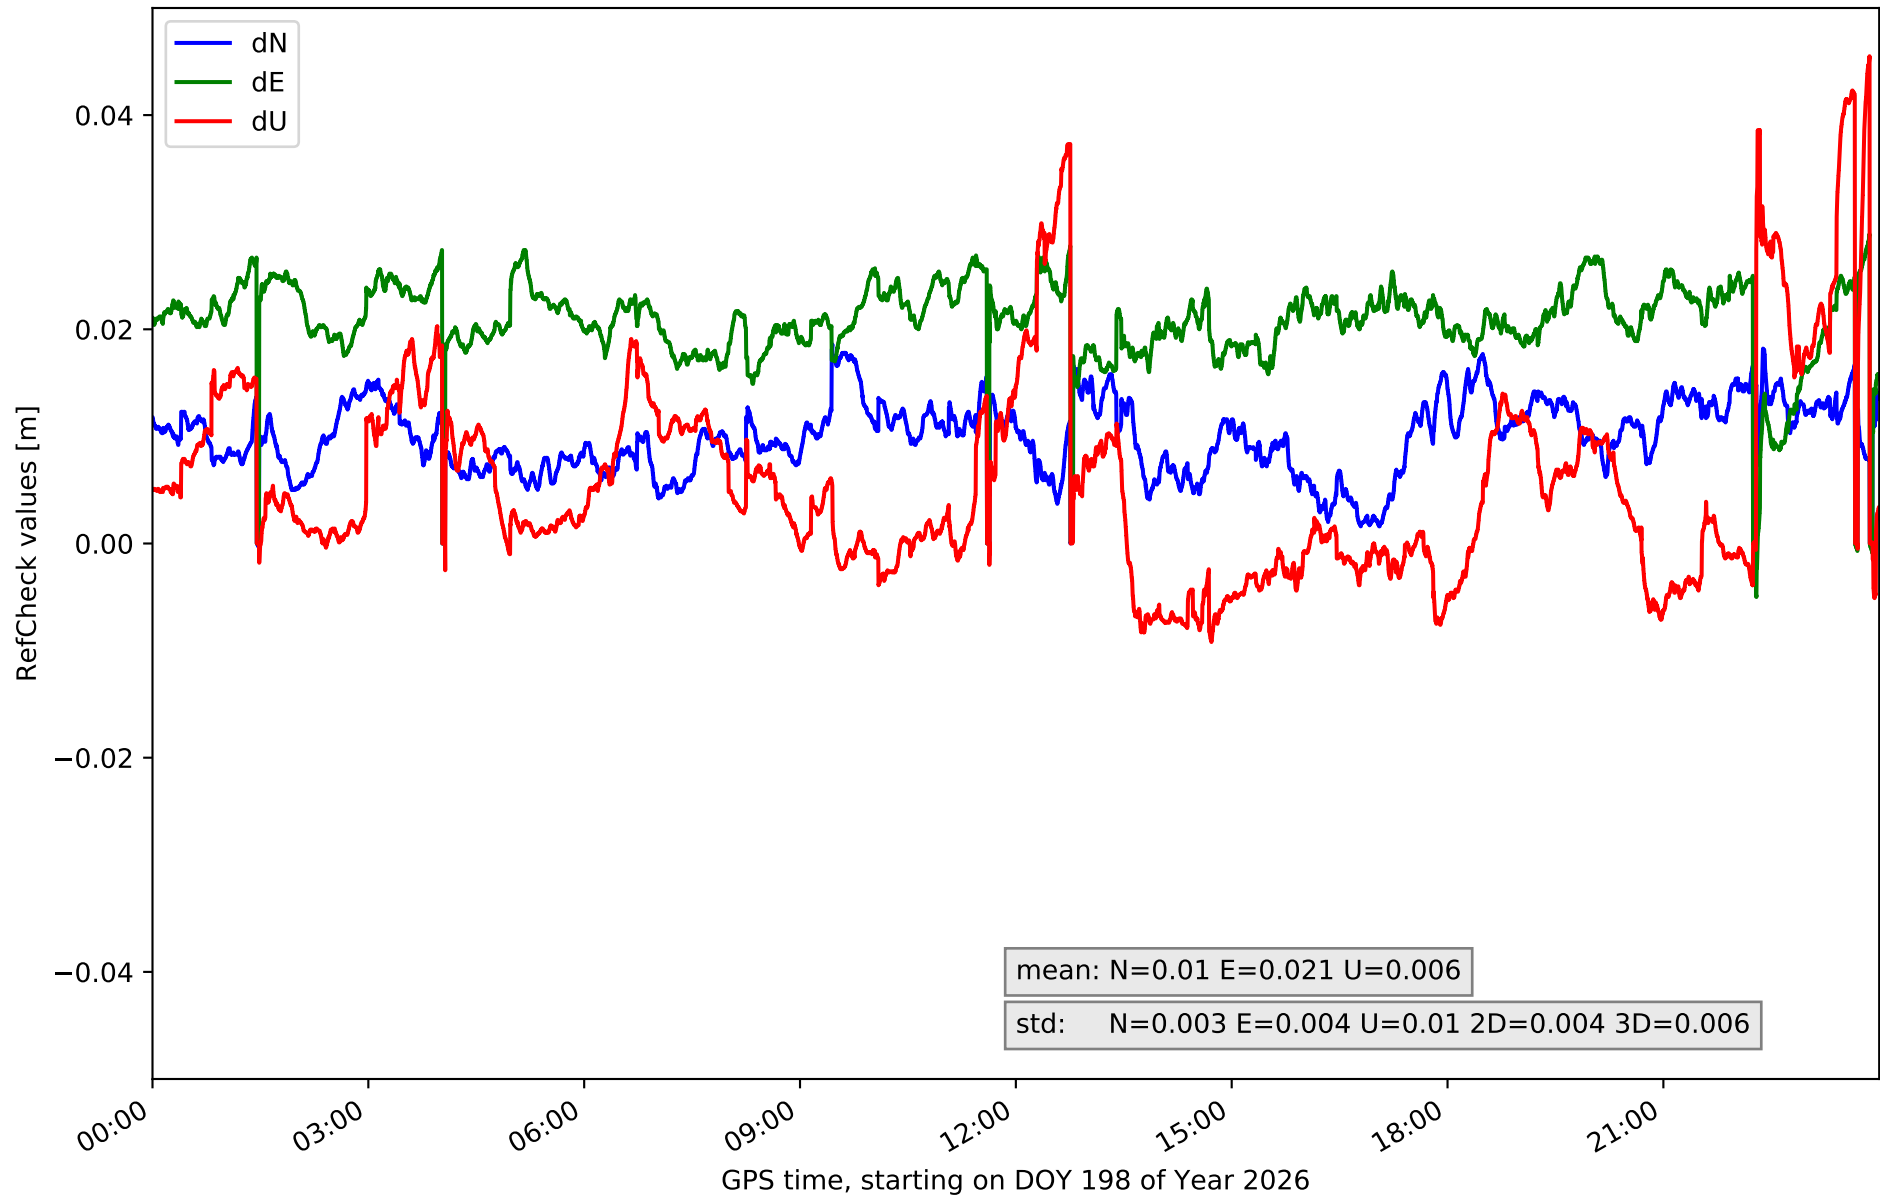


RefCheck for station GOM1 in network N32T

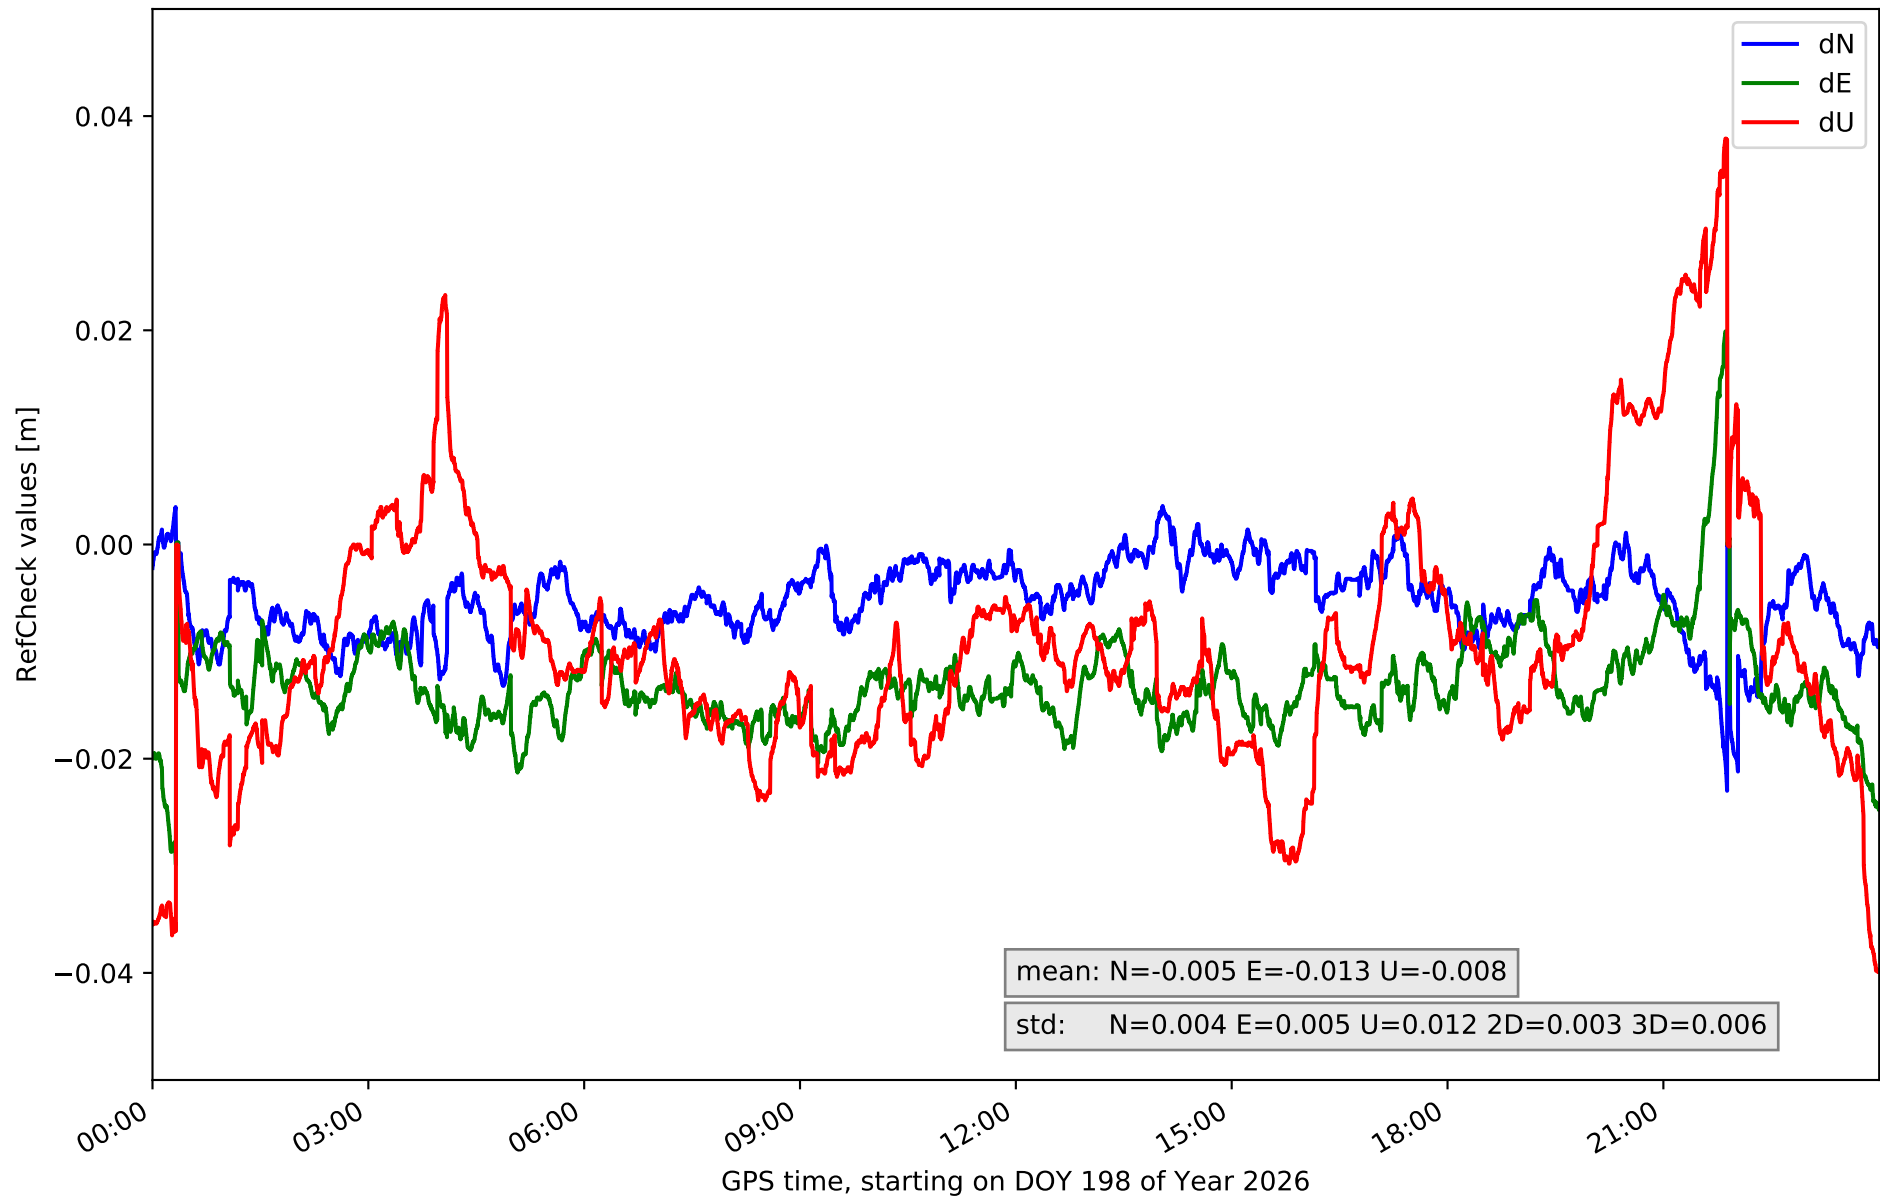


RefCheck for station GOME in network N32T

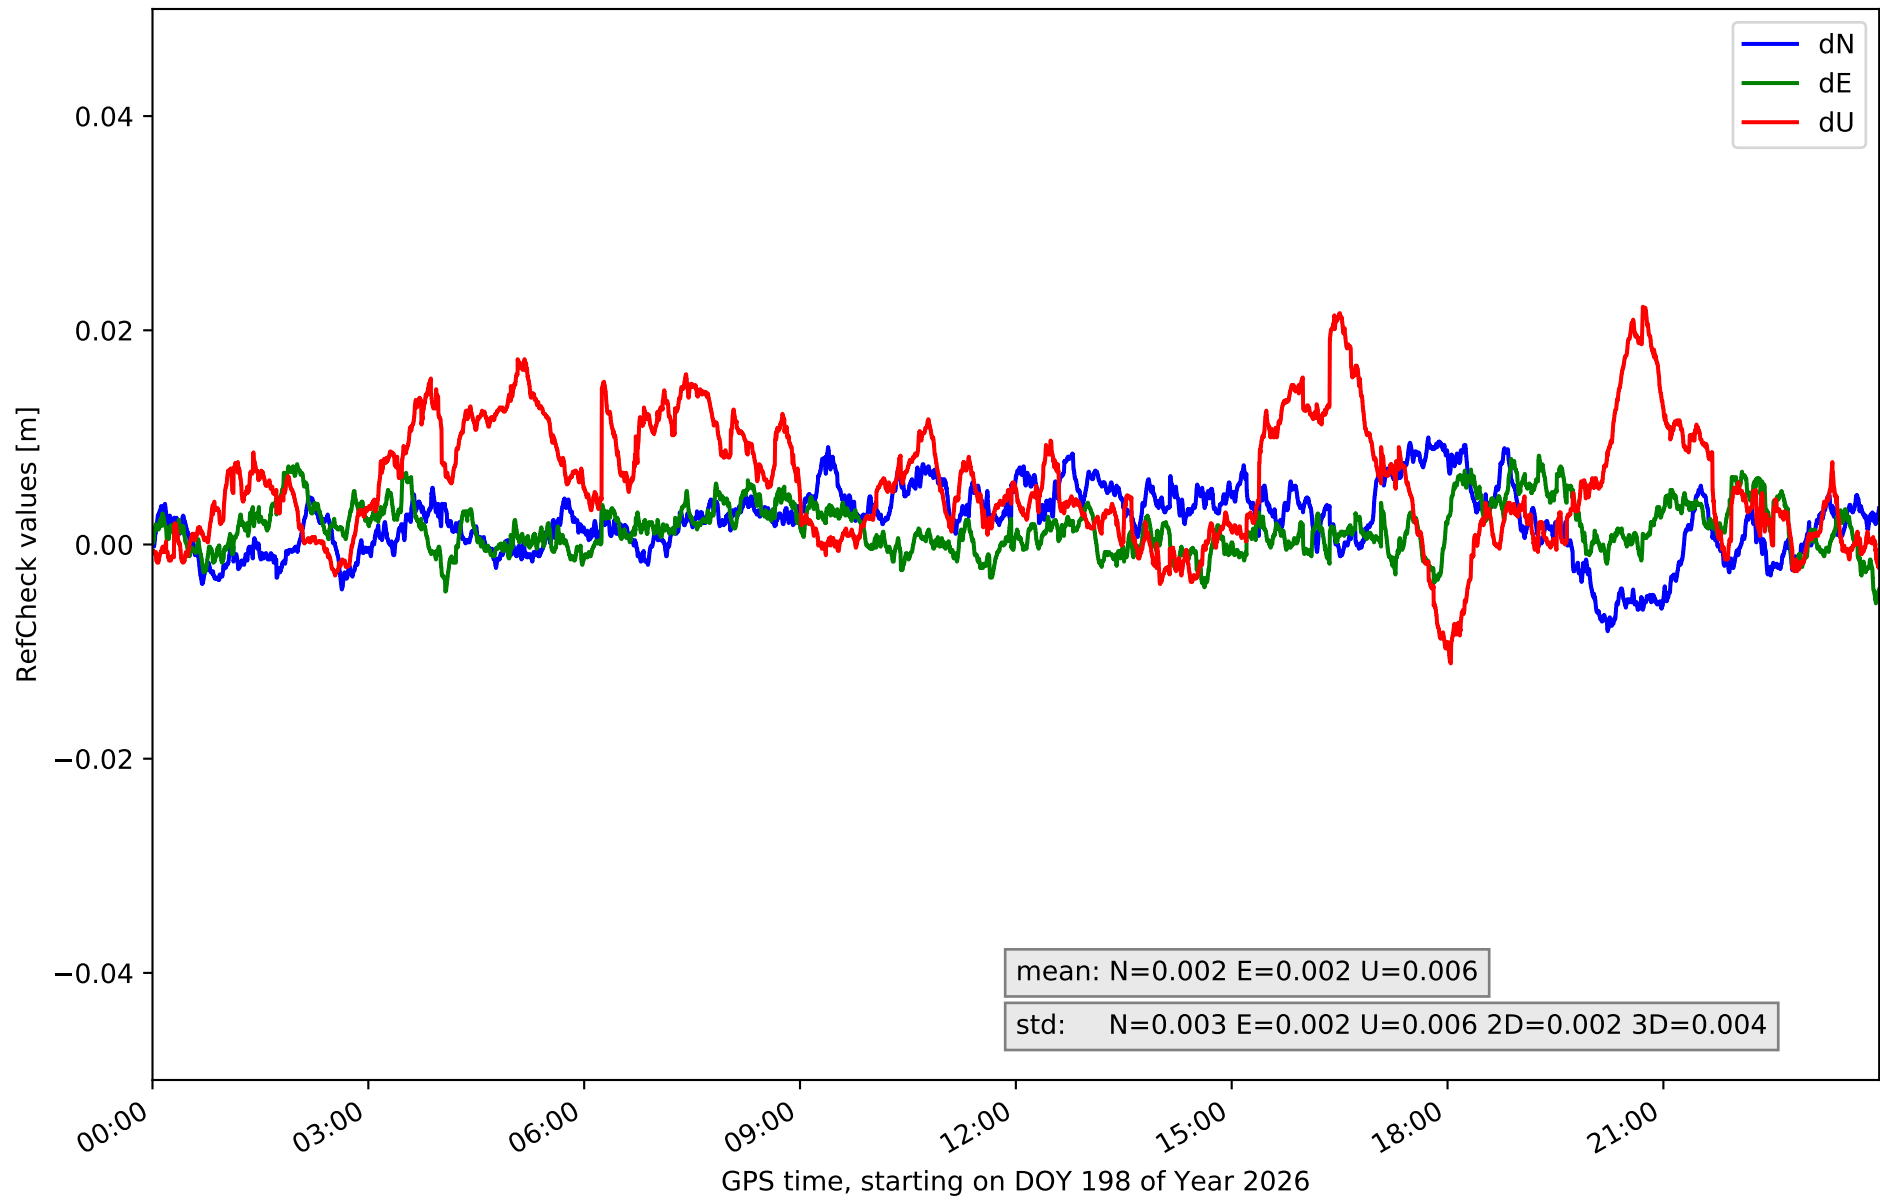


RefCheck for station IZAN in network N32T

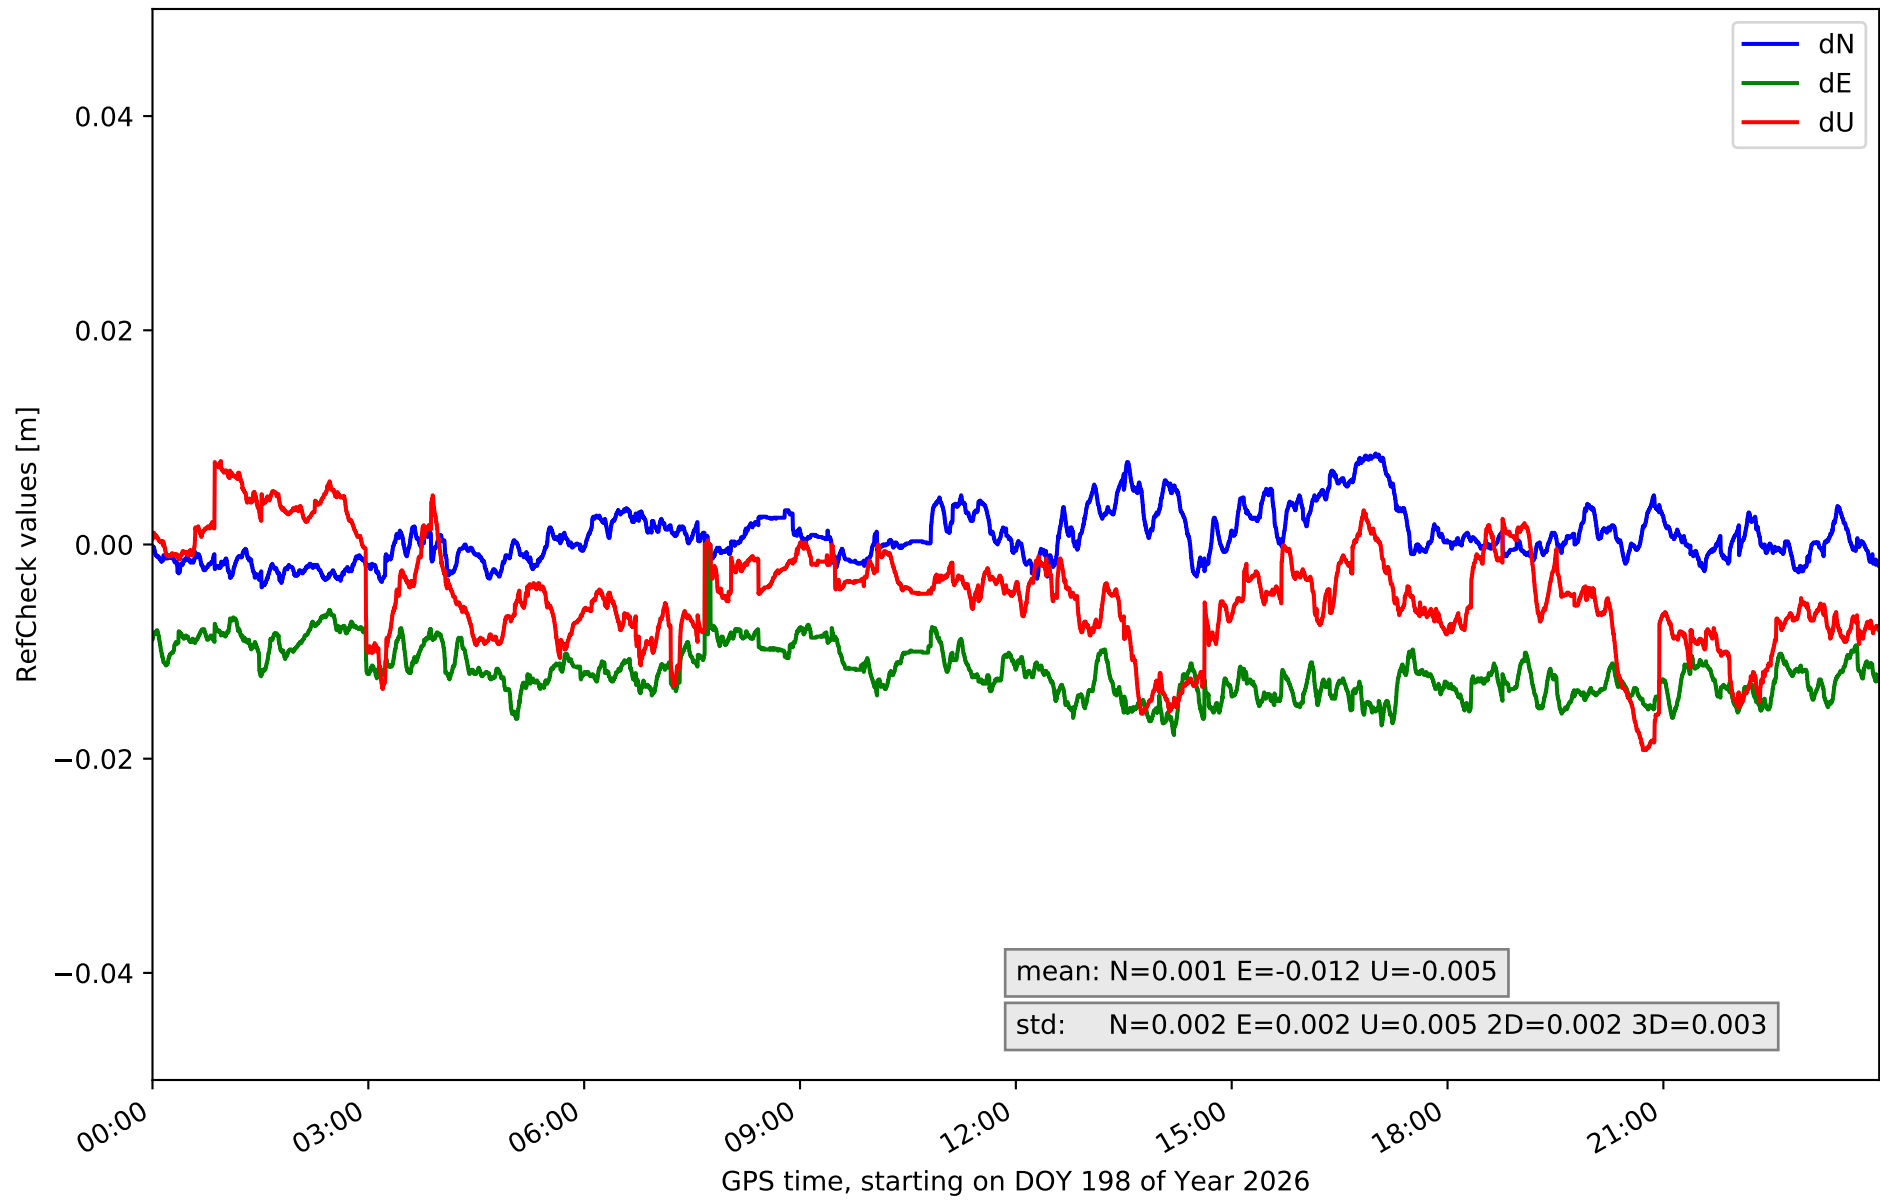


RefCheck for station LP01 in network N32T

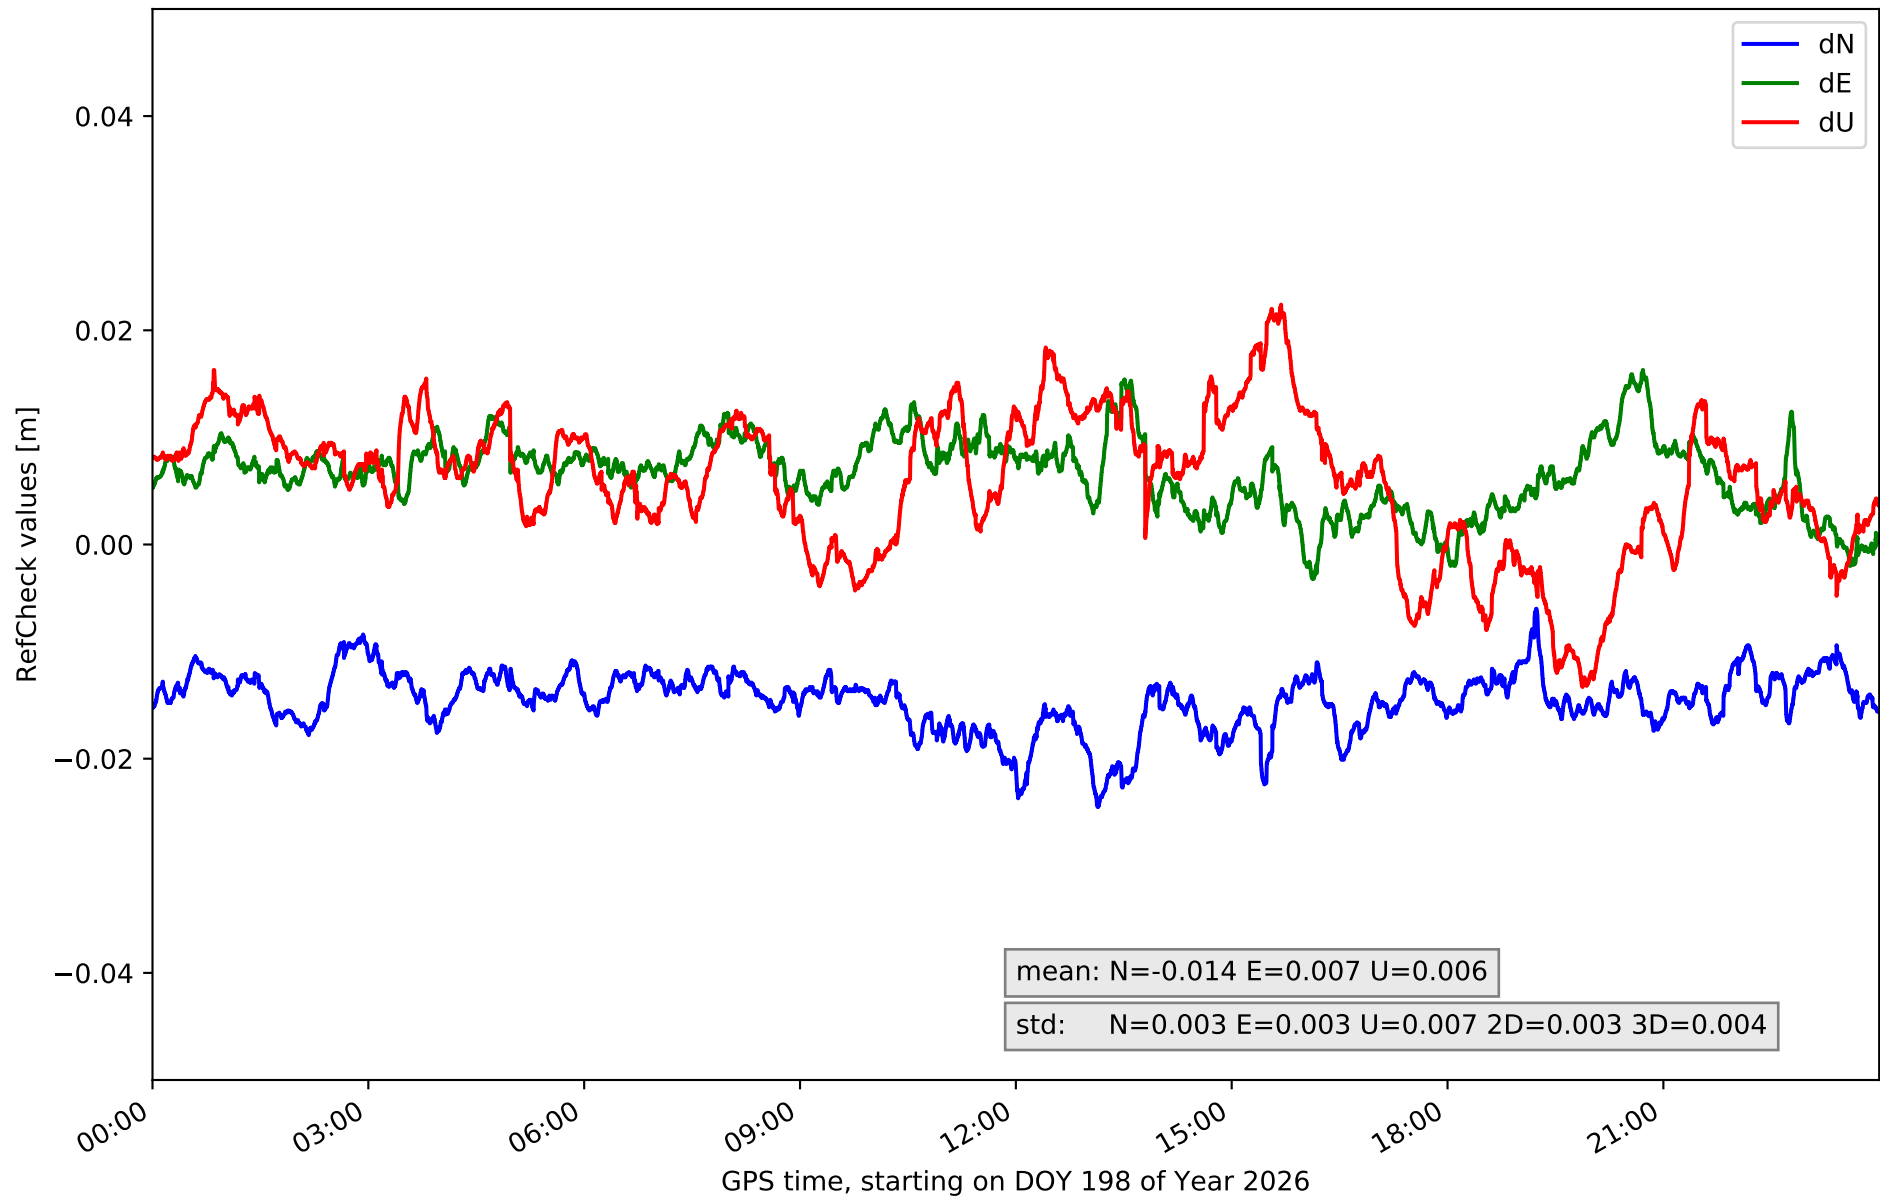


RefCheck for station LP03 in network N32T

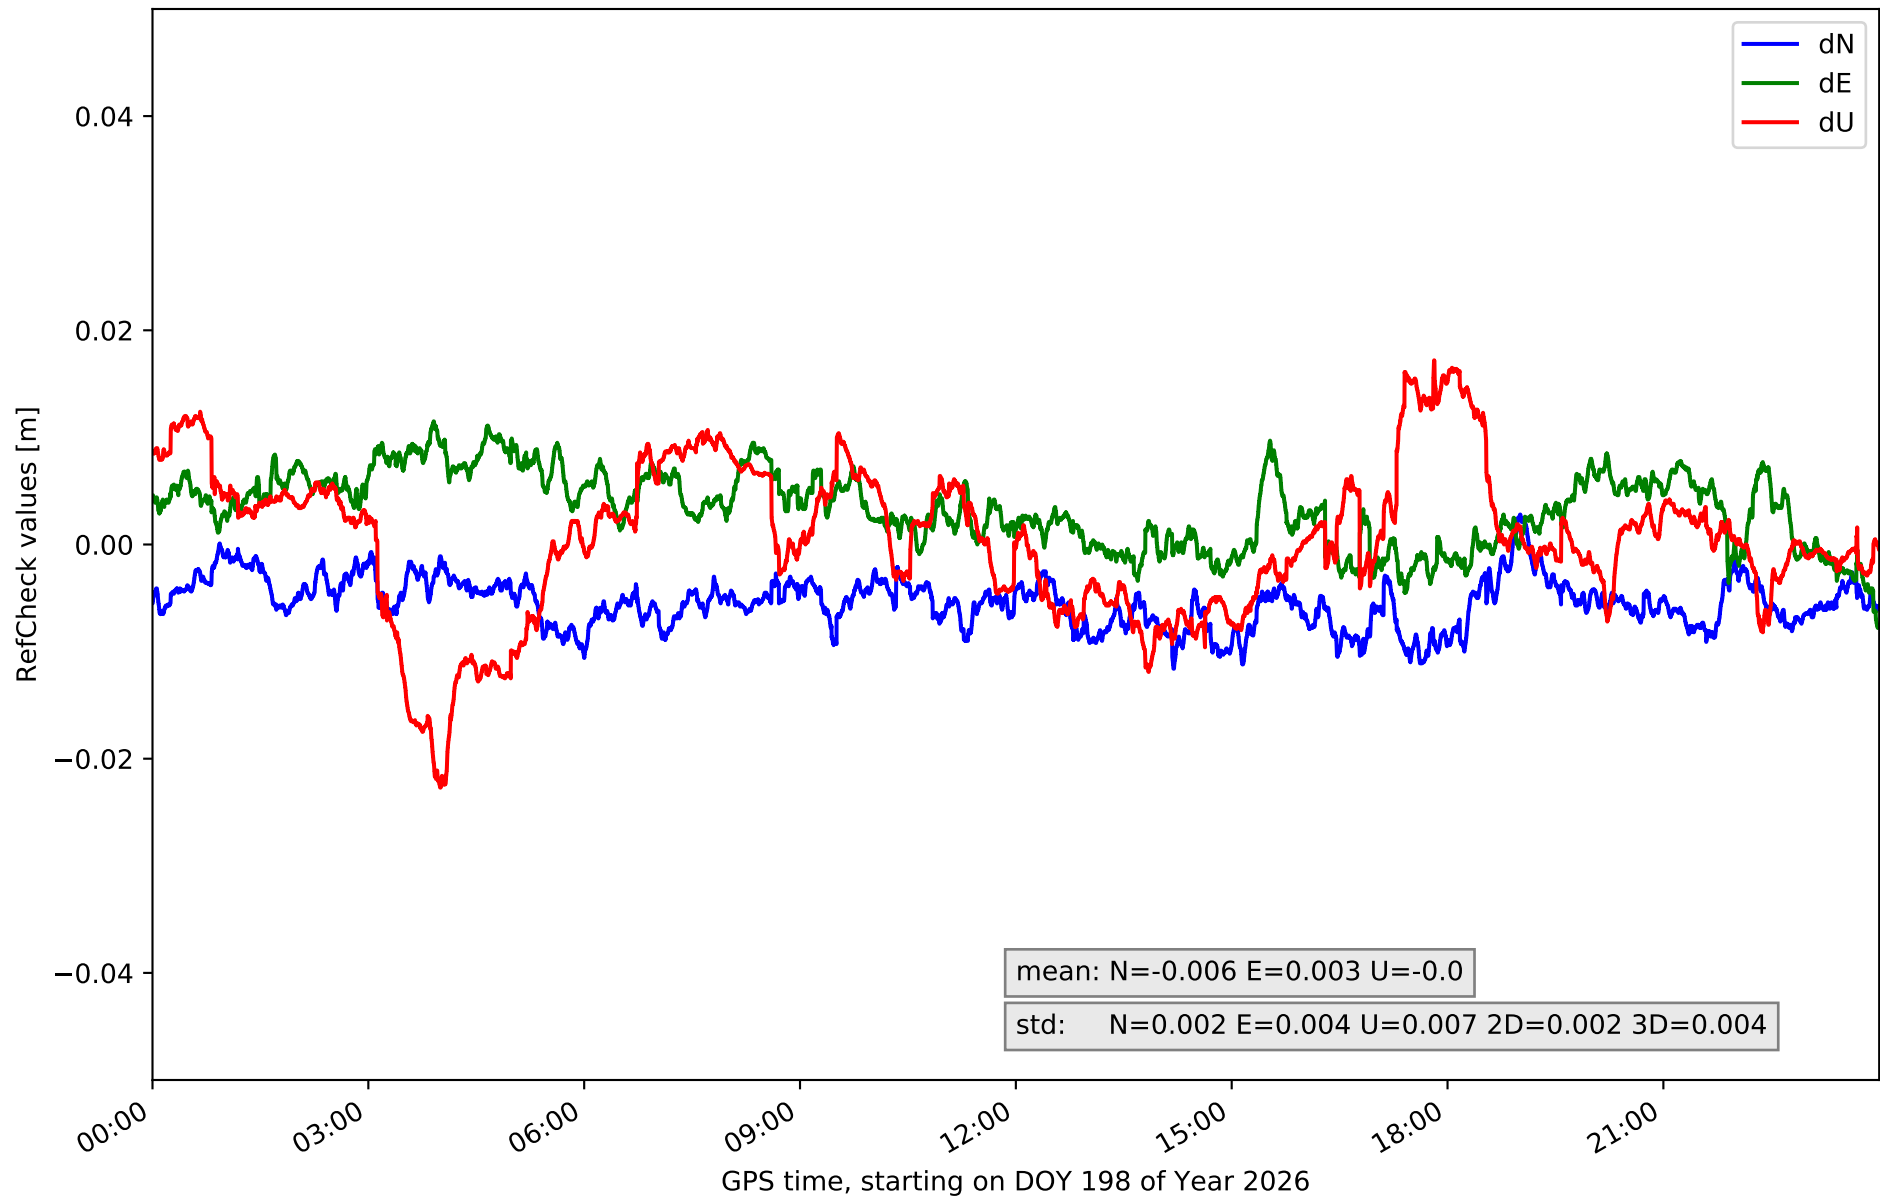


RefCheck for station LPAL in network N32T

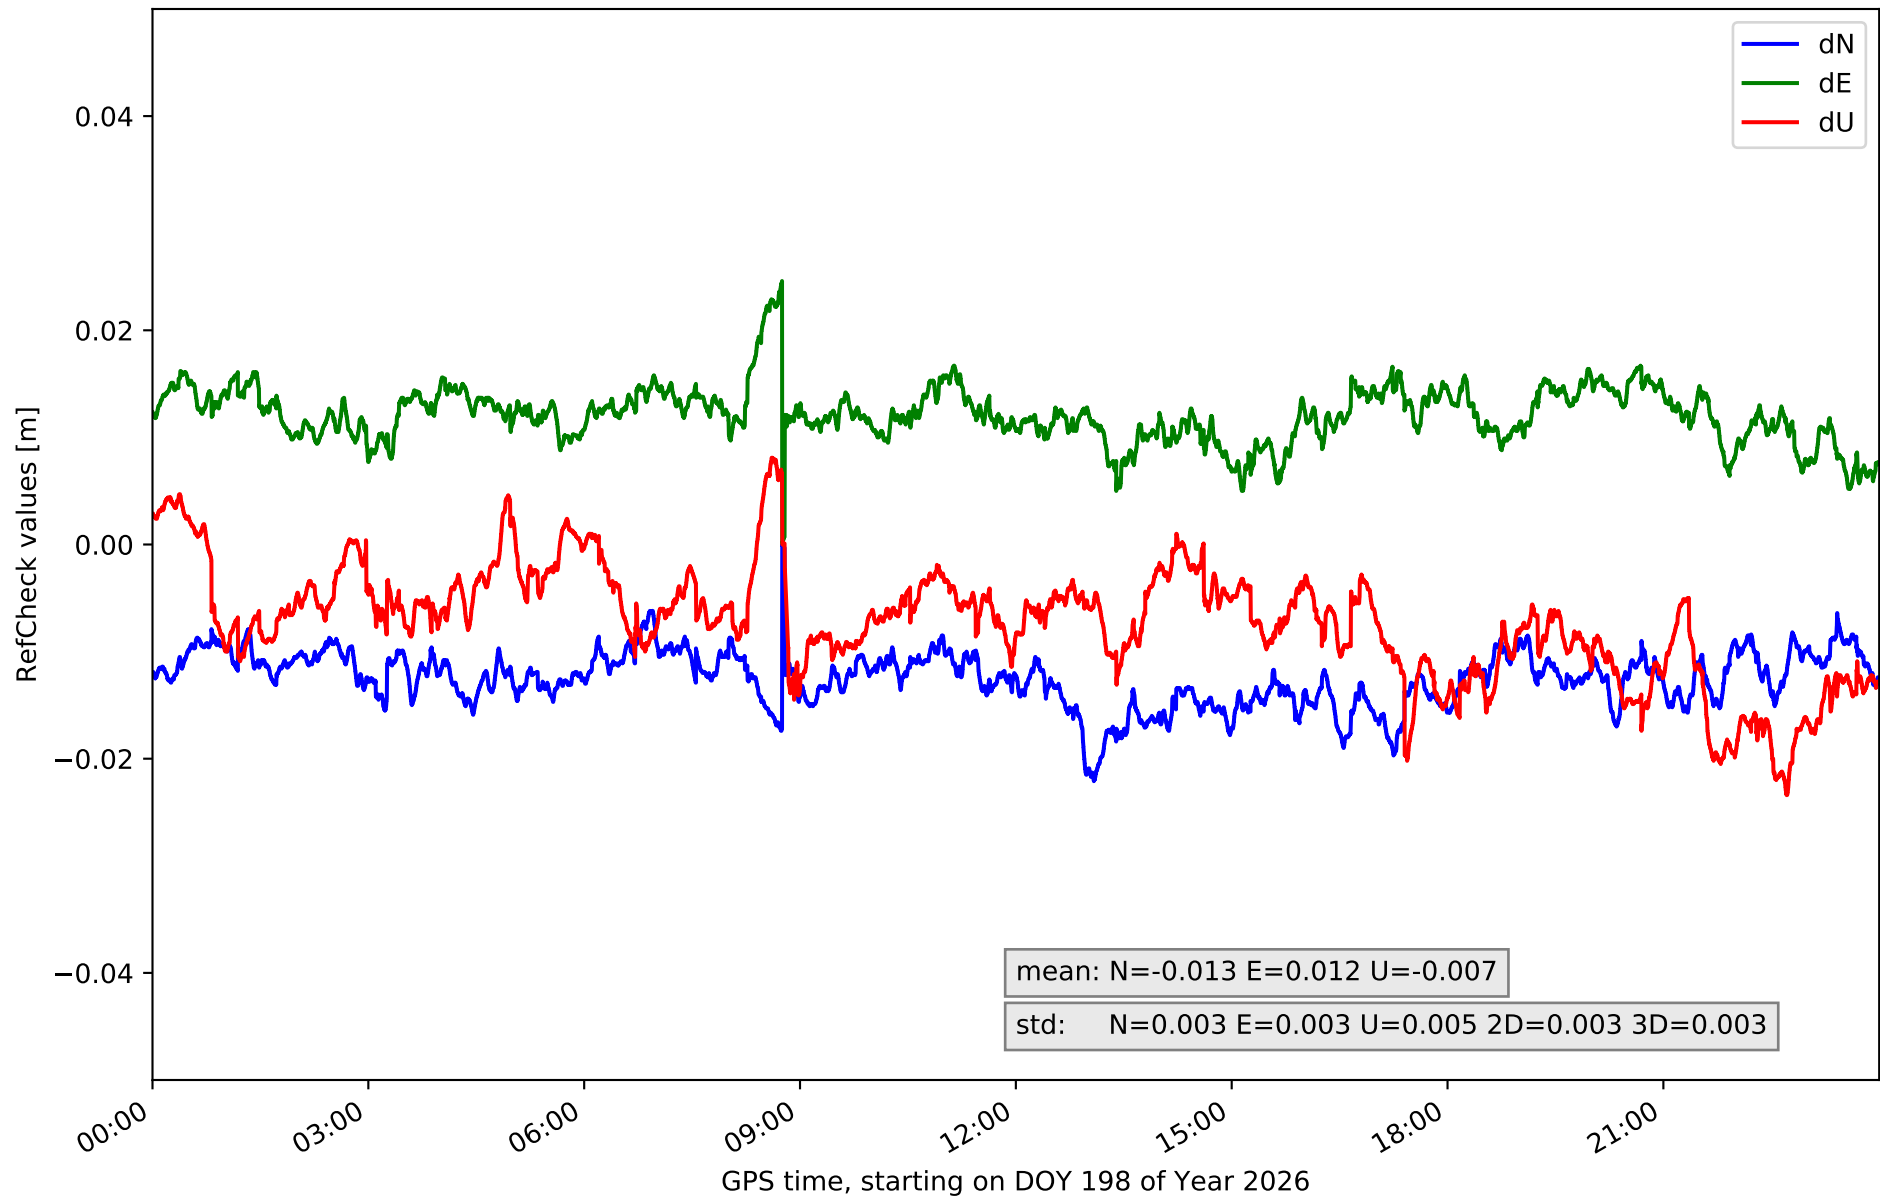


RefCheck for station LRES in network N32T

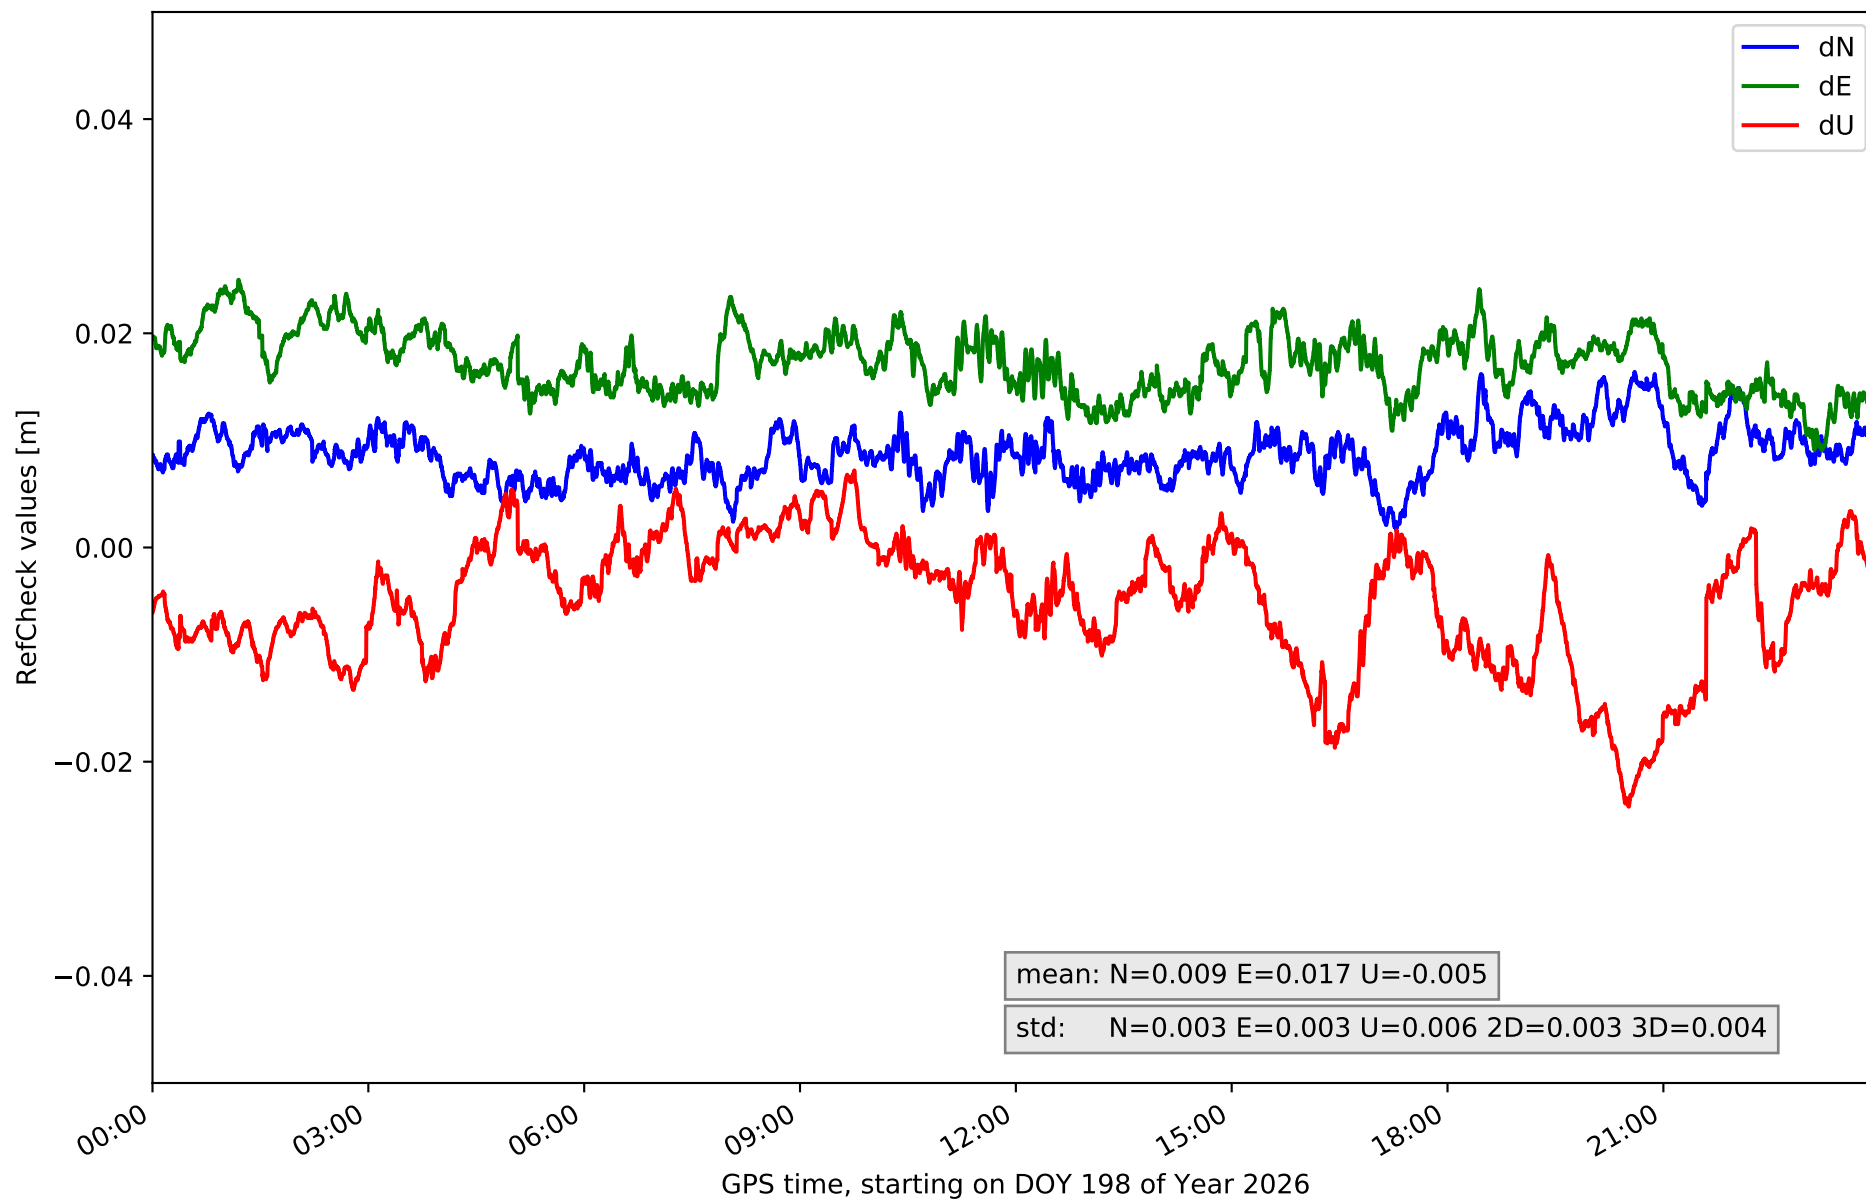


RefCheck for station TN01 in network N32T

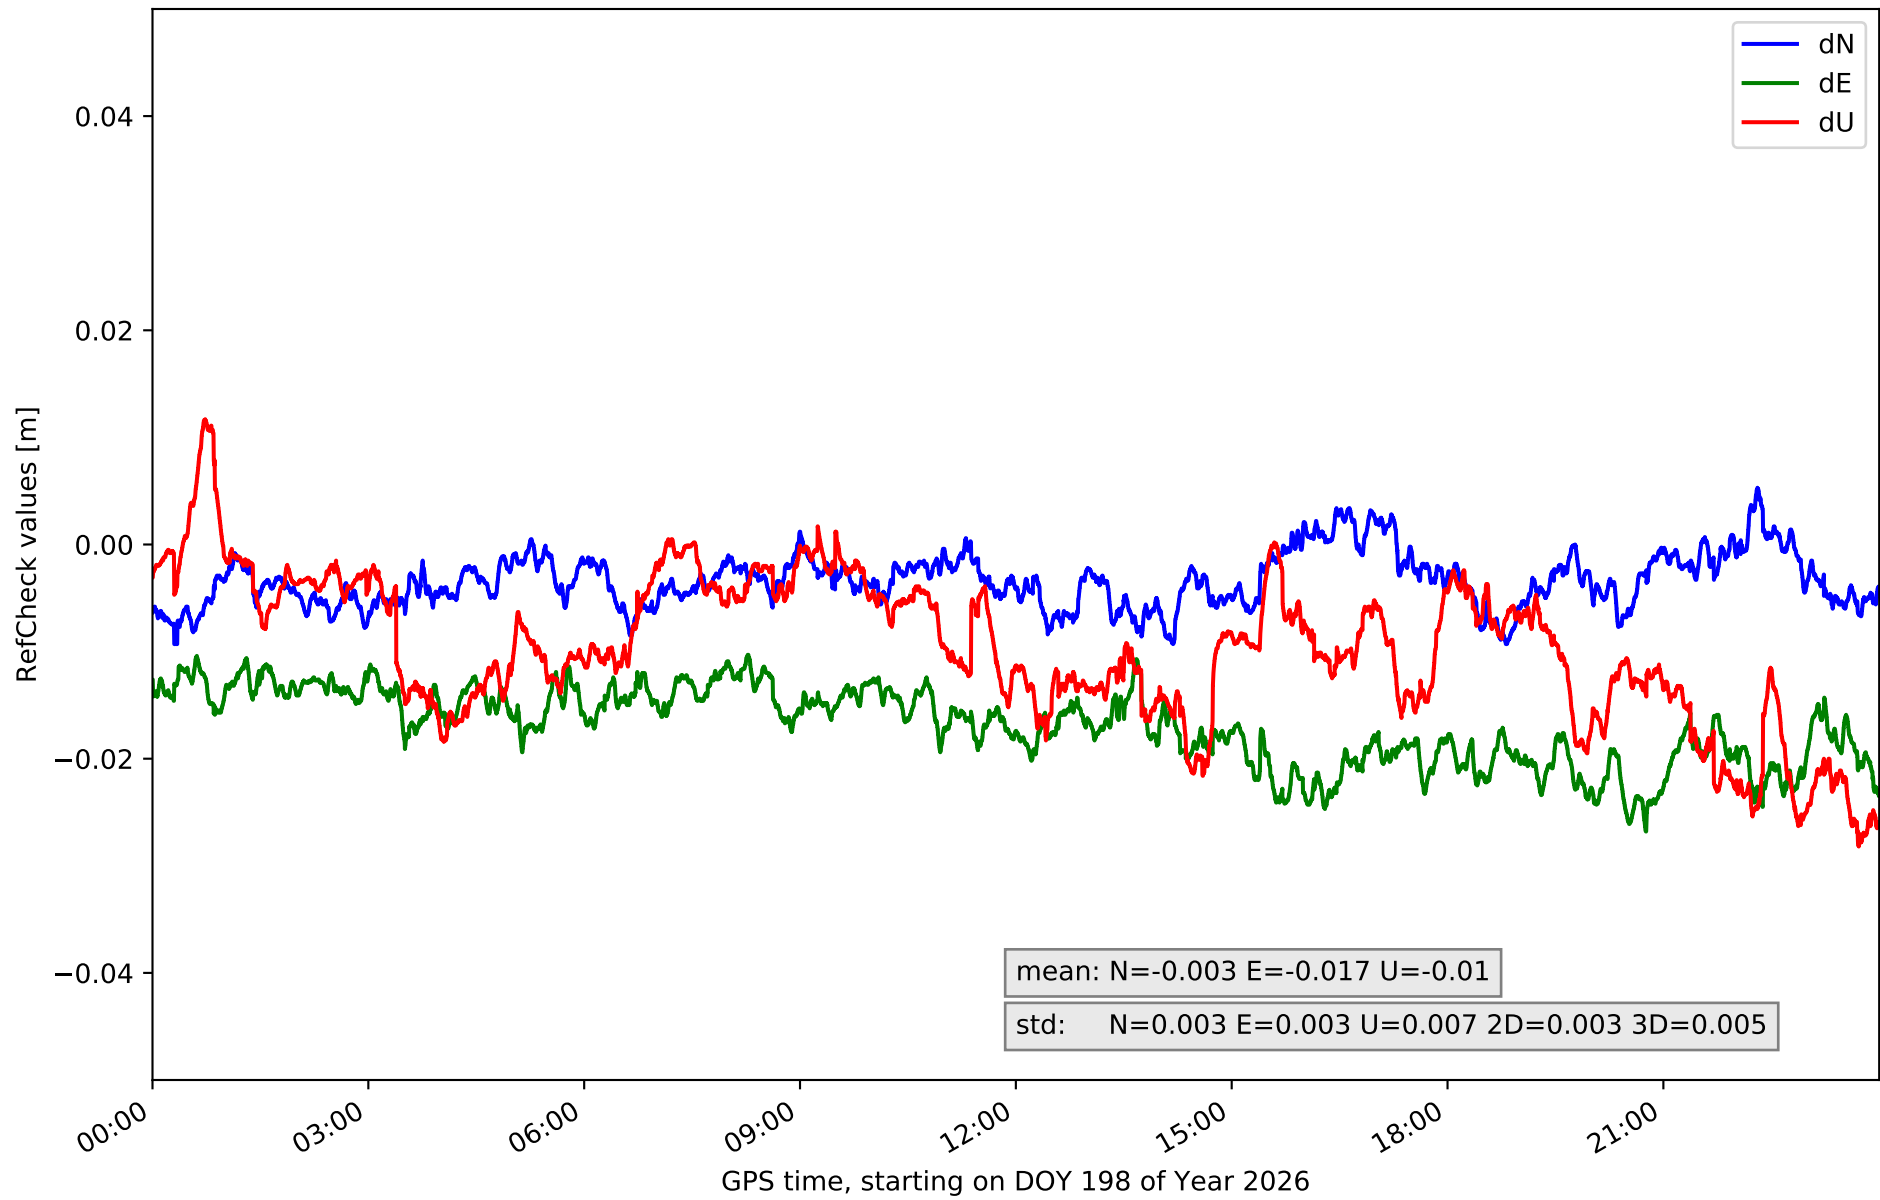


RefCheck for station TN02 in network N32T

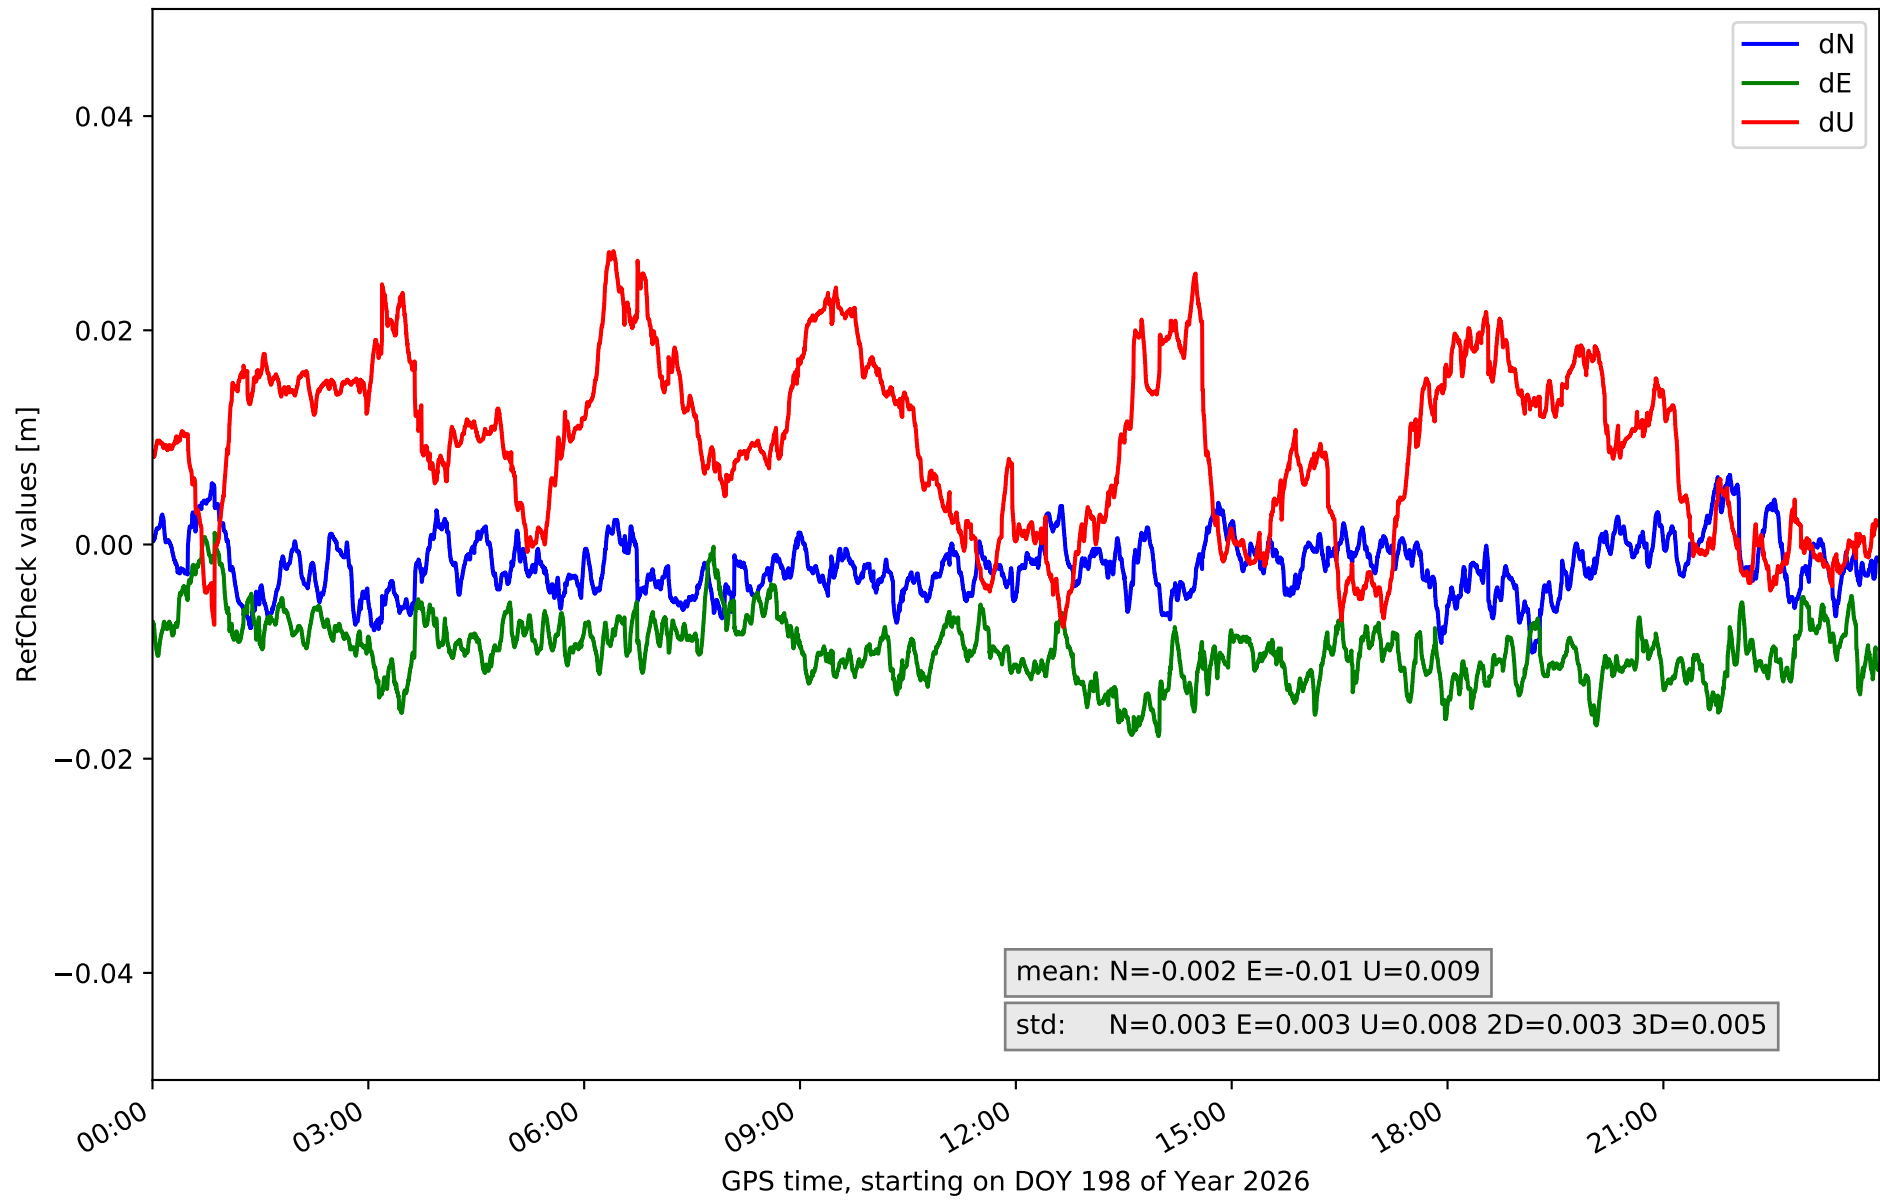


RefCheck for station TN03 in network N32T

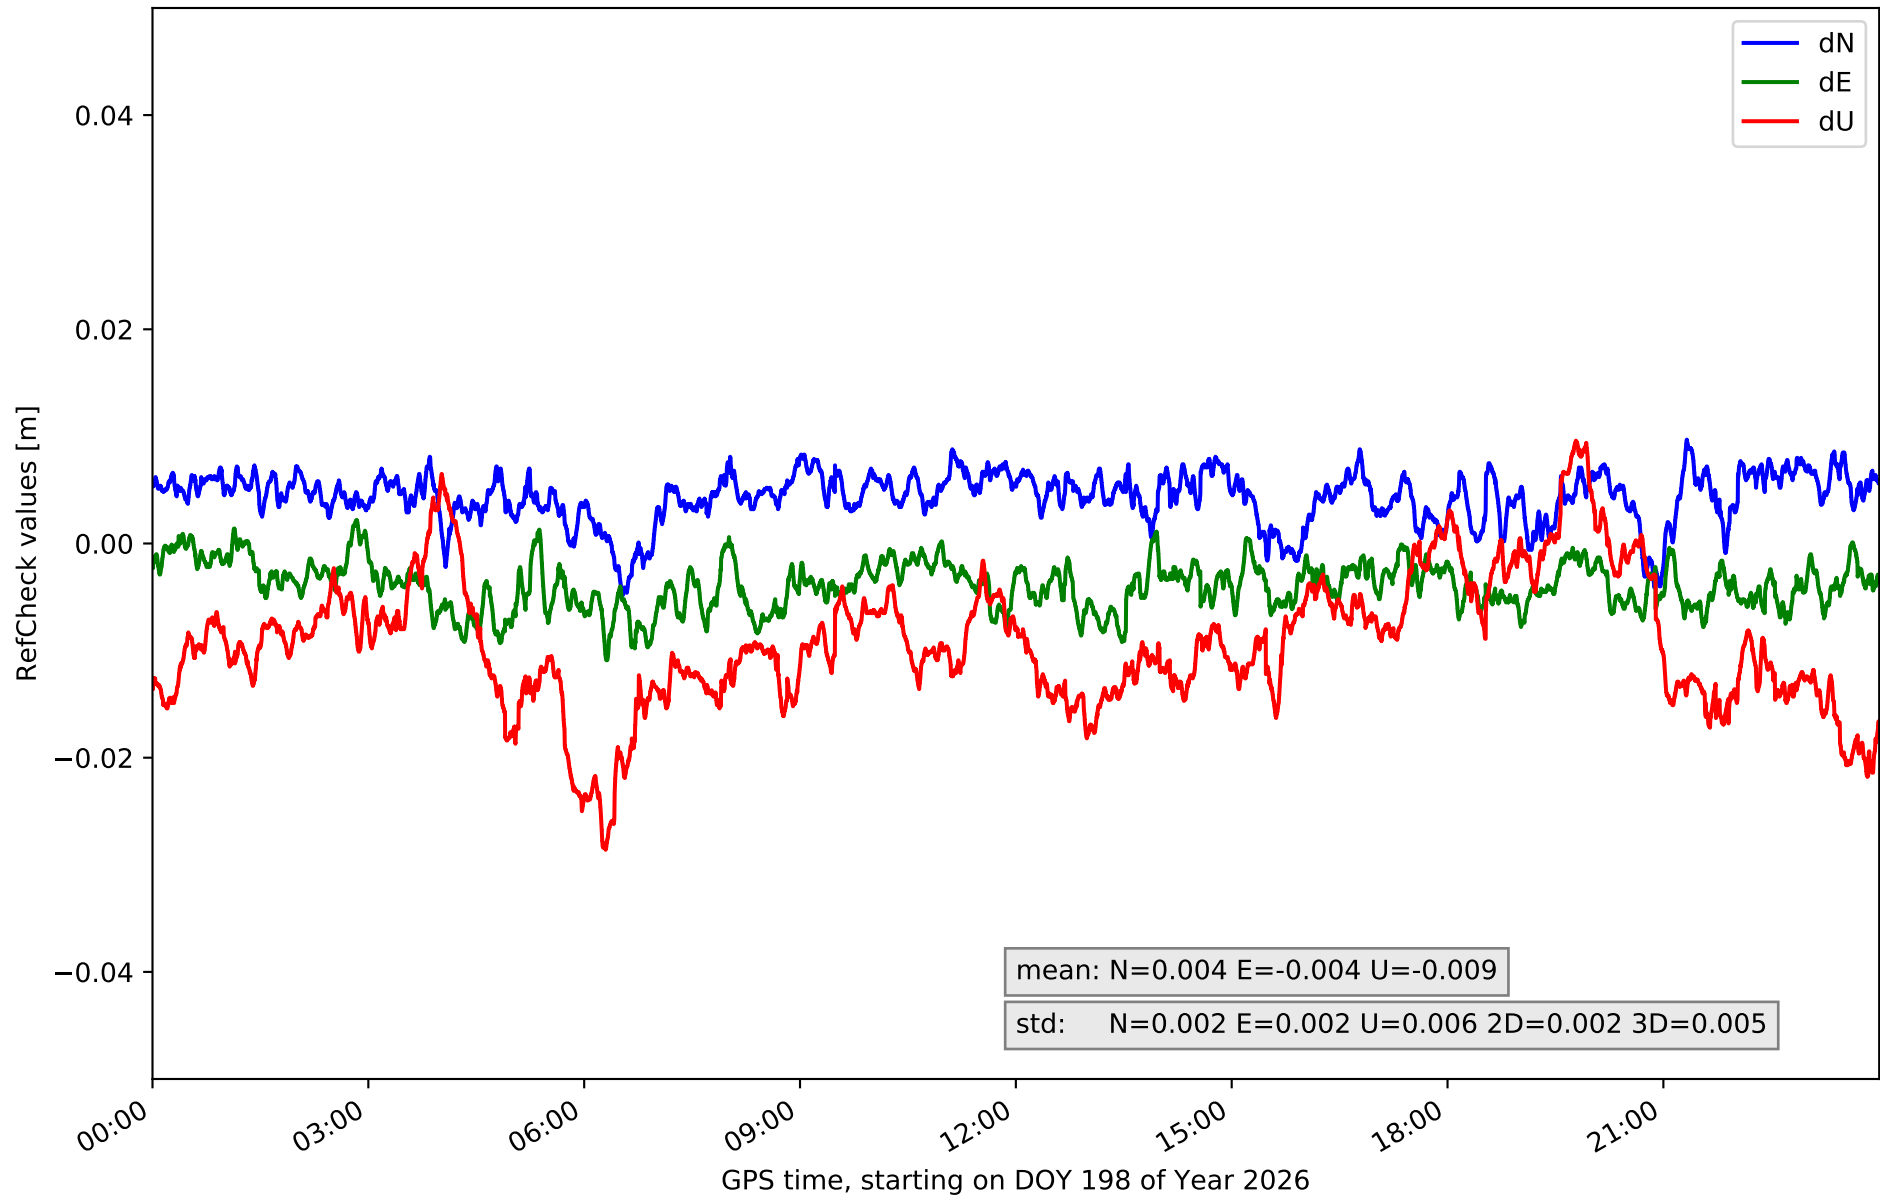


RefCheck for station TN06 in network N32T

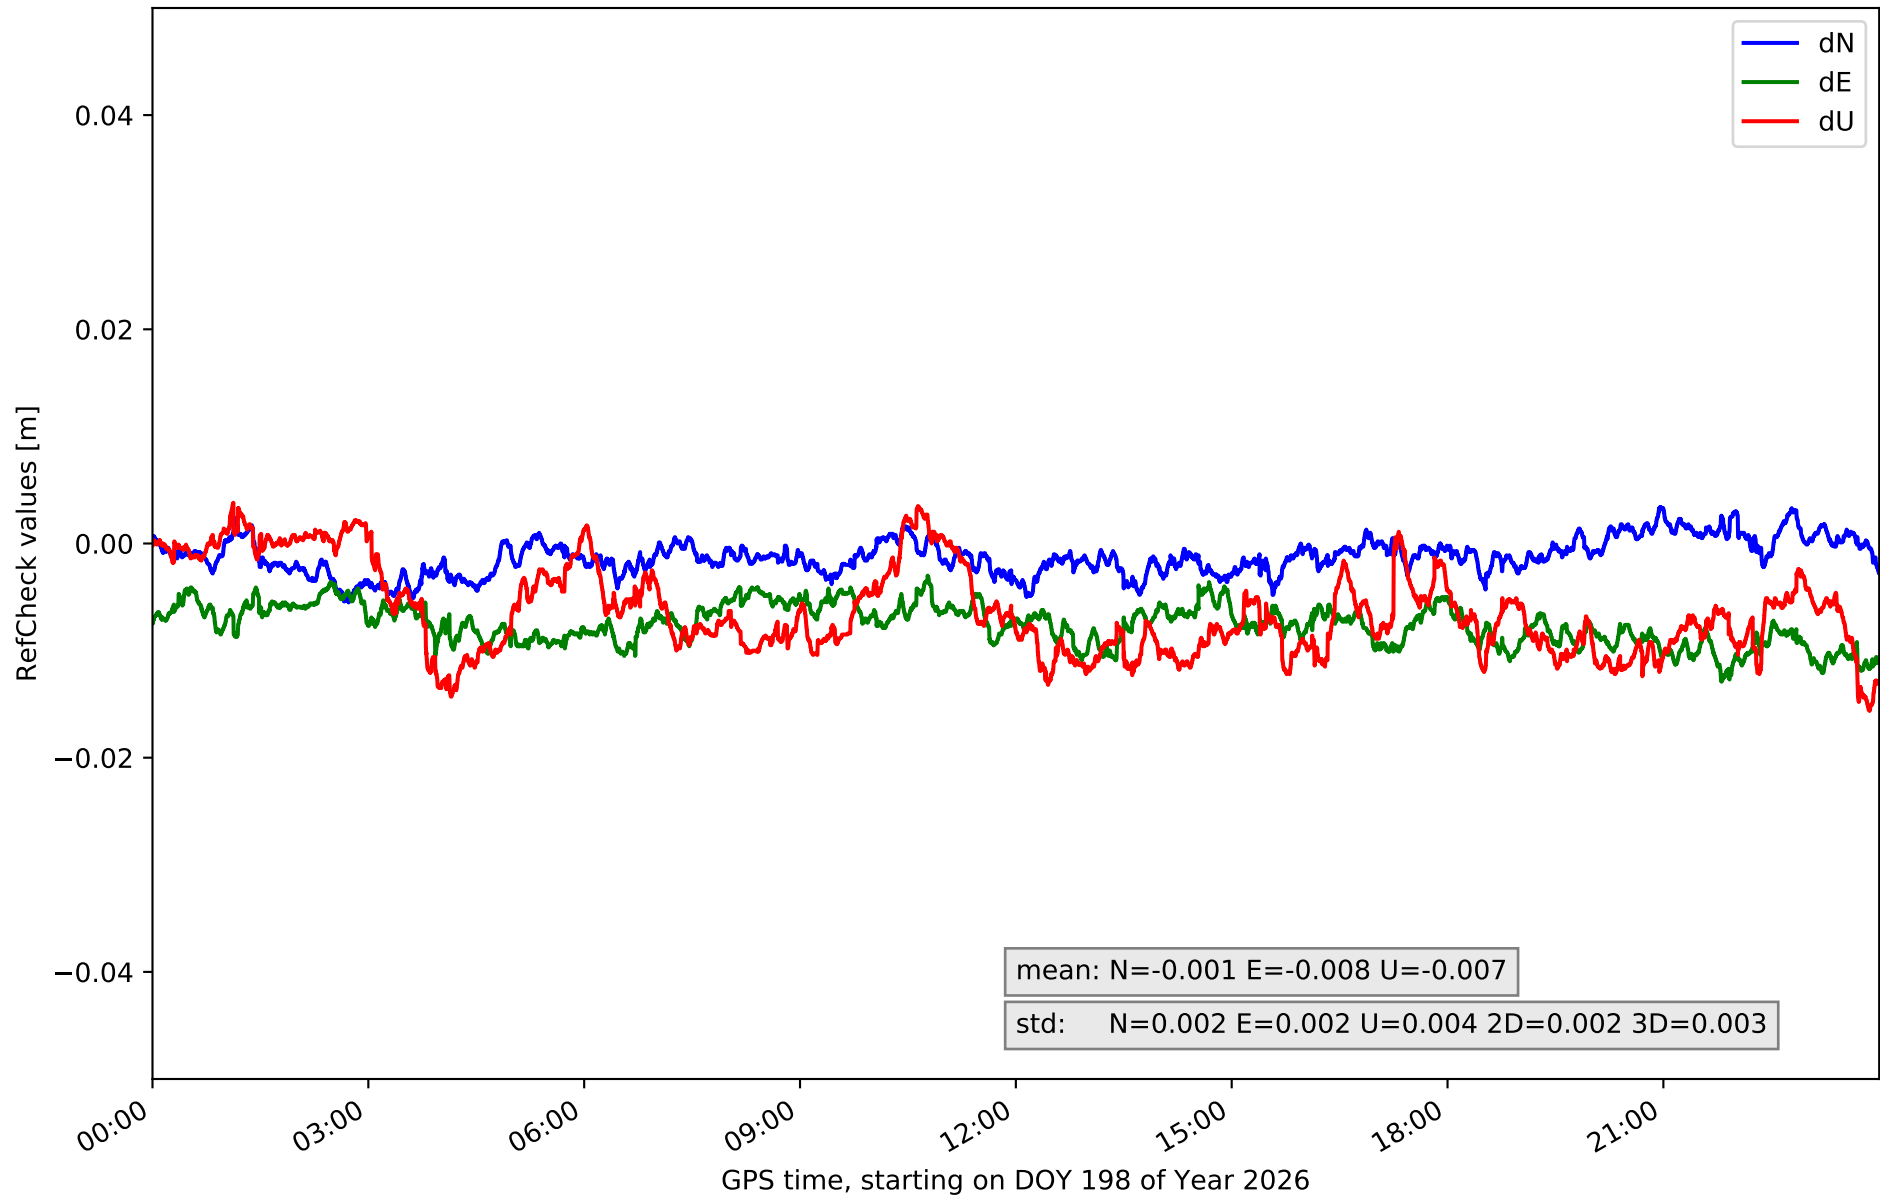

RefCheck for station TN09 in network N32T

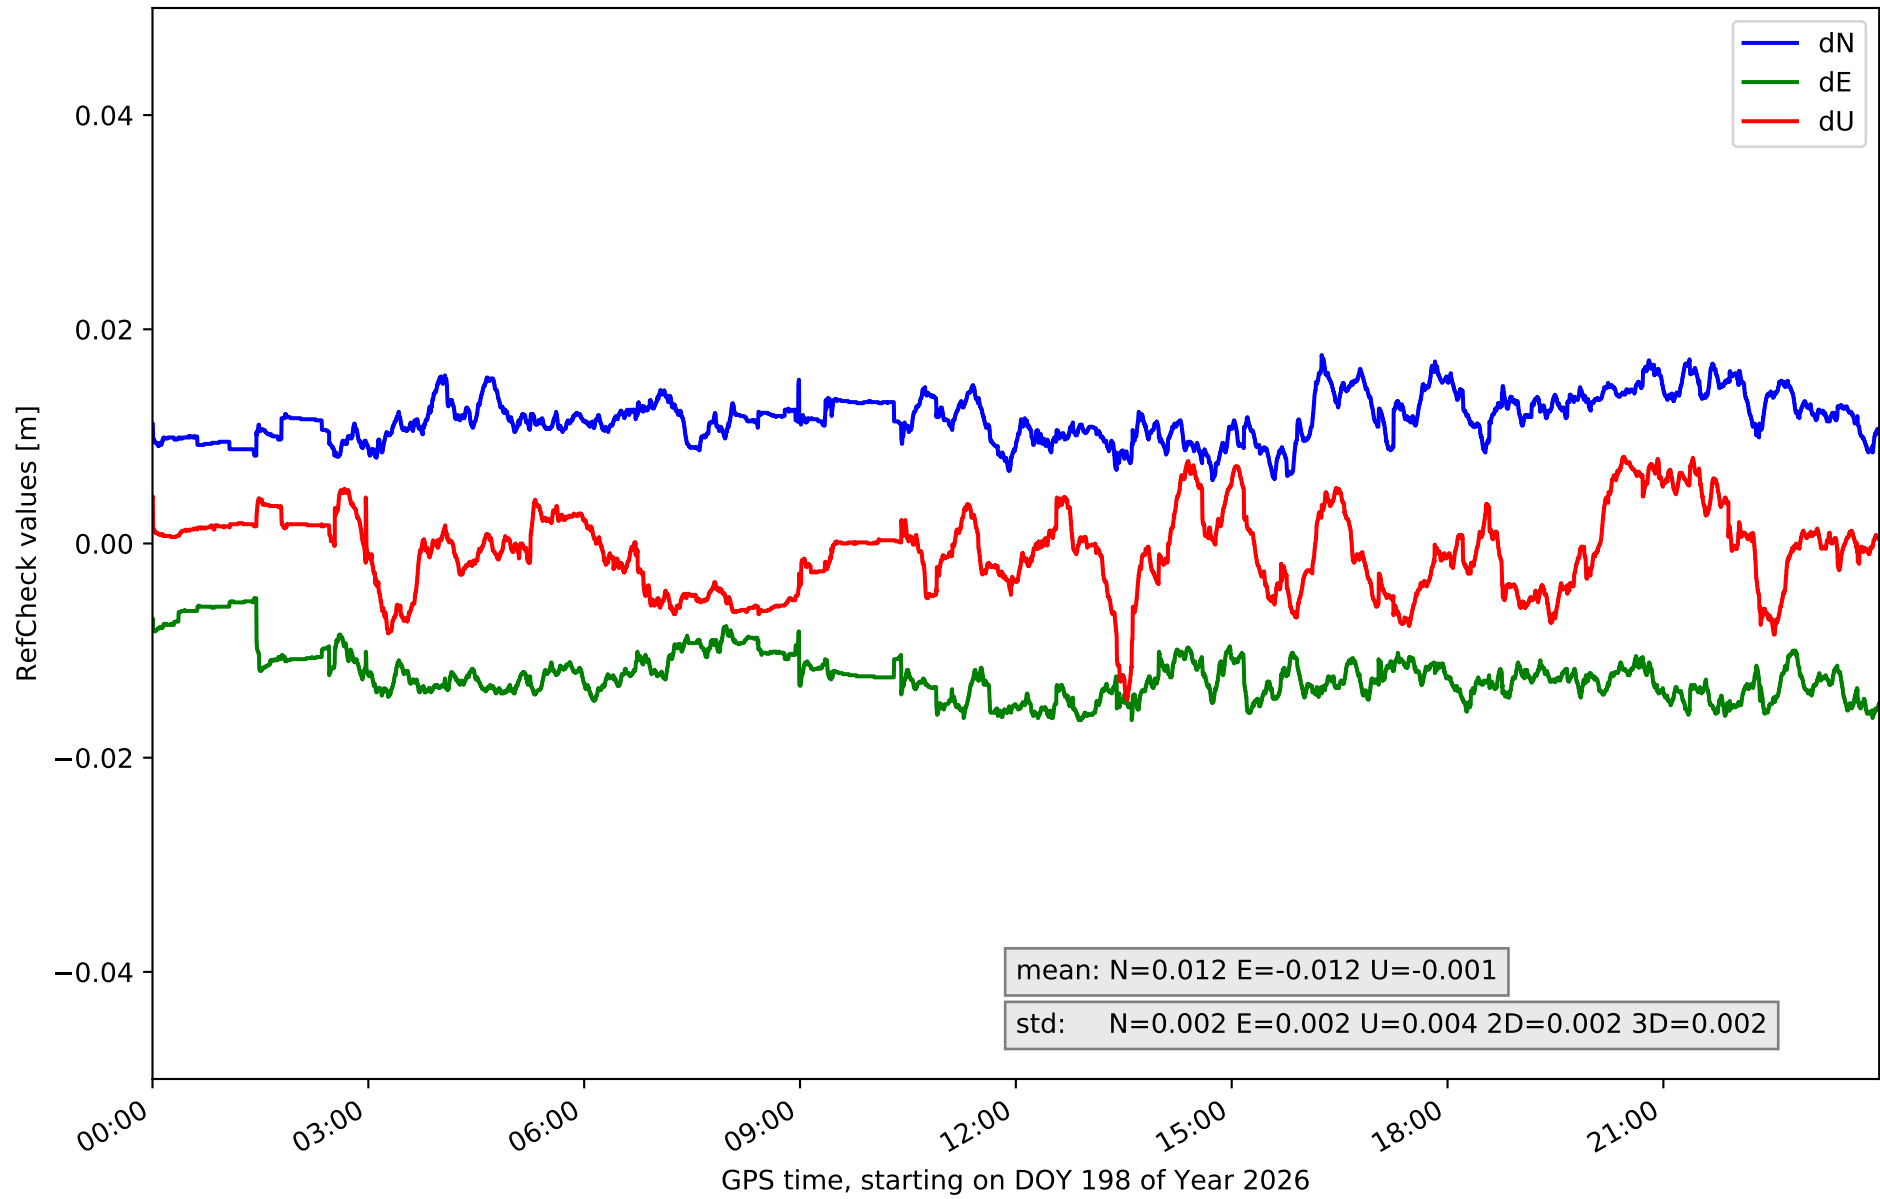

RefCheck for station TE11 in network N32T

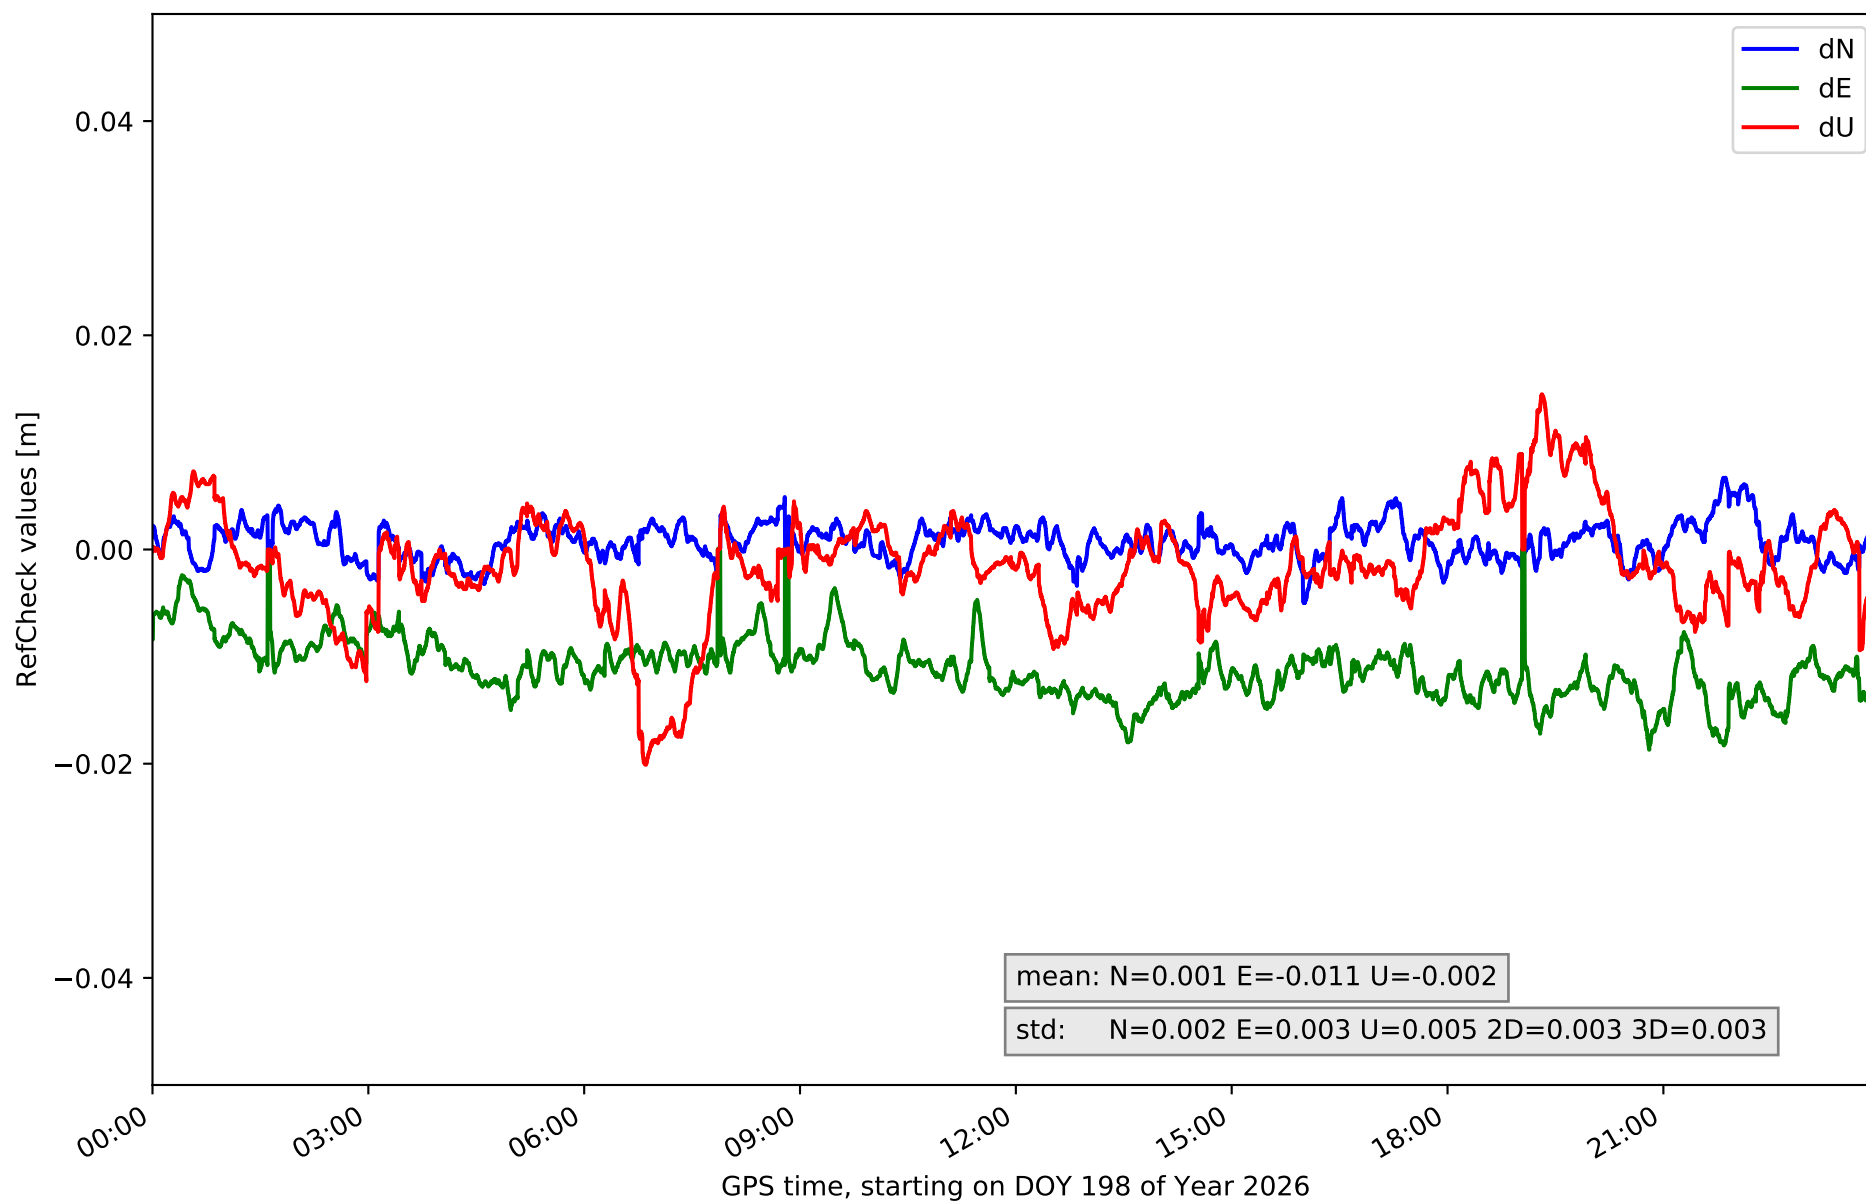

RefCheck values for network N32T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
EH01	-0.005	0.009	0.002	0.008	0.026	0.003	-0.007	0.022	0.006	0.003	0.002	68336	99.8	26391	38.5
EH02	-0.001	0.019	0.003	-0.005	0.029	0.004	-0.009	0.045	0.01	0.004	0.006	67625	98.7	66454	97.0
GOM1	-0.023	0.004	0.004	-0.03	0.02	0.005	-0.04	0.038	0.012	0.003	0.006	64076	93.5	28815	42.1
GOME	-0.008	0.01	0.003	-0.005	0.008	0.002	-0.011	0.022	0.006	0.002	0.004	527	0.8	1294	1.9
IZAN	-0.004	0.009	0.002	-0.018	0.0	0.002	-0.019	0.008	0.005	0.002	0.003	56427	82.4	4008	5.9
LP01	-0.025	-0.006	0.003	-0.003	0.016	0.003	-0.013	0.022	0.007	0.003	0.004	68115	99.4	20069	29.3
LP03	-0.012	0.003	0.002	-0.008	0.011	0.004	-0.023	0.017	0.007	0.002	0.004	8091	11.8	883	1.3
LPAL	-0.022	-0.0	0.003	0.0	0.025	0.003	-0.023	0.008	0.005	0.003	0.003	68431	99.9	26614	38.9
LRES	0.002	0.016	0.003	0.009	0.025	0.003	-0.024	0.007	0.006	0.003	0.004	68494	100.0	34716	50.7
TN01	-0.009	0.005	0.003	-0.027	-0.01	0.003	-0.028	0.012	0.007	0.003	0.005	68494	100.0	38641	56.4
TN02	-0.01	0.006	0.003	-0.018	0.001	0.003	-0.008	0.027	0.008	0.003	0.005	40253	58.8	14926	21.8
TN03	-0.005	0.01	0.002	-0.011	0.002	0.002	-0.029	0.01	0.006	0.002	0.005	1710	2.5	4354	6.4
TN06	-0.005	0.003	0.002	-0.013	-0.003	0.002	-0.016	0.004	0.004	0.002	0.003	9967	14.6	0	0.0
TN09	0.006	0.018	0.002	-0.017	-0.005	0.002	-0.015	0.008	0.004	0.002	0.002	68422	99.9	9824	14.3
TE11	-0.005	0.007	0.002	-0.019	0.0	0.003	-0.02	0.015	0.005	0.003	0.003	51443	75.1	1776	2.6
Mean	-0.008	0.008	0.003	-0.01	0.01	0.003	-0.019	0.018	0.007	0.003	0.004	47360.7	69.1	18584.3	27.1
Min/Max	-0.025	0.019	0.004	-0.03	0.029	0.005	-0.04	0.045	0.012	0.004	0.006	68494	100.0	66454	97.0

fixing statistic for network N32T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	95.0	95.4	95.1	95.3	94.0
considering satellites with dual-frequency fixed	93.5	93.5	93.0	94.4	92.8
considering all signals separately	93.6	93.4	93.0	94.7	92.3