

summary for network NT10

timeperiod chosen: from 2025-09-07-00:00:00 until 2025-09-07-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.3 seconds


average fixing percentage with threshold set to 0.3: 93.8 percent

stations available: 15 of 16


station information:

station BCL1:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 56.129
station BCLN:	antenna: LEIAR25.R4	LEIT	receiver: LEICA GR10	height: 84.875
station BELL:	antenna: LEIAR25.R4	NONE	receiver: LEICA GR50	height: 853.488
station BINE:	antenna: GPPNULLANTENNA	NONE	receiver: LEICA GR50	height: 346.97
station CREU:	antenna: LEIAR25.R4	NONE	receiver: LEICA GR50	height: 133.464
station EBRE:	antenna: LEIAR25.R4	NONE	receiver: LEICA GR50	height: 107.868
station EBRO:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 54.387
station ESCO:	antenna: LEIAR25.R4	NONE	receiver: LEICA GR50	height: 2508.504
station GRAU:	antenna: GPPNULLANTENNA	NONE	receiver: TPS NET-G3	height: 509.777
station MEQU:	antenna: GPPNULLANTENNA	NONE	receiver: LEICA GR50	height: 138.594
station OLOT:	antenna: TRM57971.00	TZGD	receiver: LEICA GR25	height: 600.533
station PUIG:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 1162.395
station TARR:	antenna: LEIAR20	LEIM	receiver: LEICA GR25	height: 491.514
station TRRG:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 55.163
station VRO2:	antenna: GPPNULLANTENNA	NONE	receiver: LEICA GR50	height: 541.427


Processing rate in network NT10

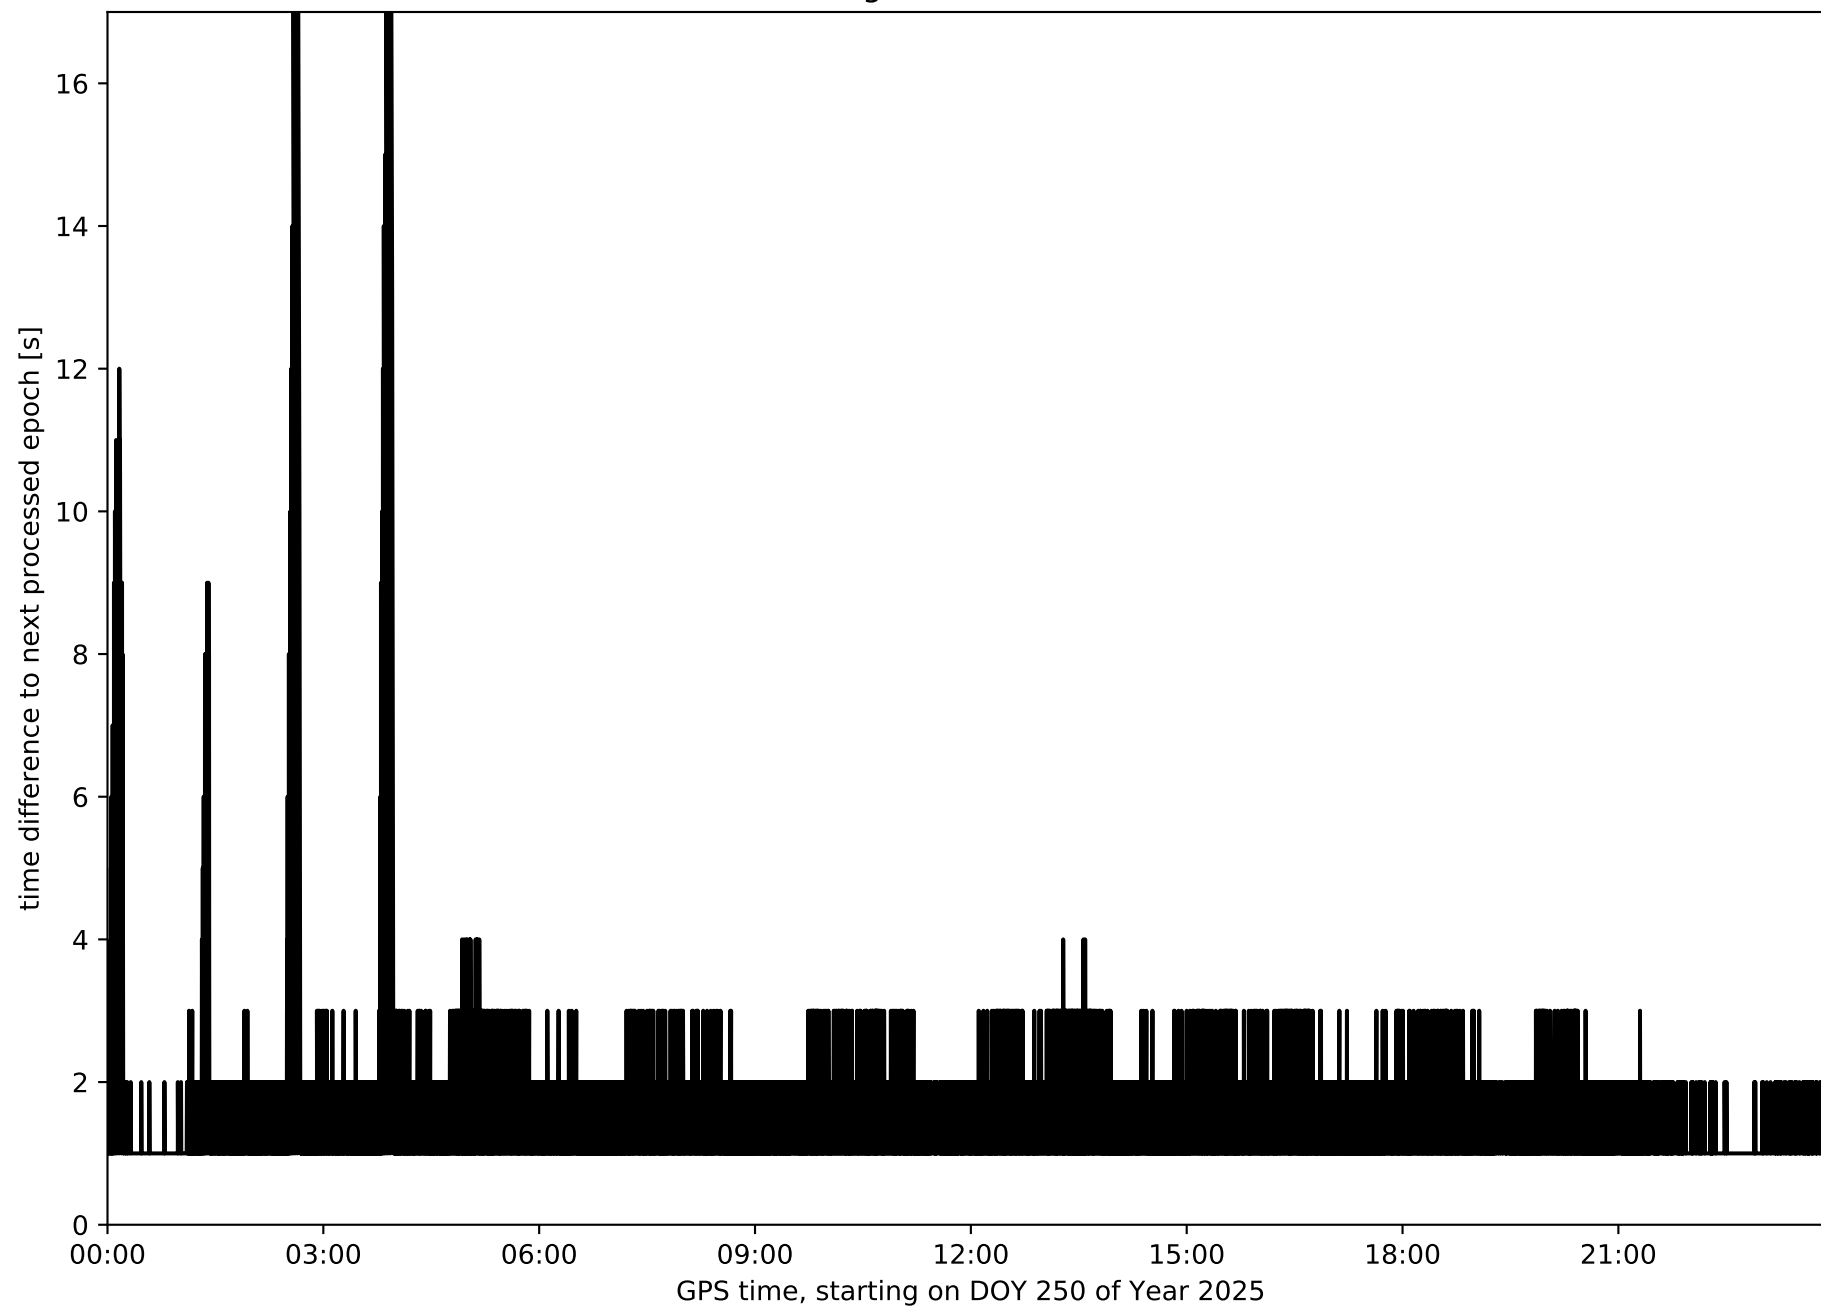


Histogram of the processing rate in network NT10 (durations larger 15 seconds neglected)

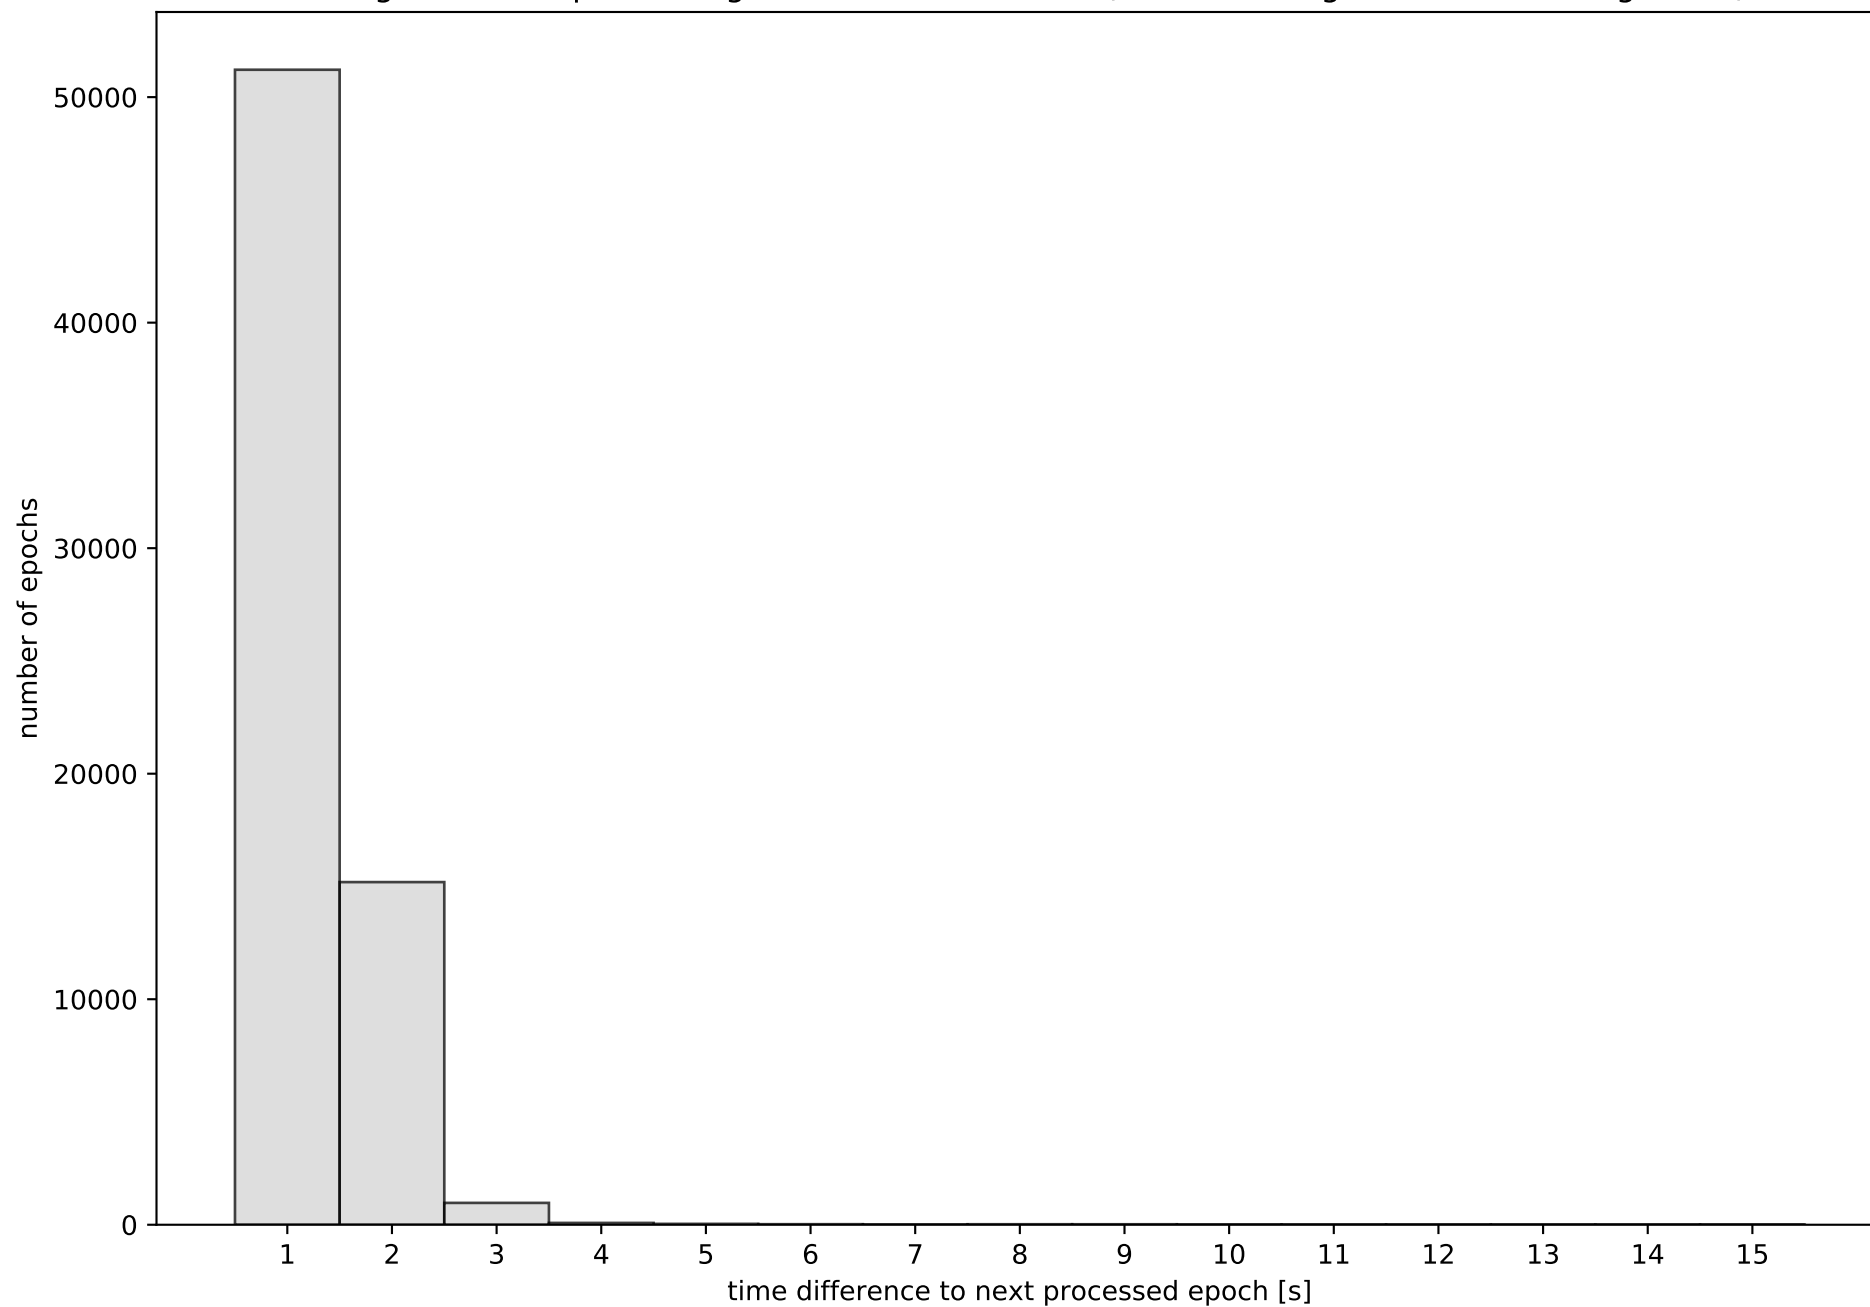


Network NT10 with threshold set to 0.3

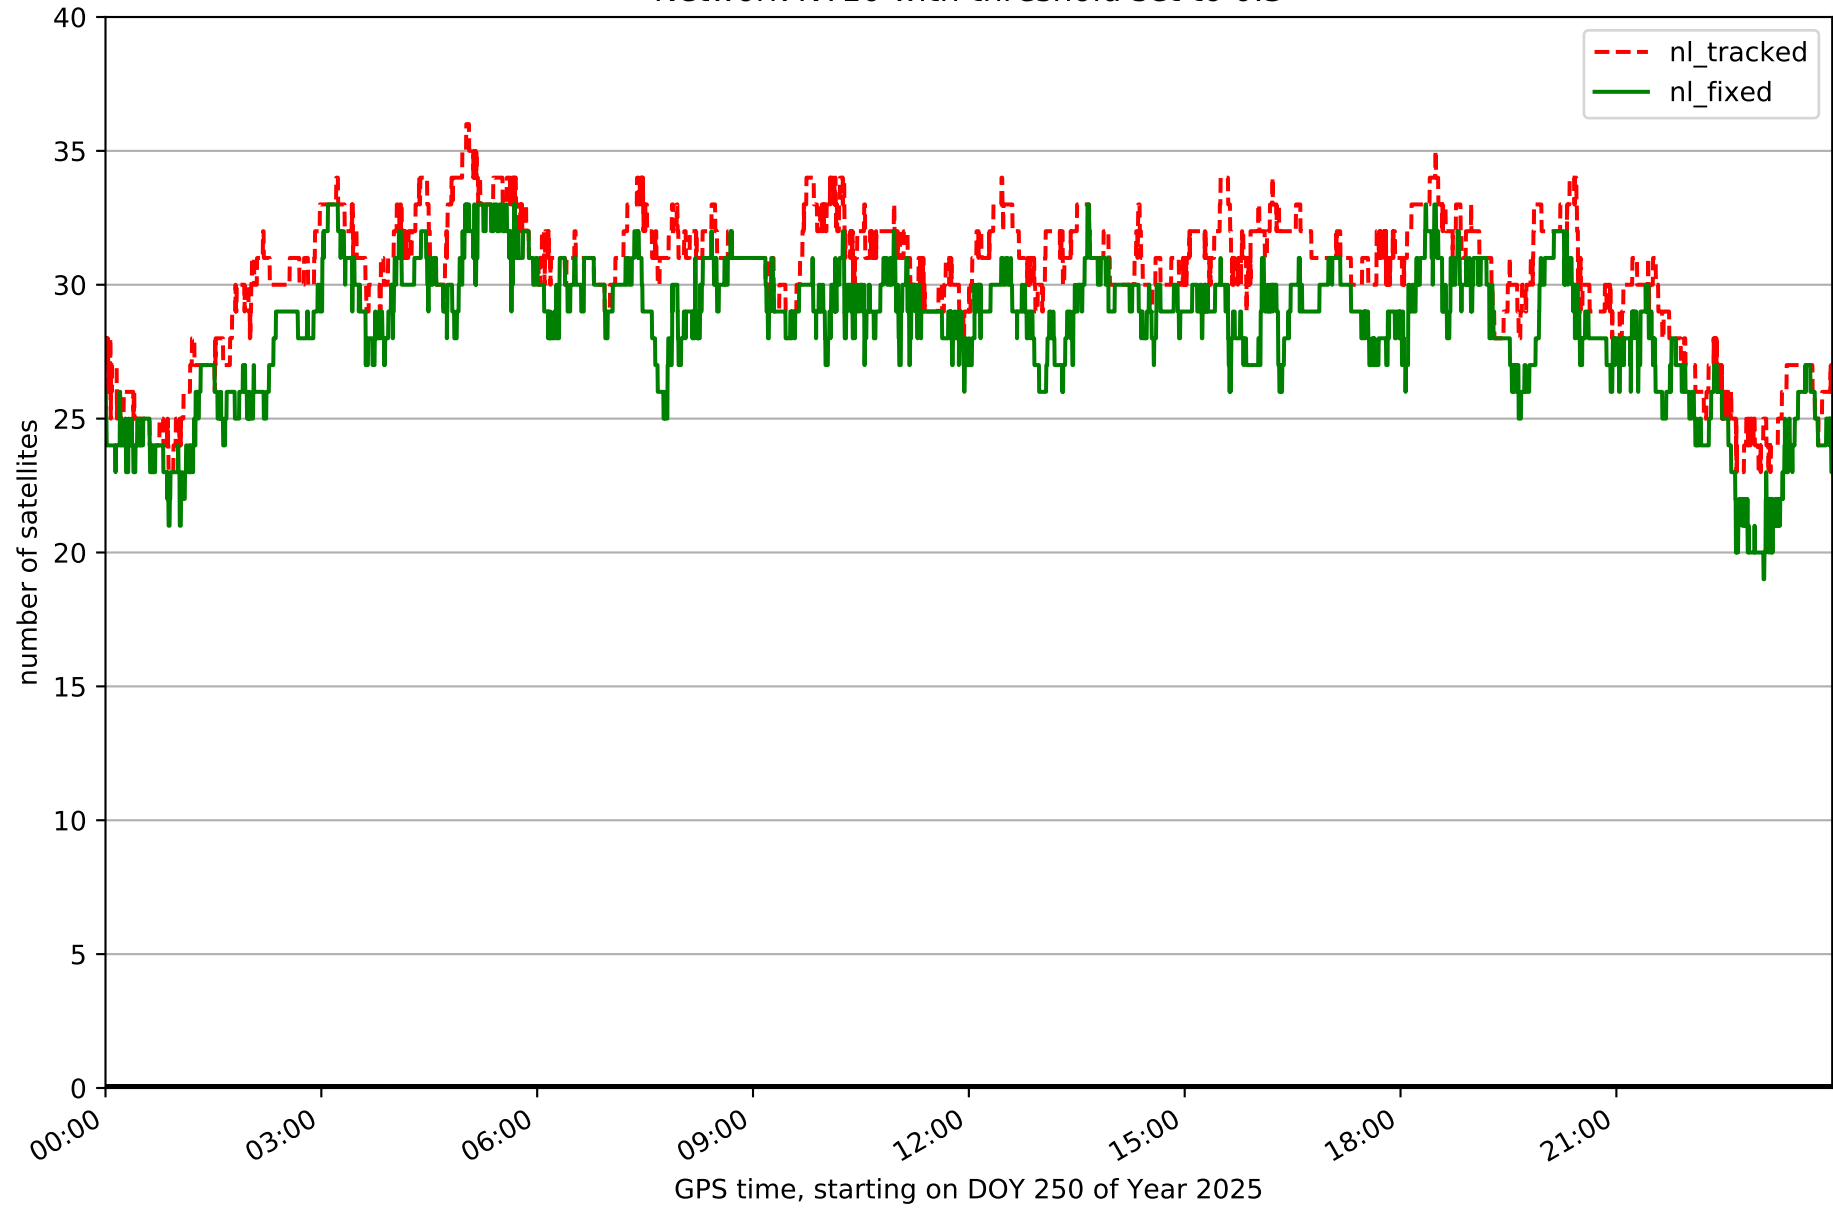


Fixing percentage of satellites in network NT10 with threshold set to 0.3

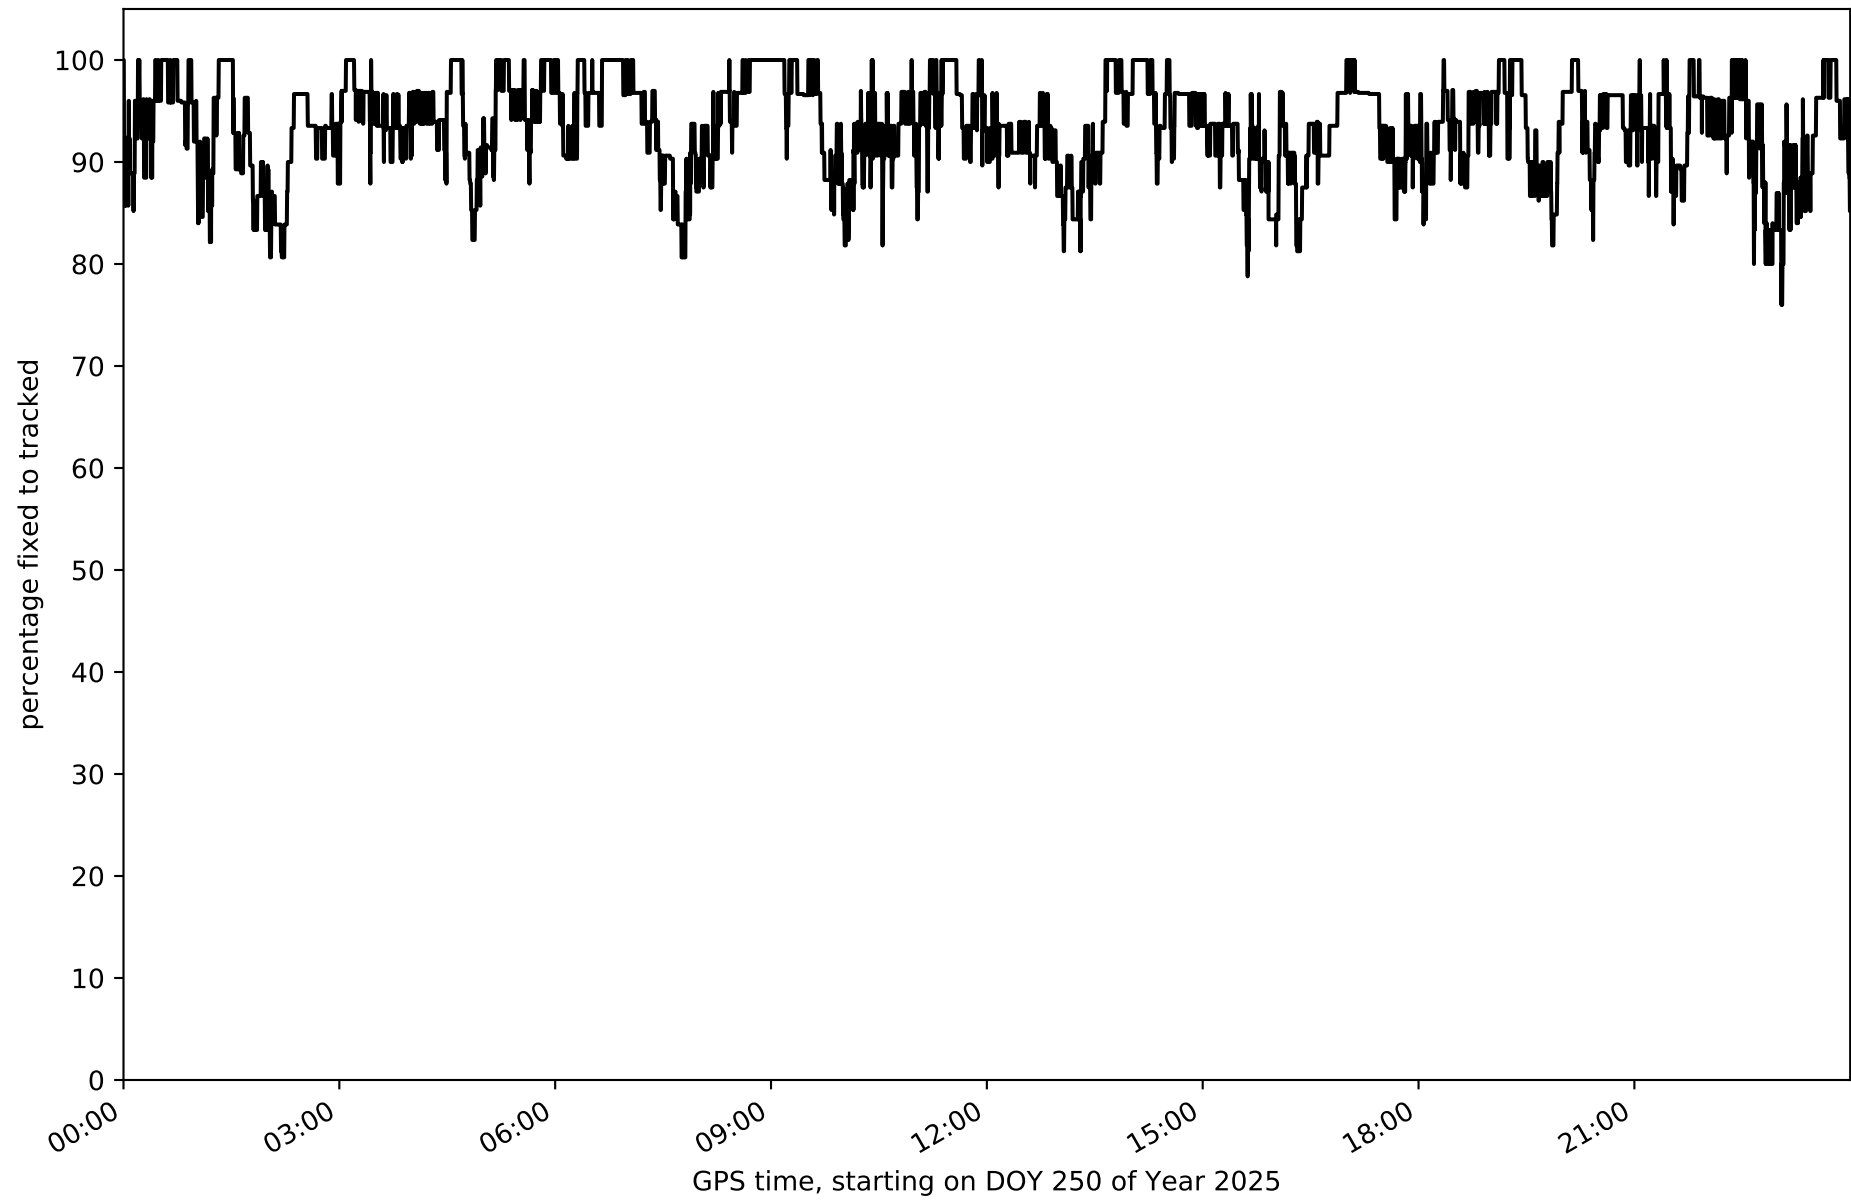


Network NT10 - only GPS with threshold set to 0.3

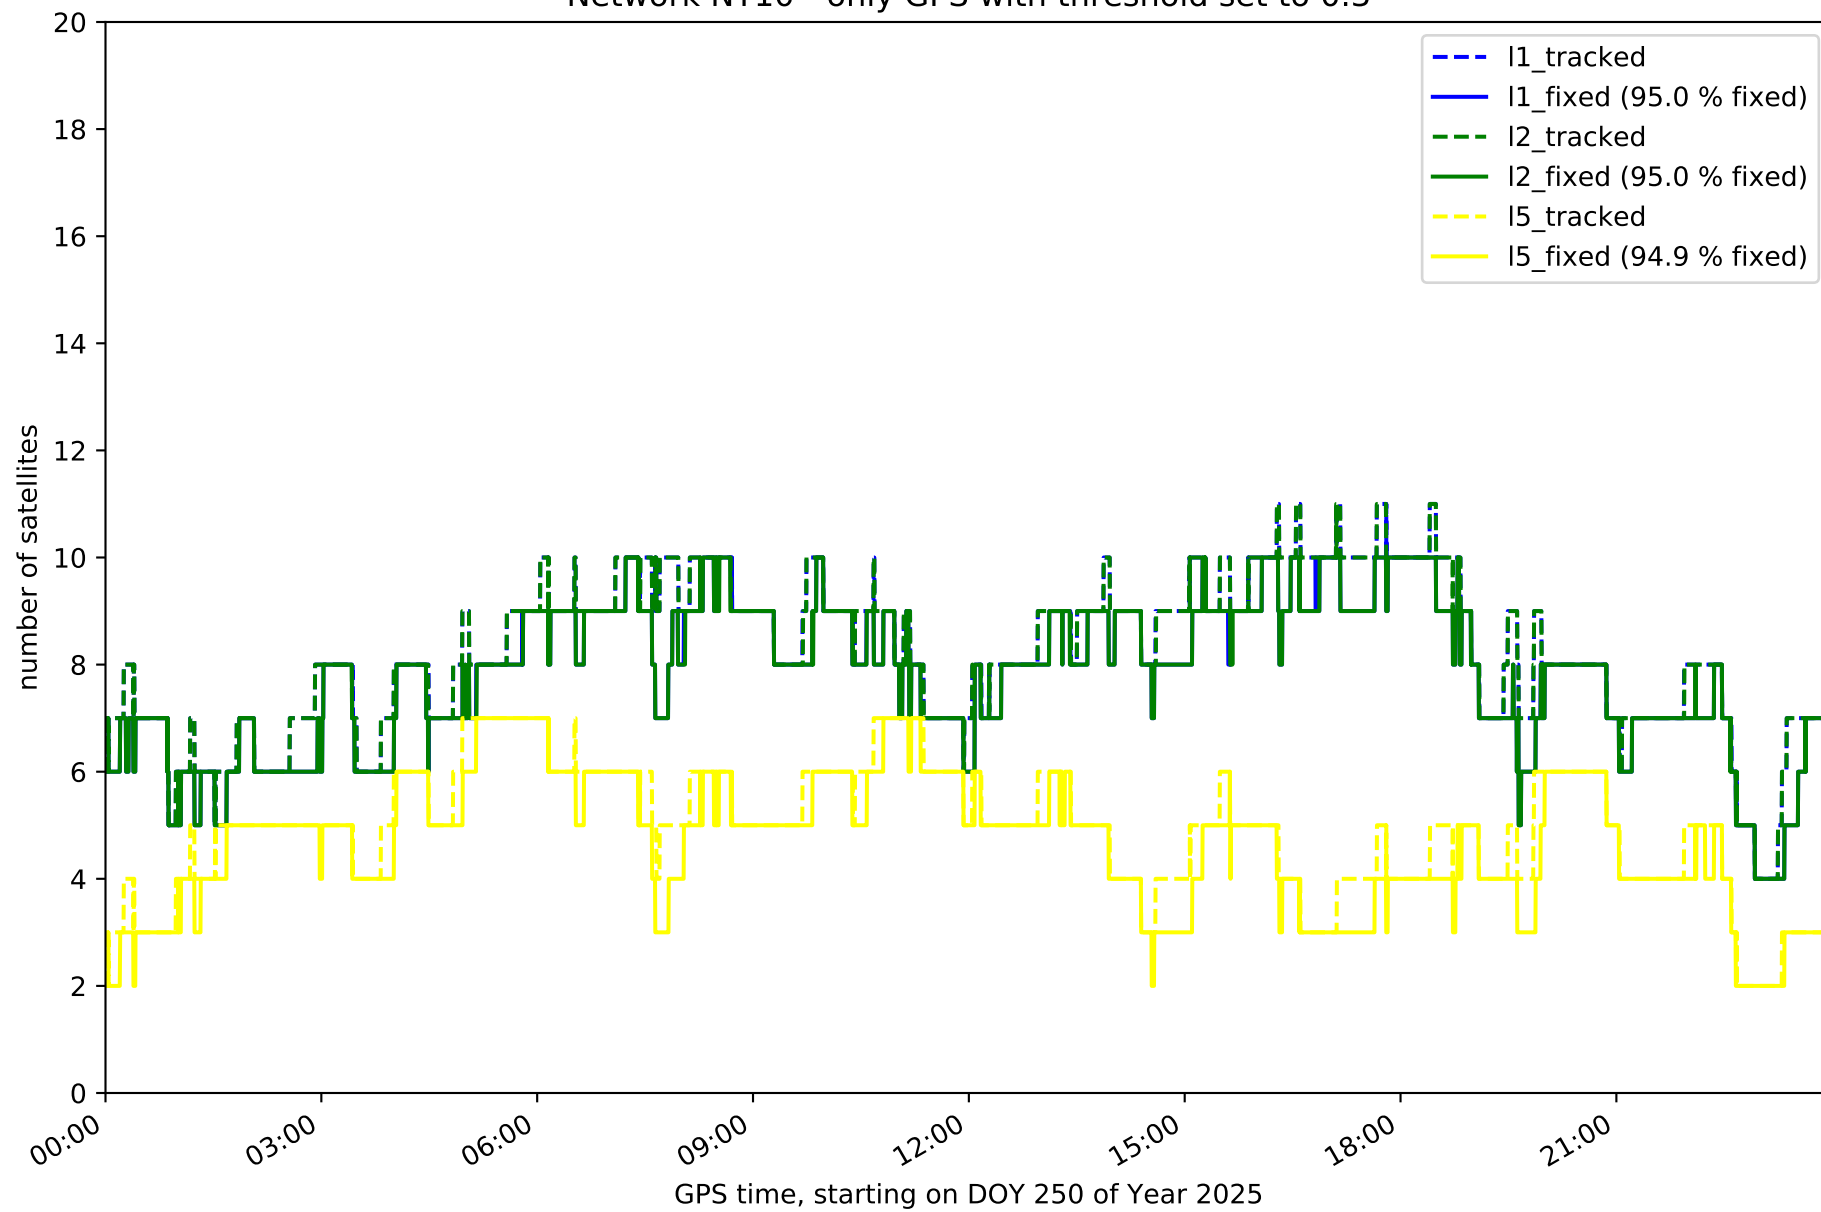


Network NT10 - only GLONASS with threshold set to 0.3

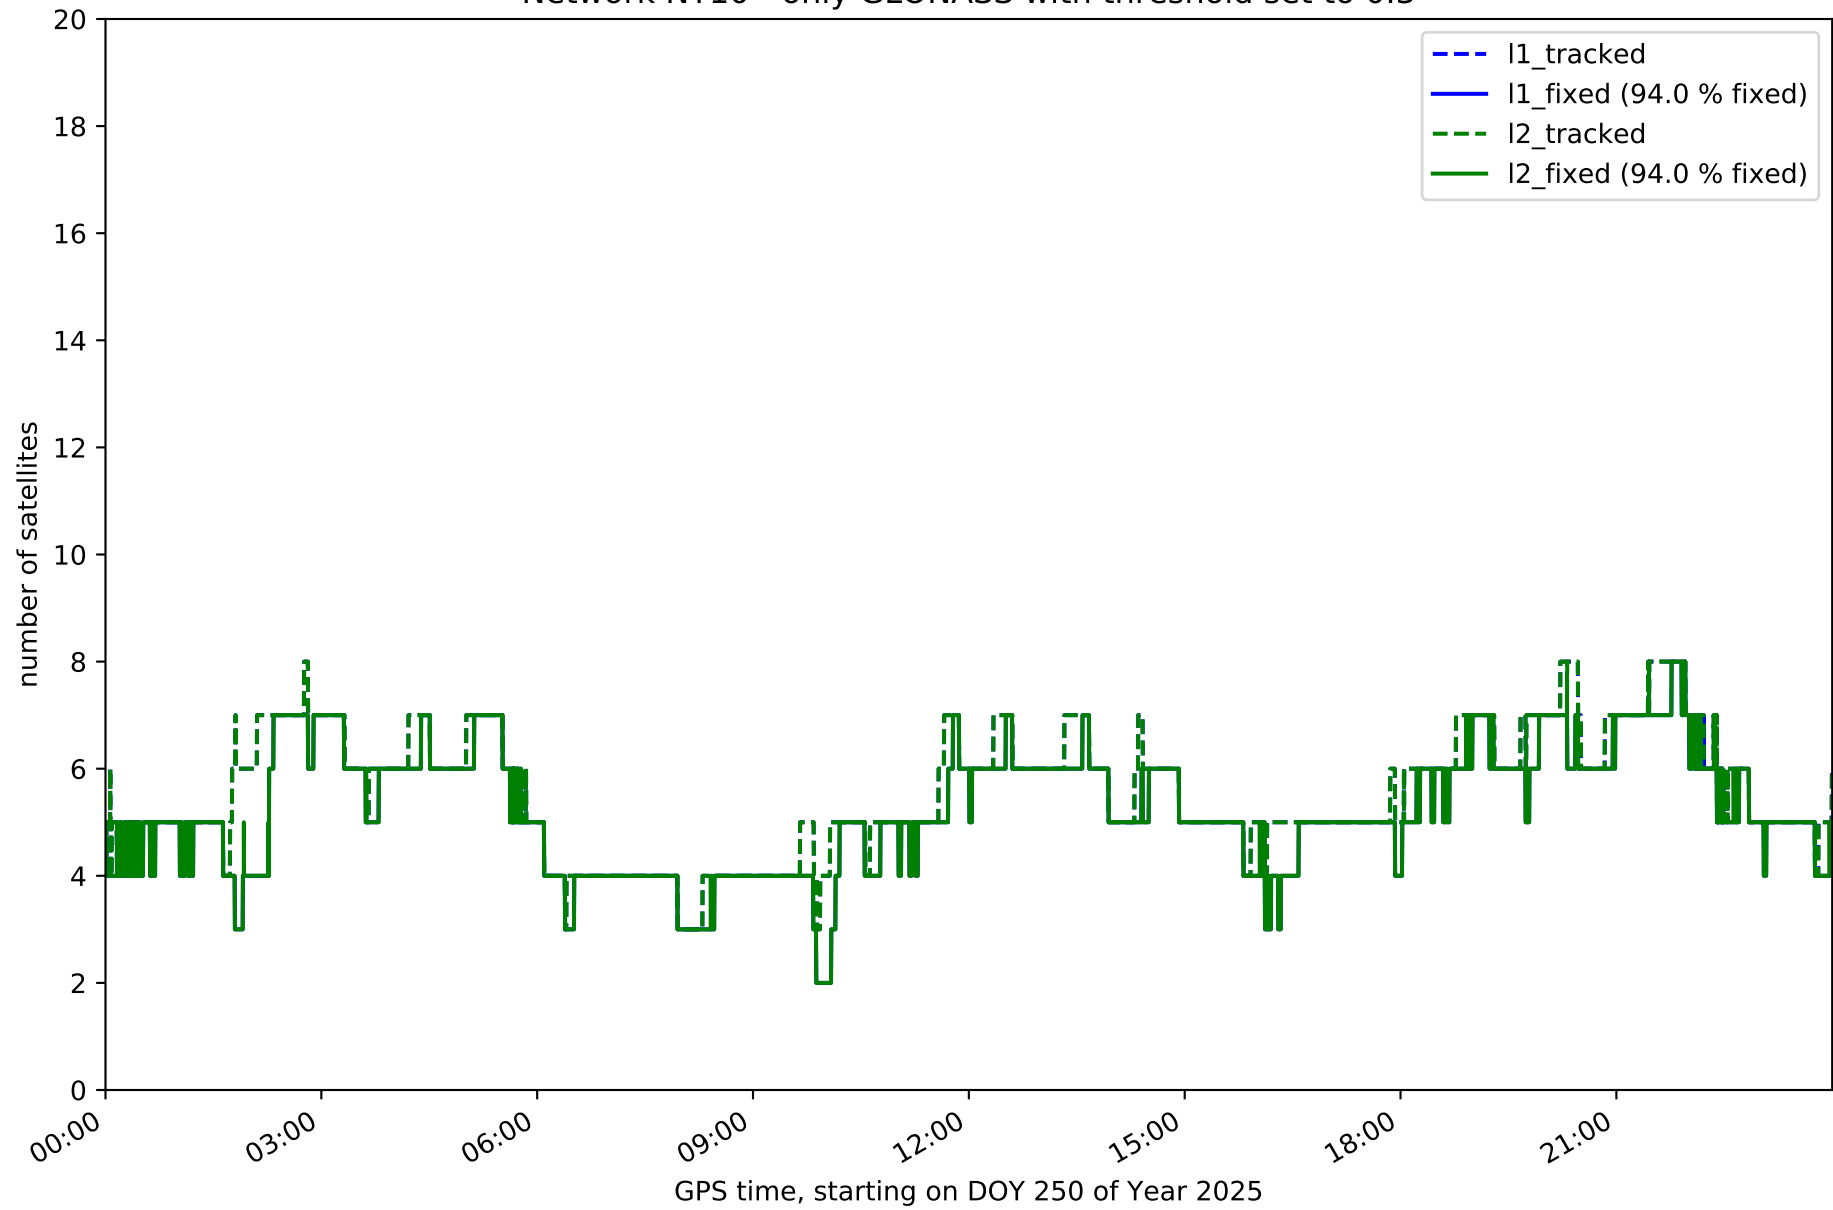


Network NT10 - only BDS with threshold set to 0.3

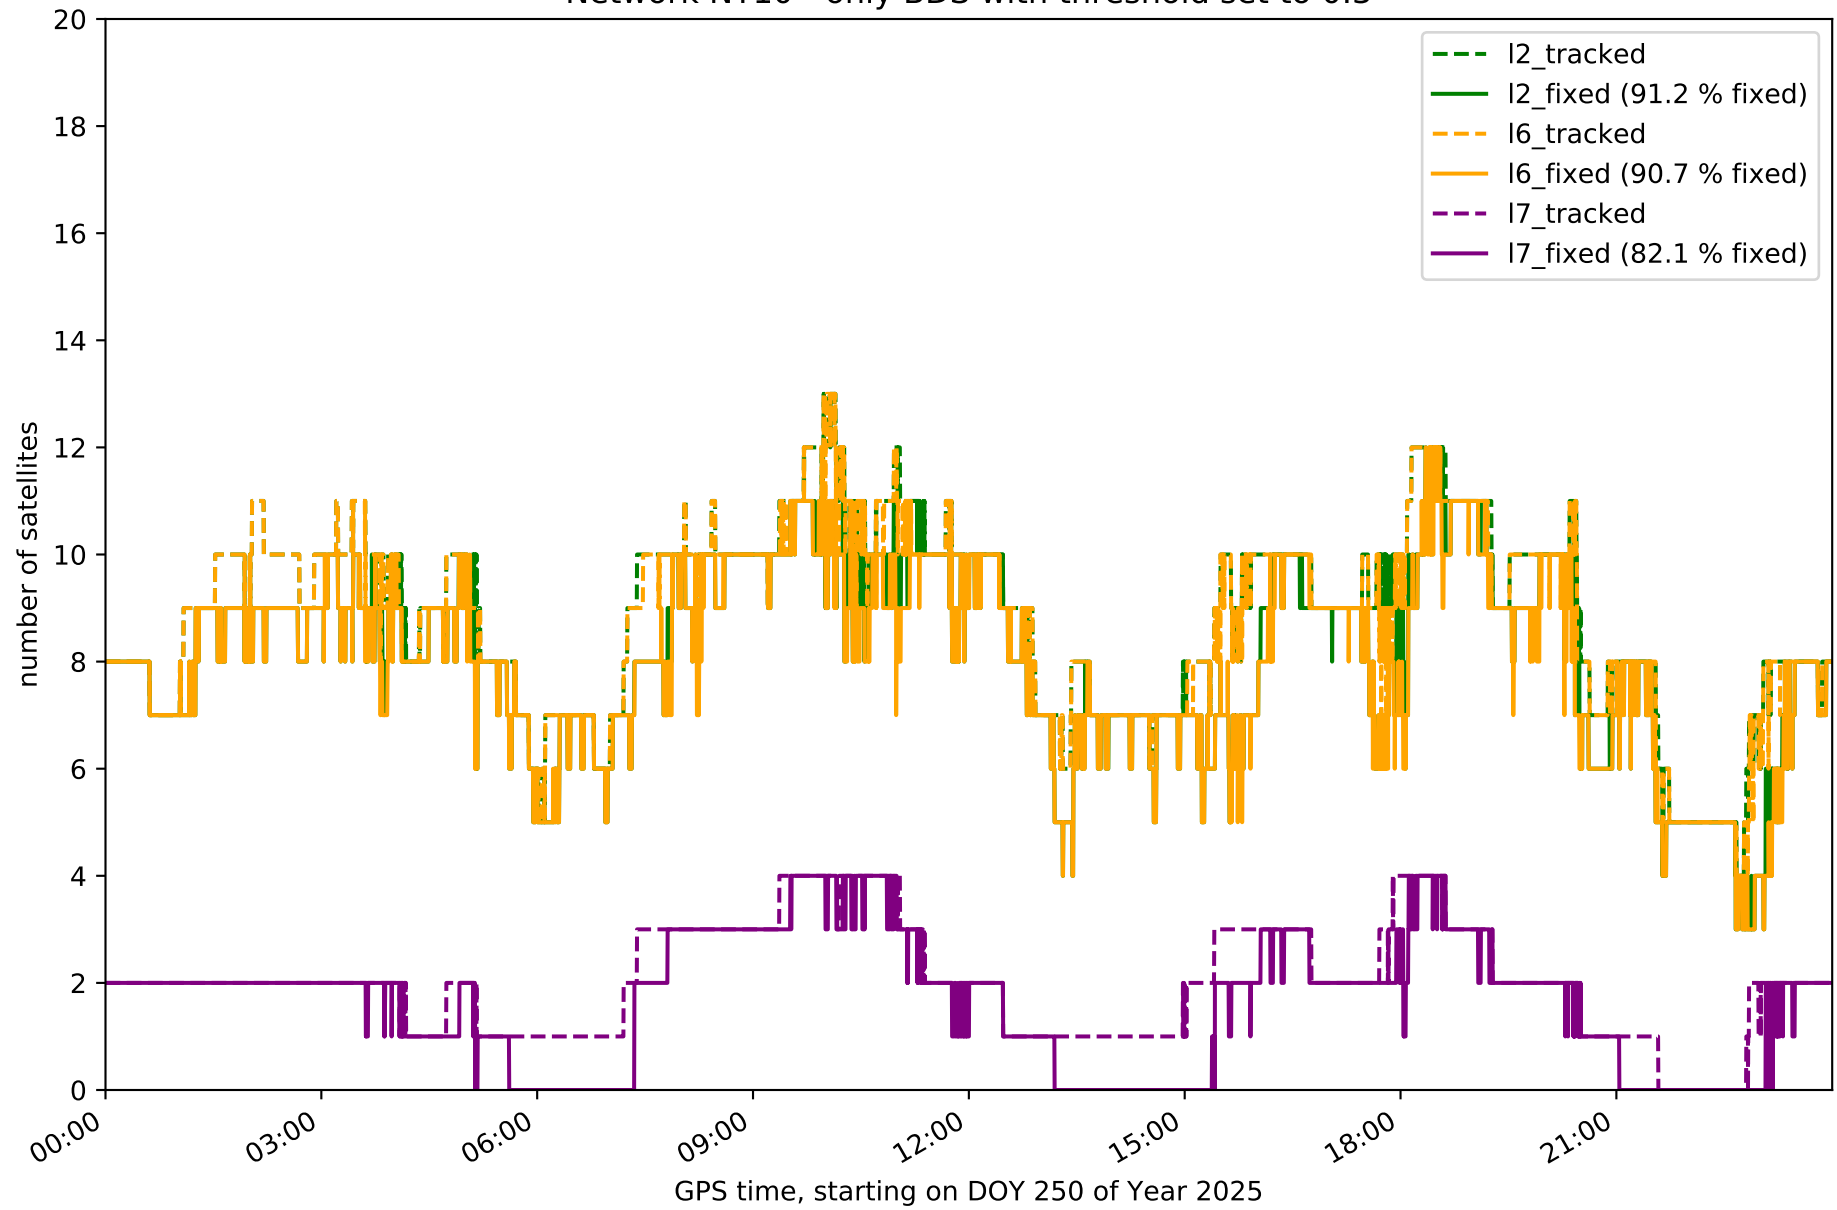


Network NT10 - only Galileo with threshold set to 0.3

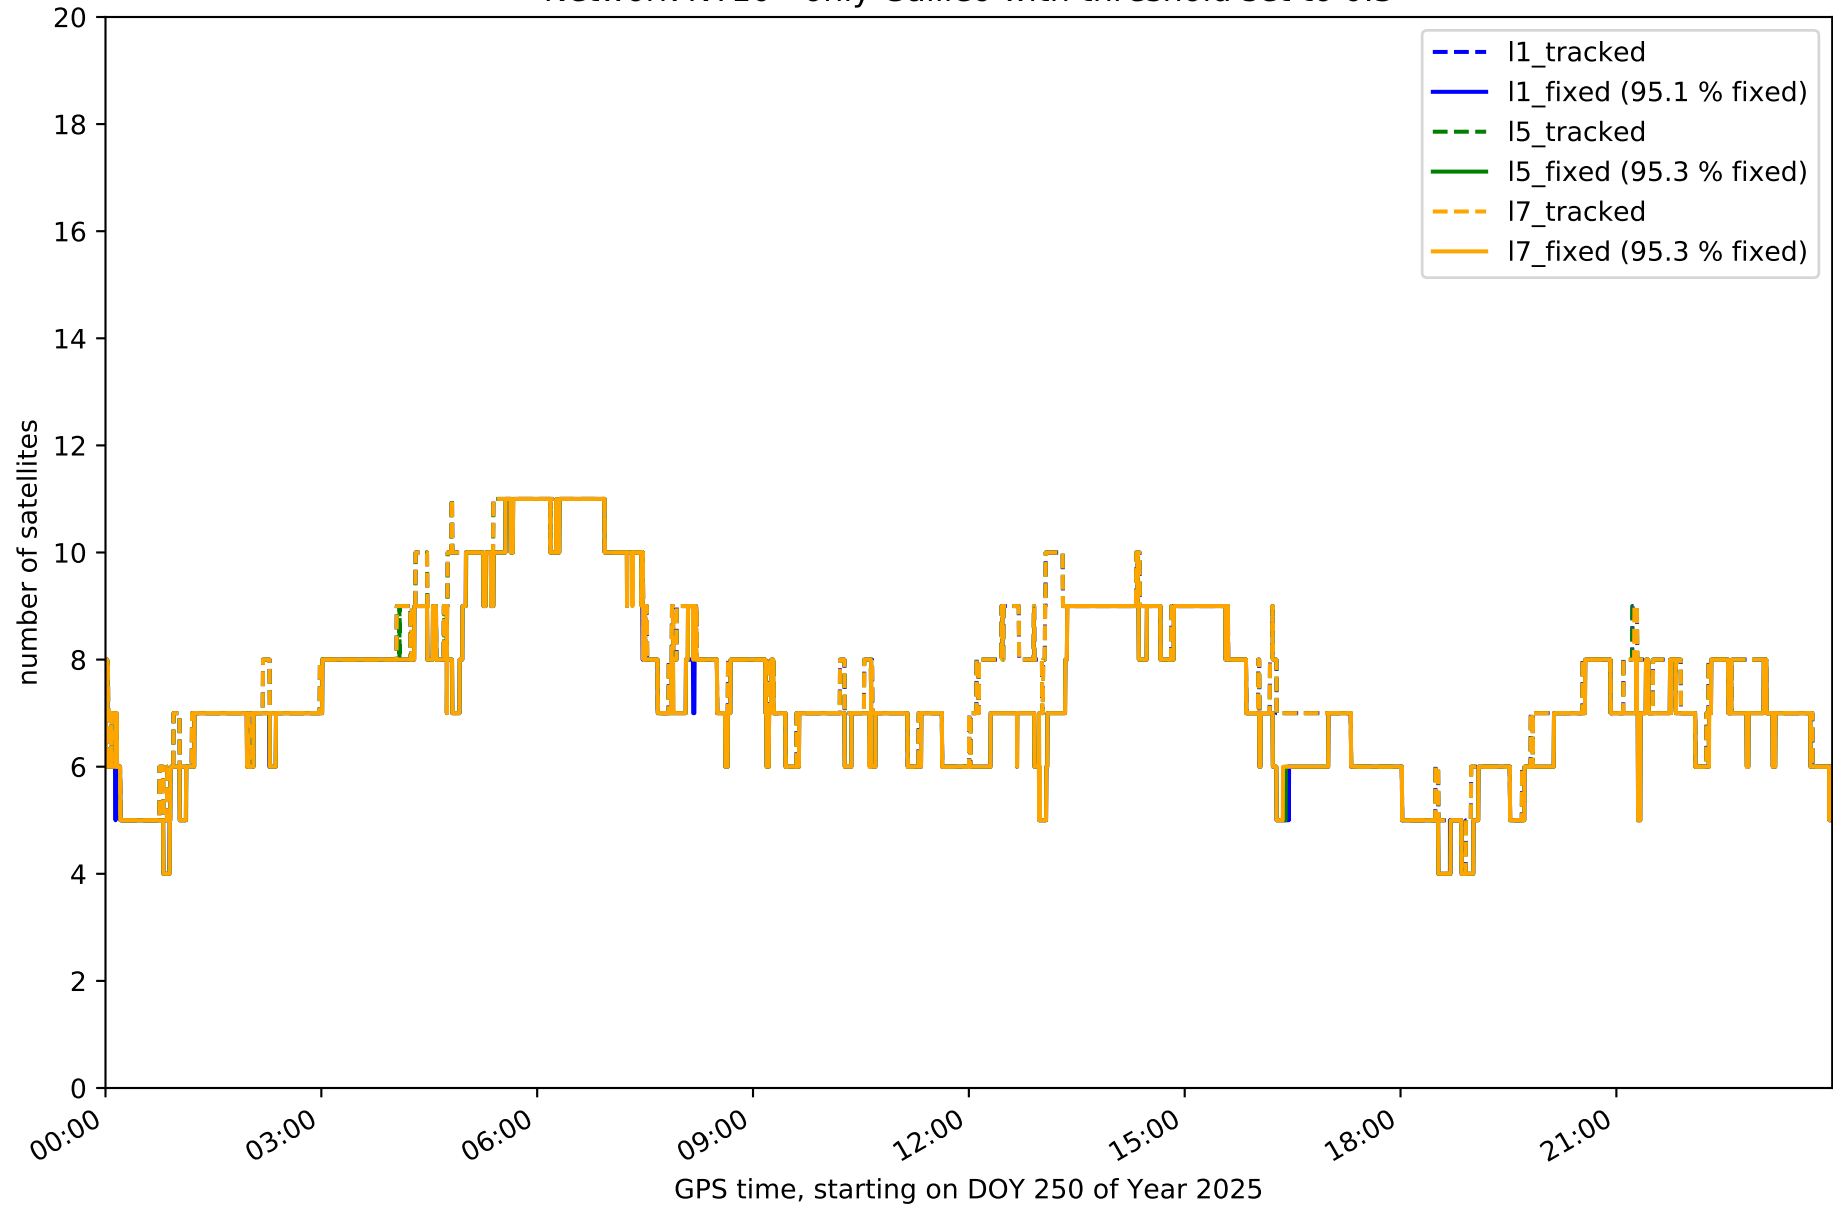


Station BCL1 in network NT10

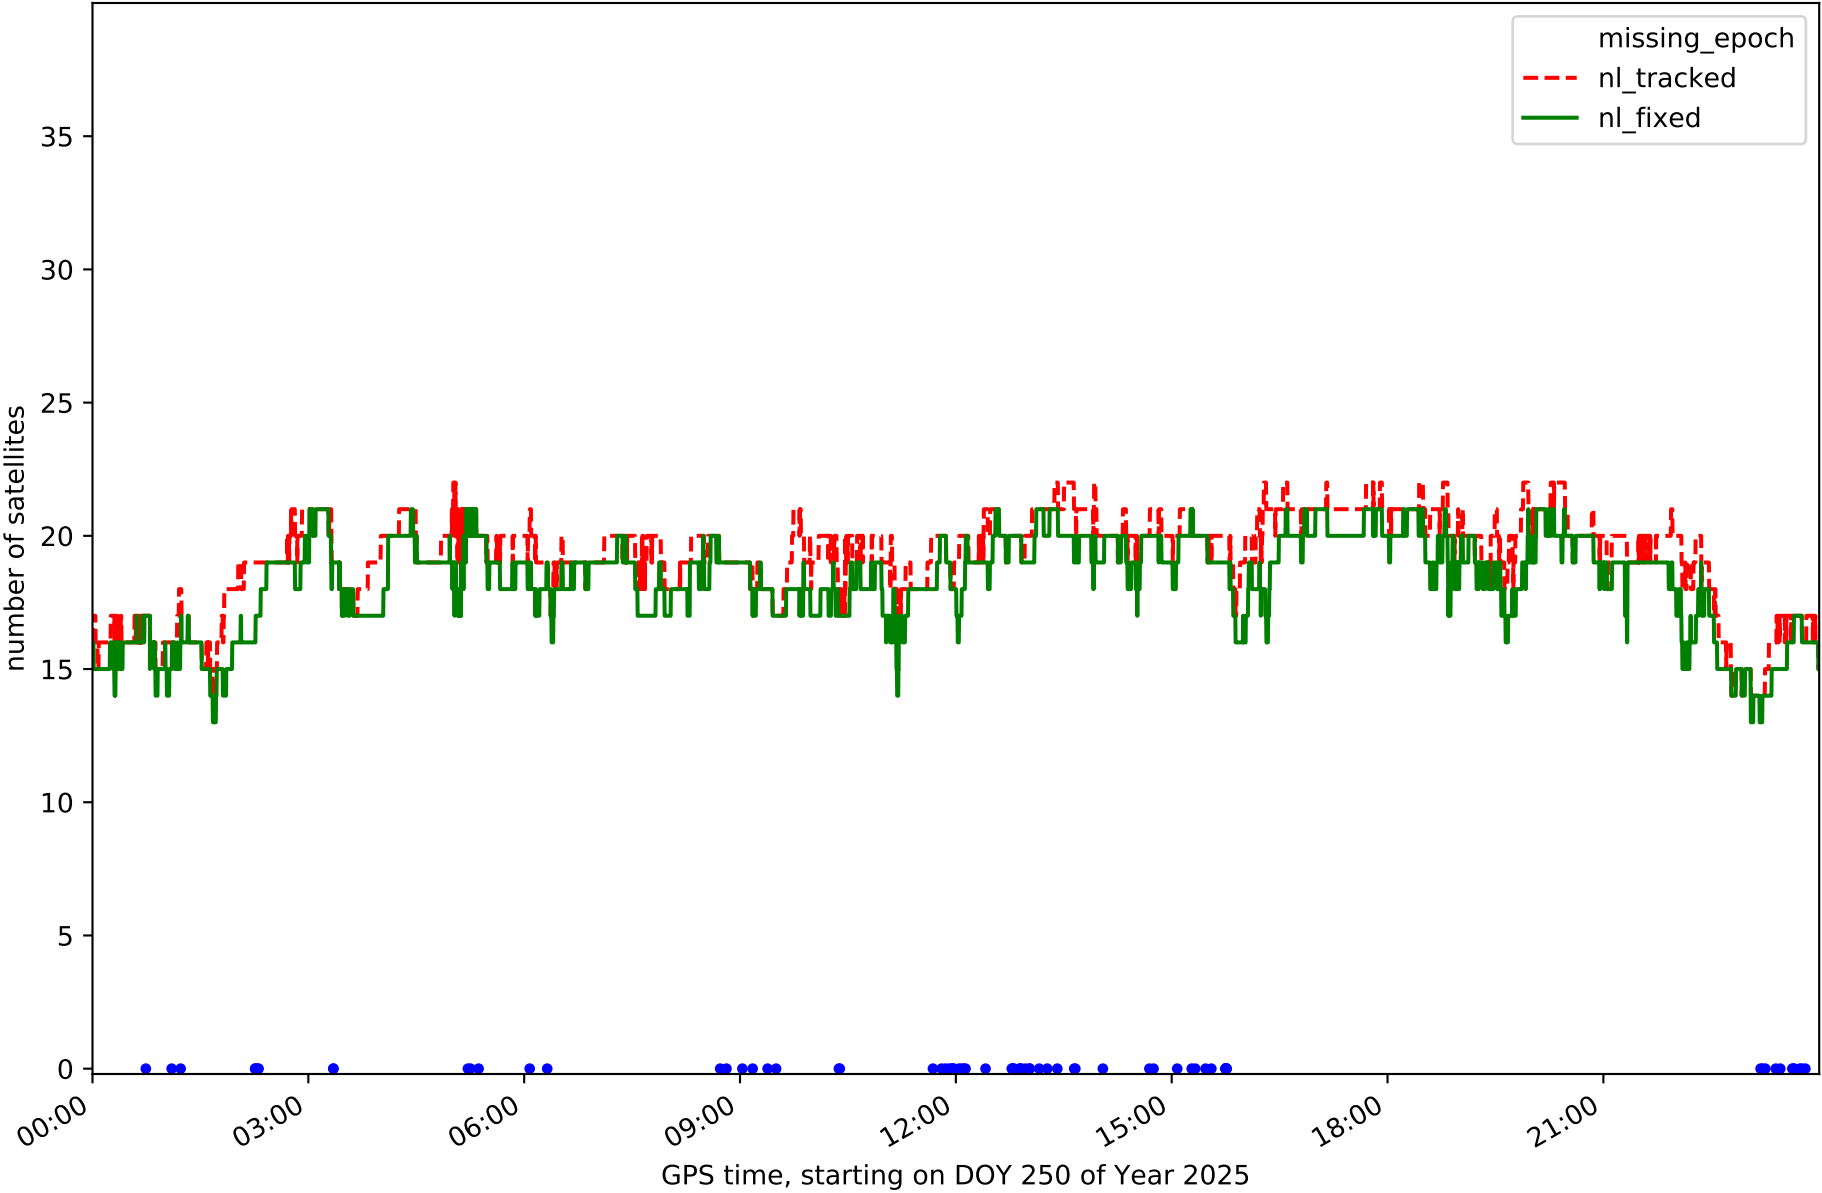


Station BCLN in network NT10

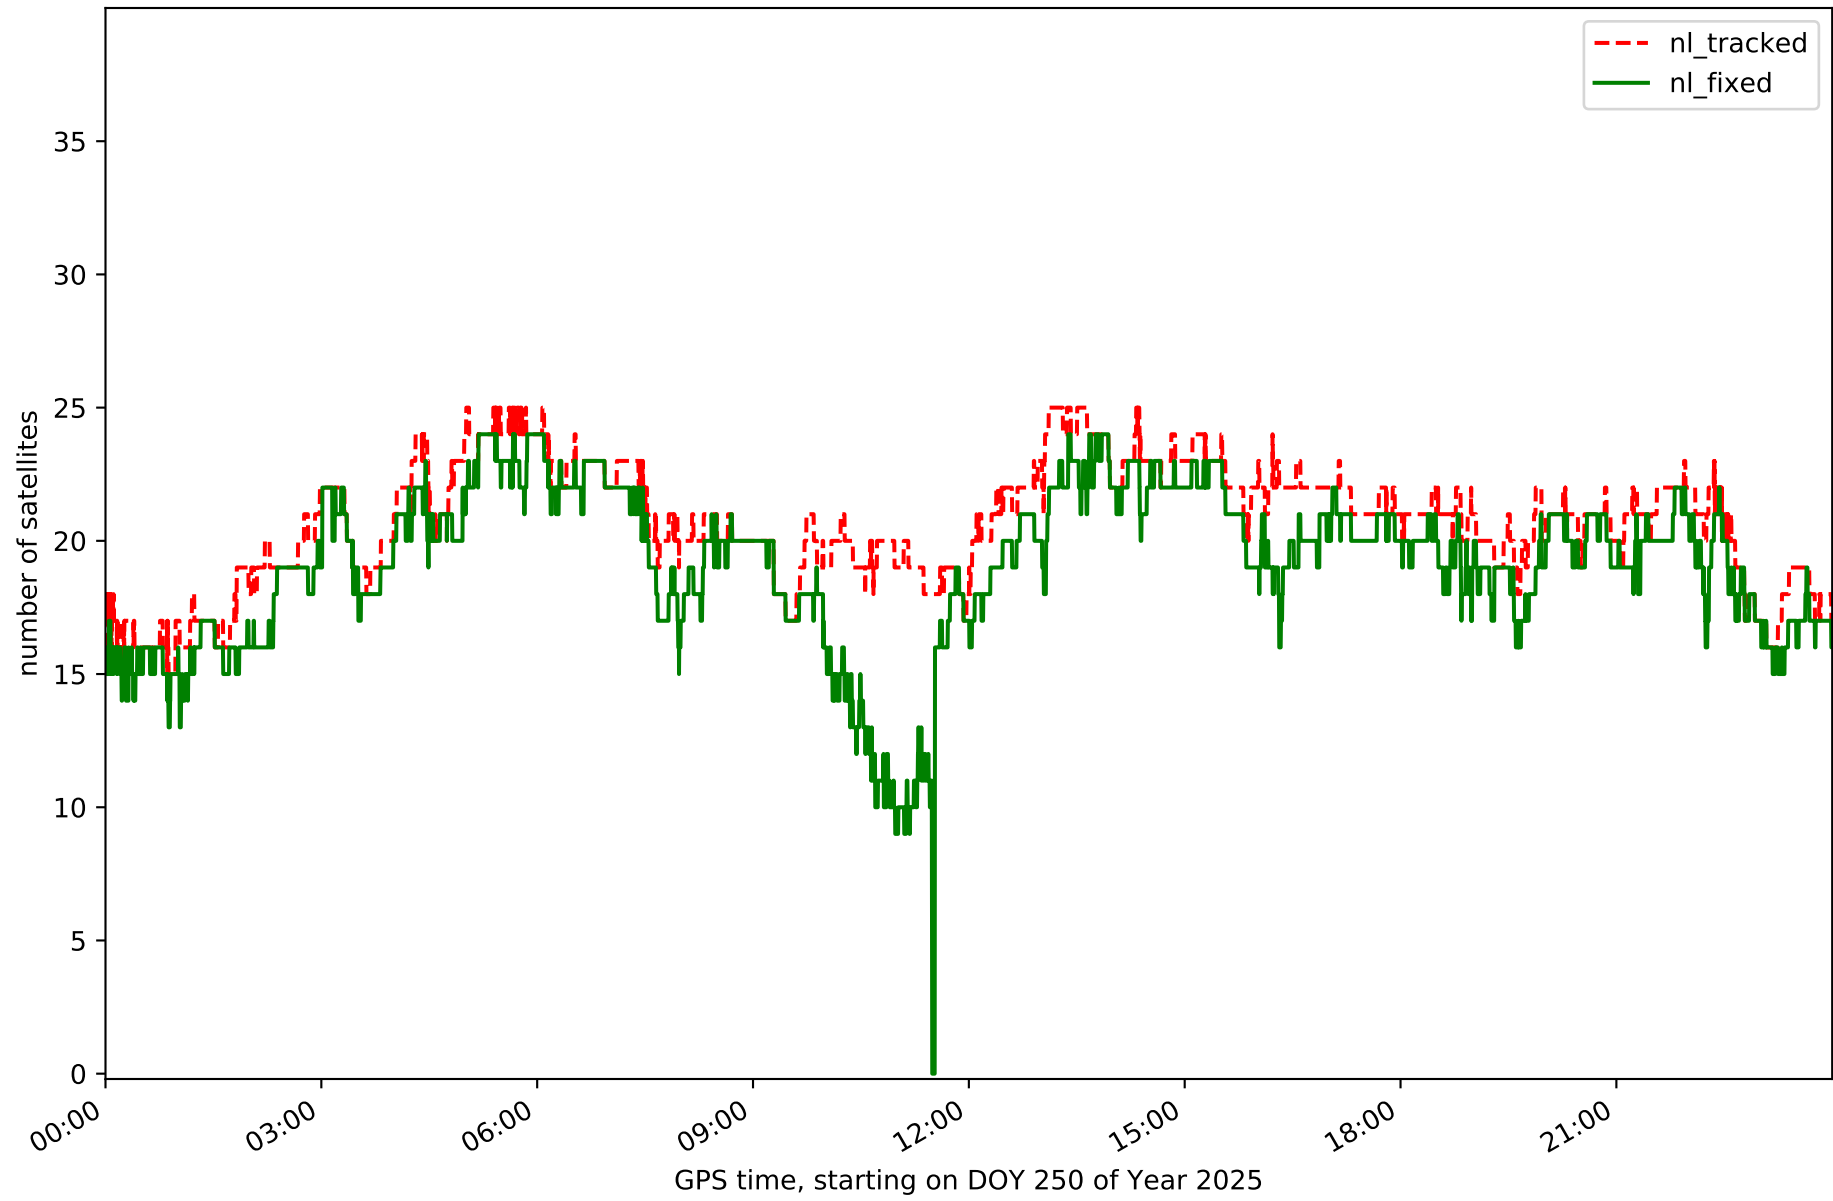

Station BELL in network NT10

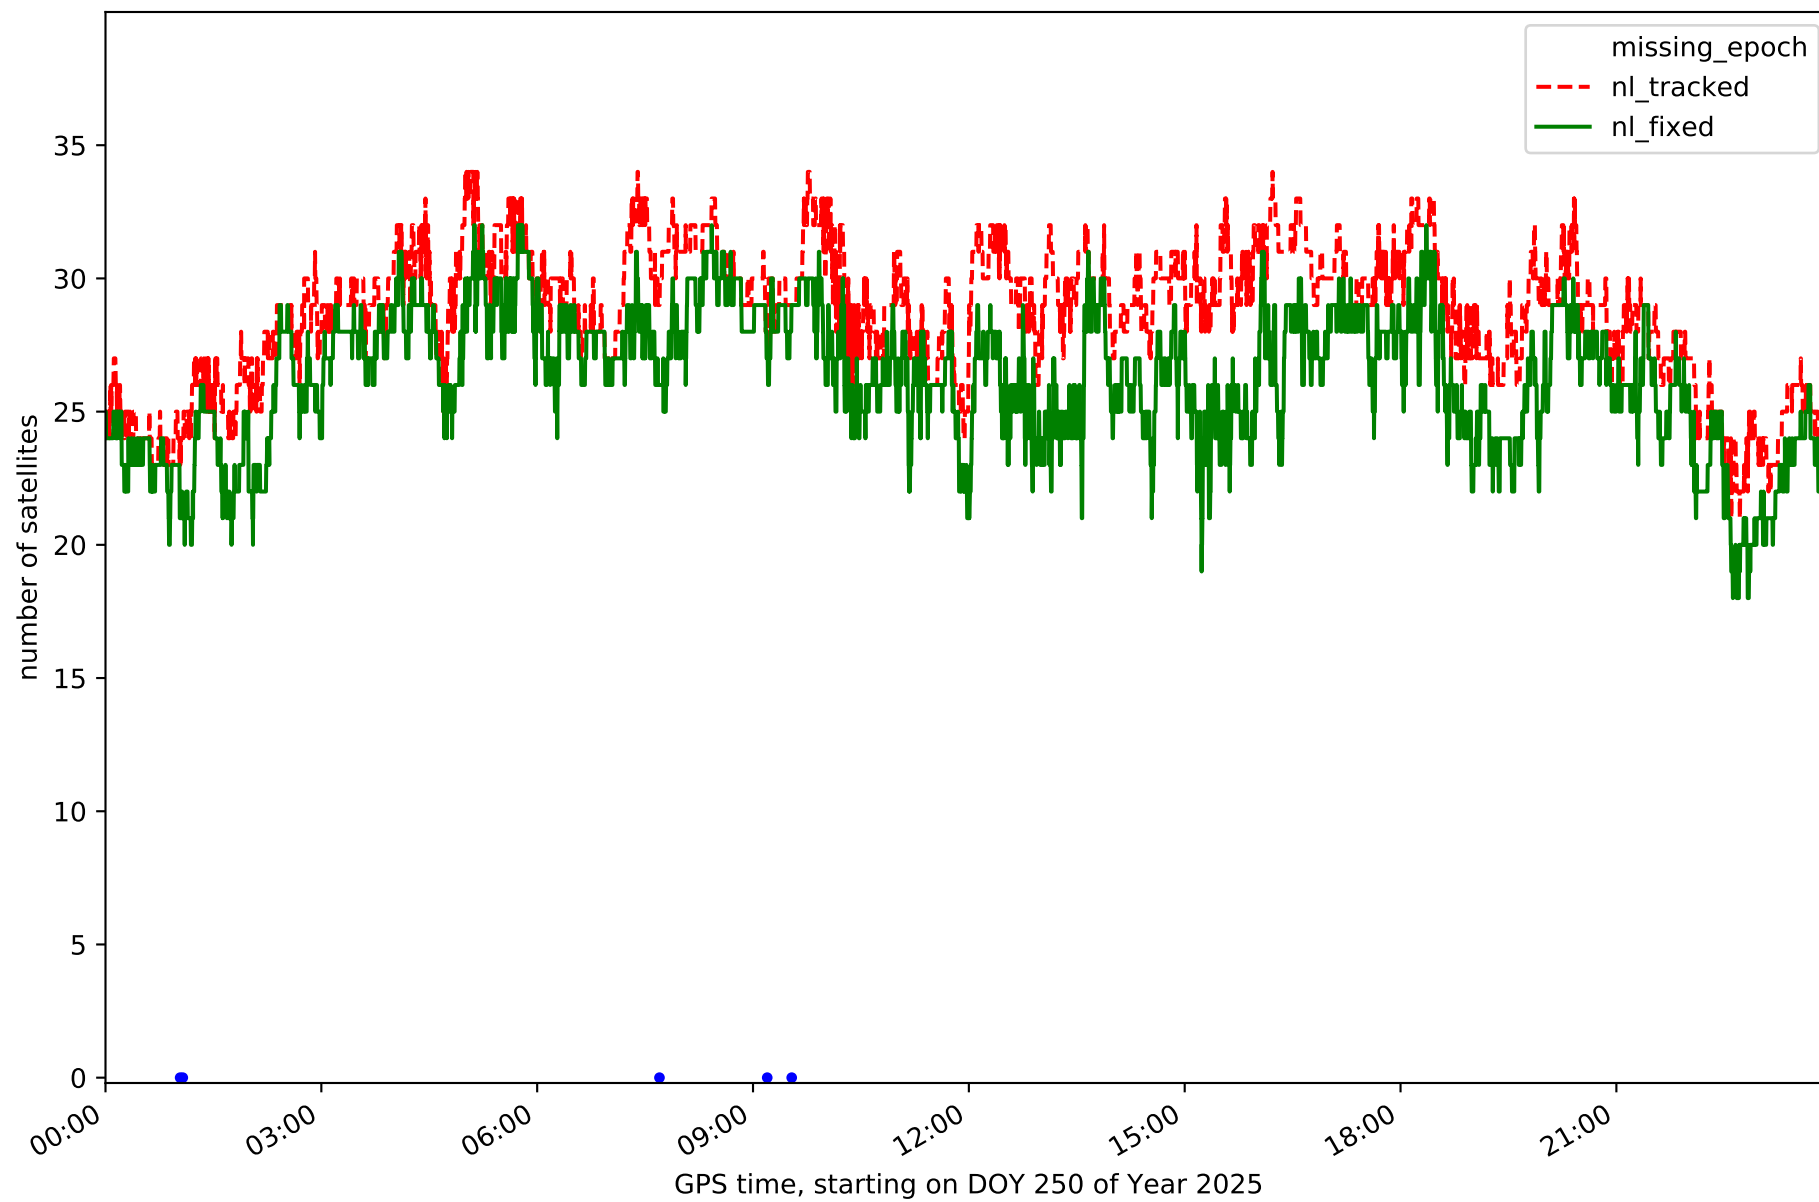


Station BINE in network NT10

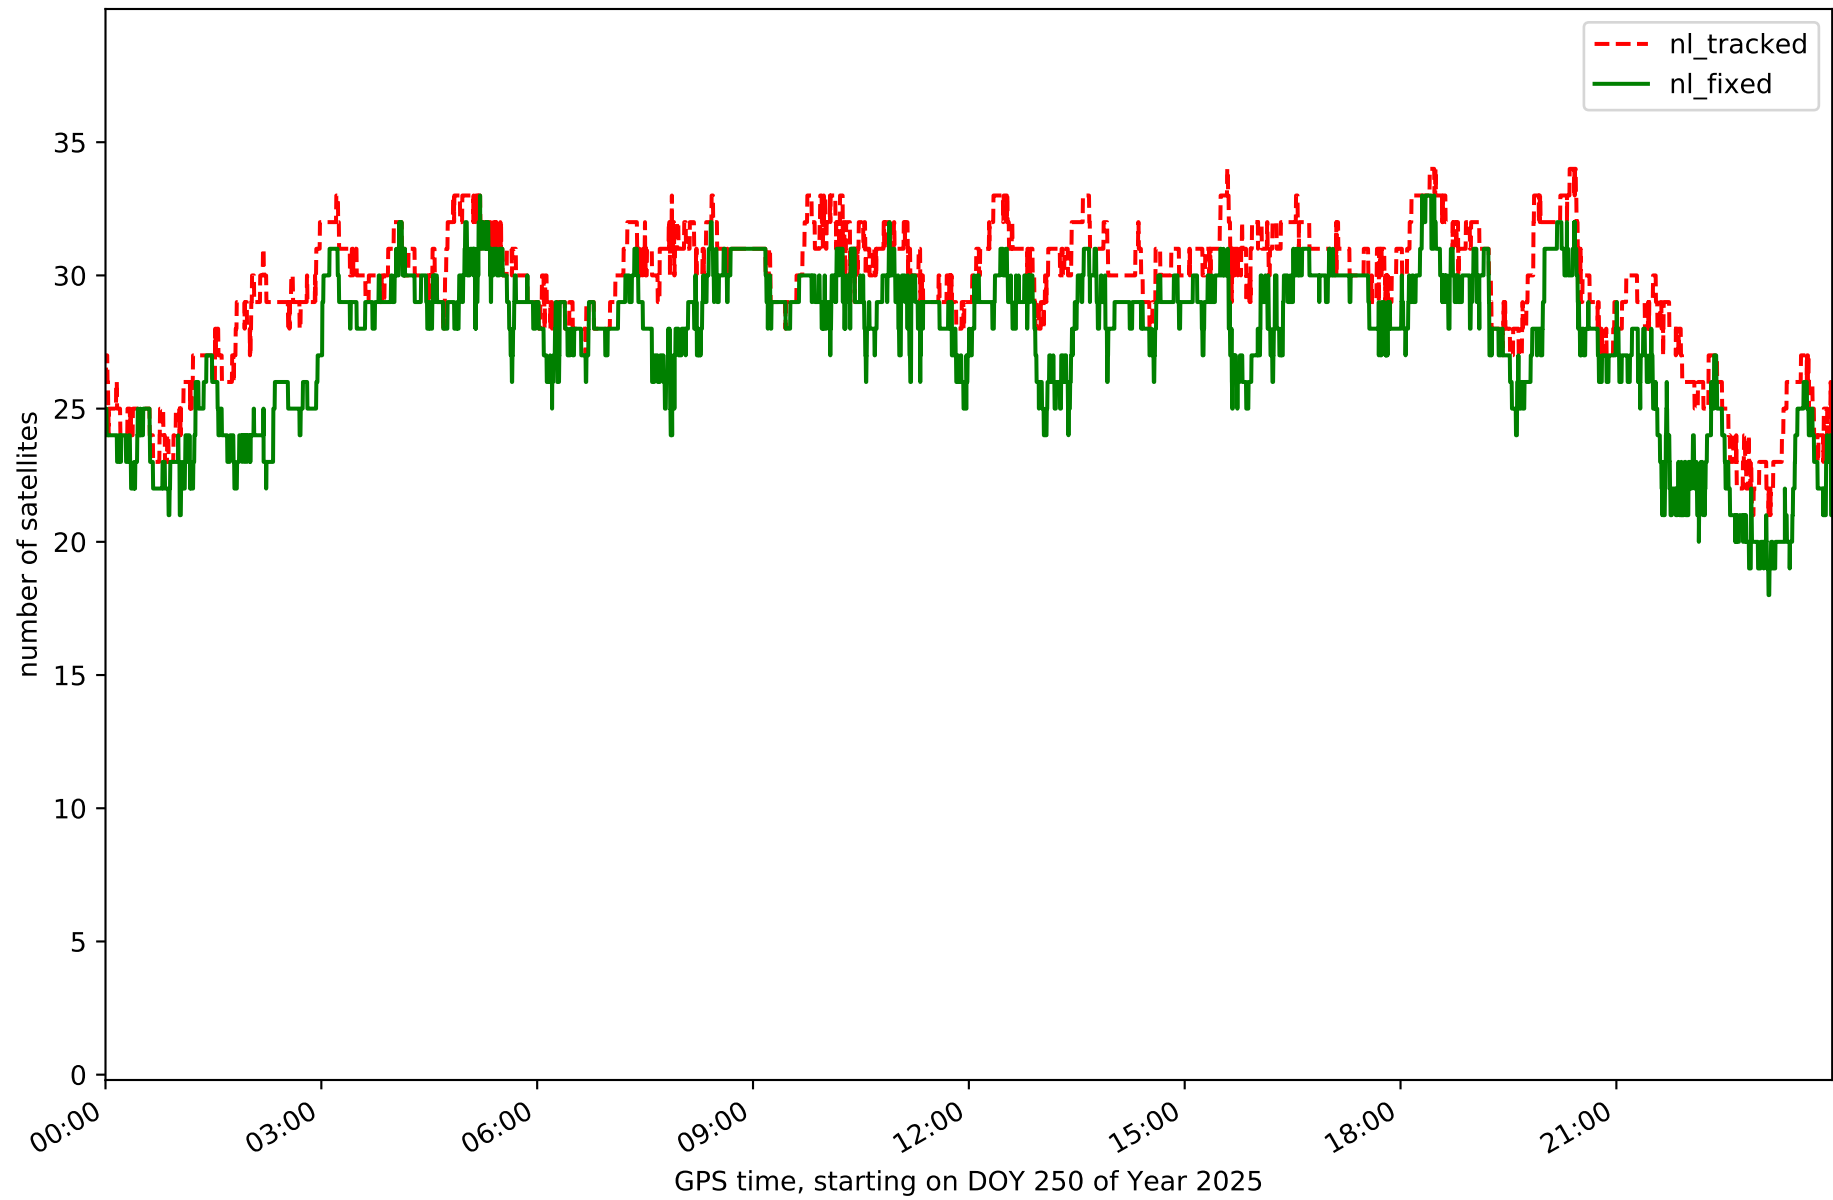


Station CREU in network NT10




Station EBRE in network NT10

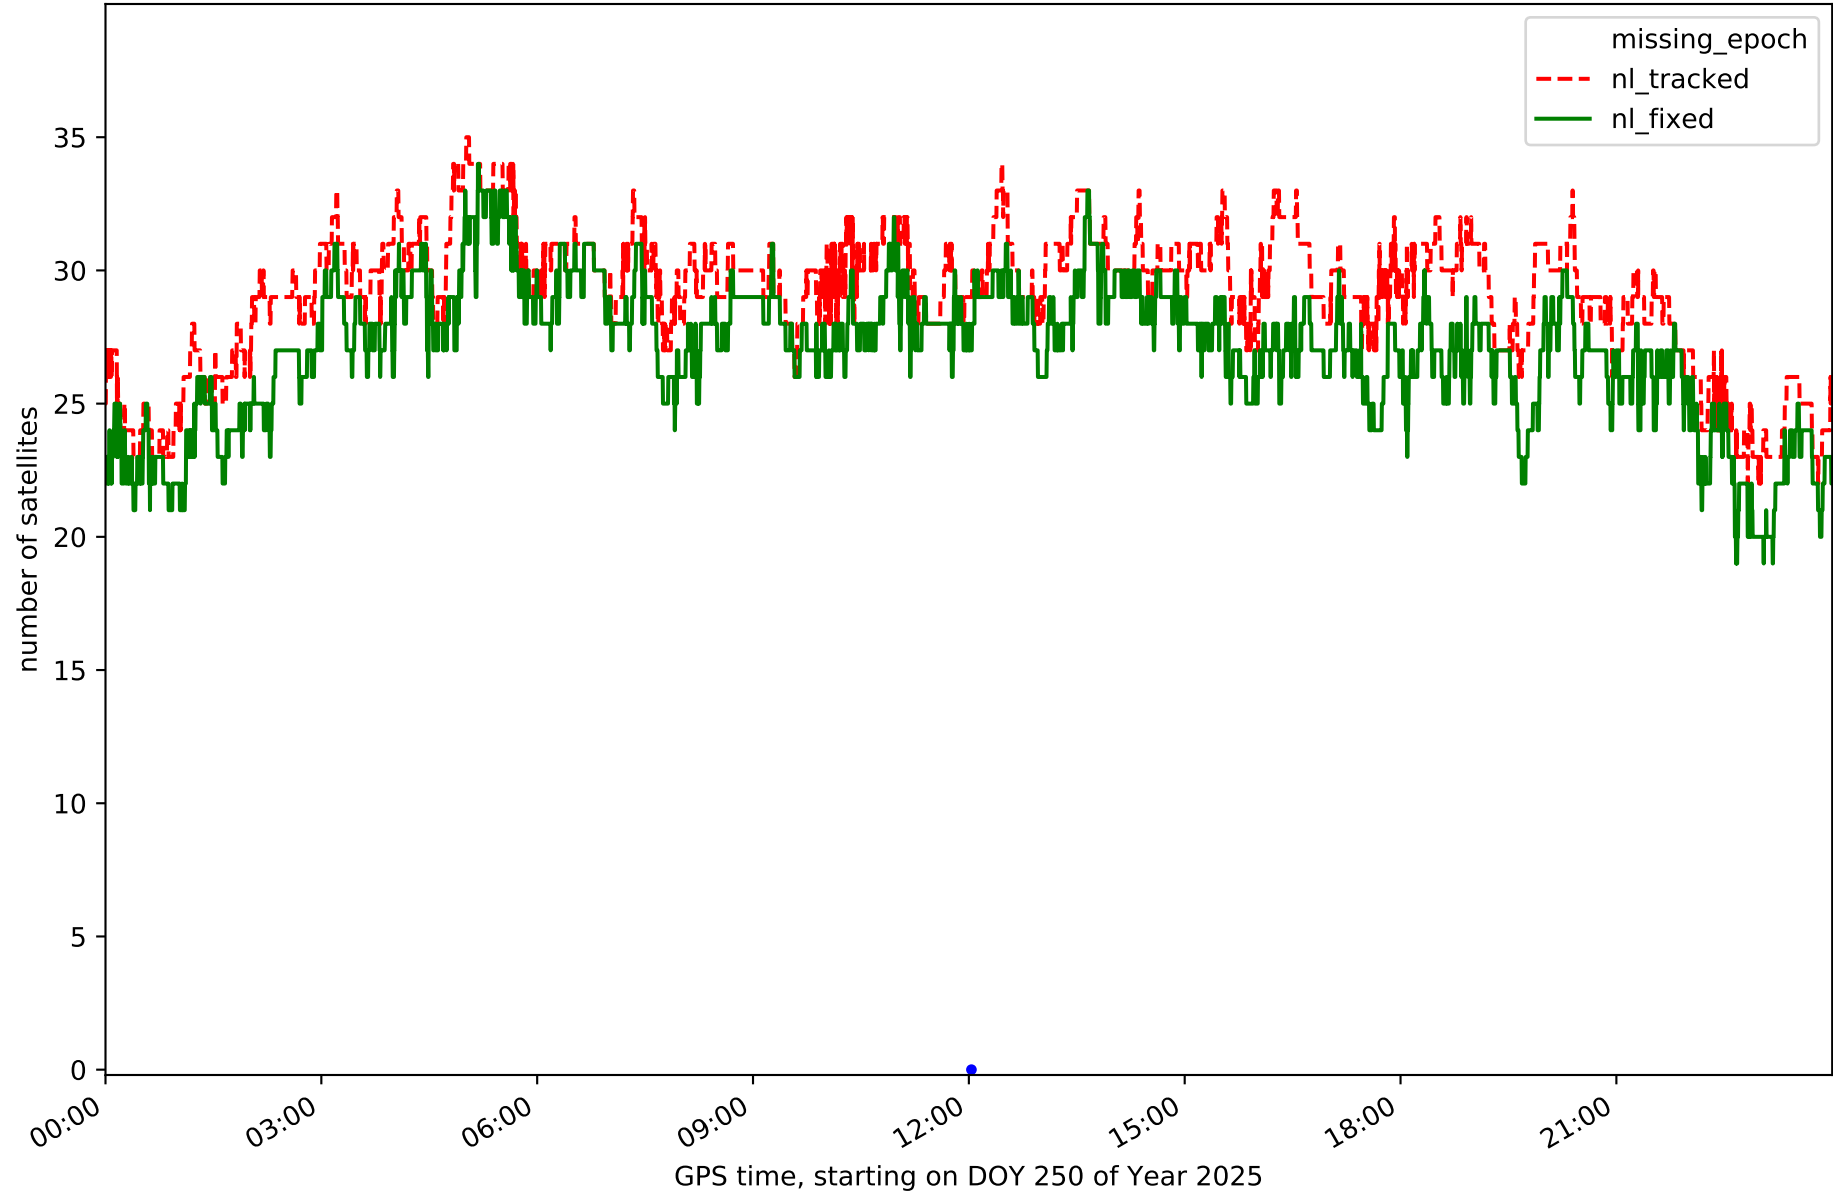


Station EBRO in network NT10

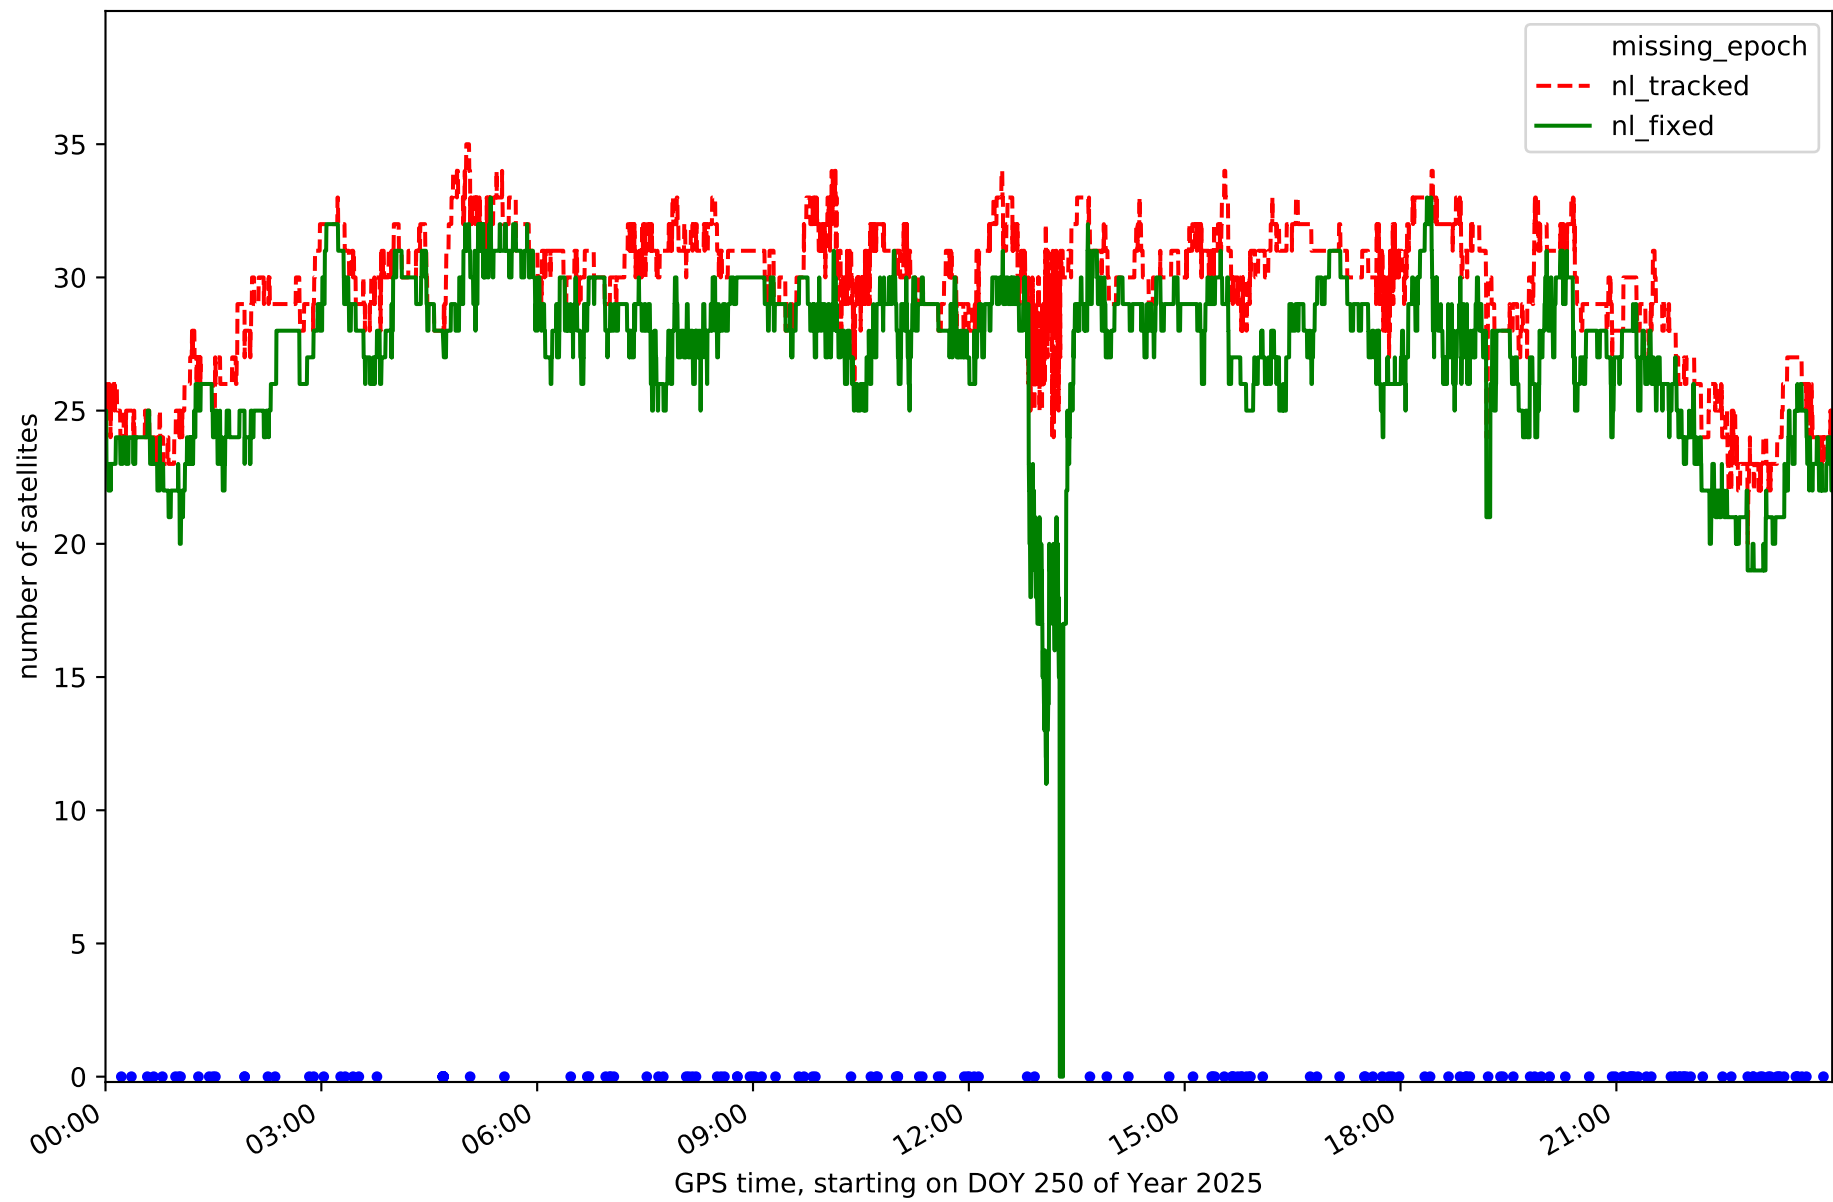


Station ESCO in network NT10

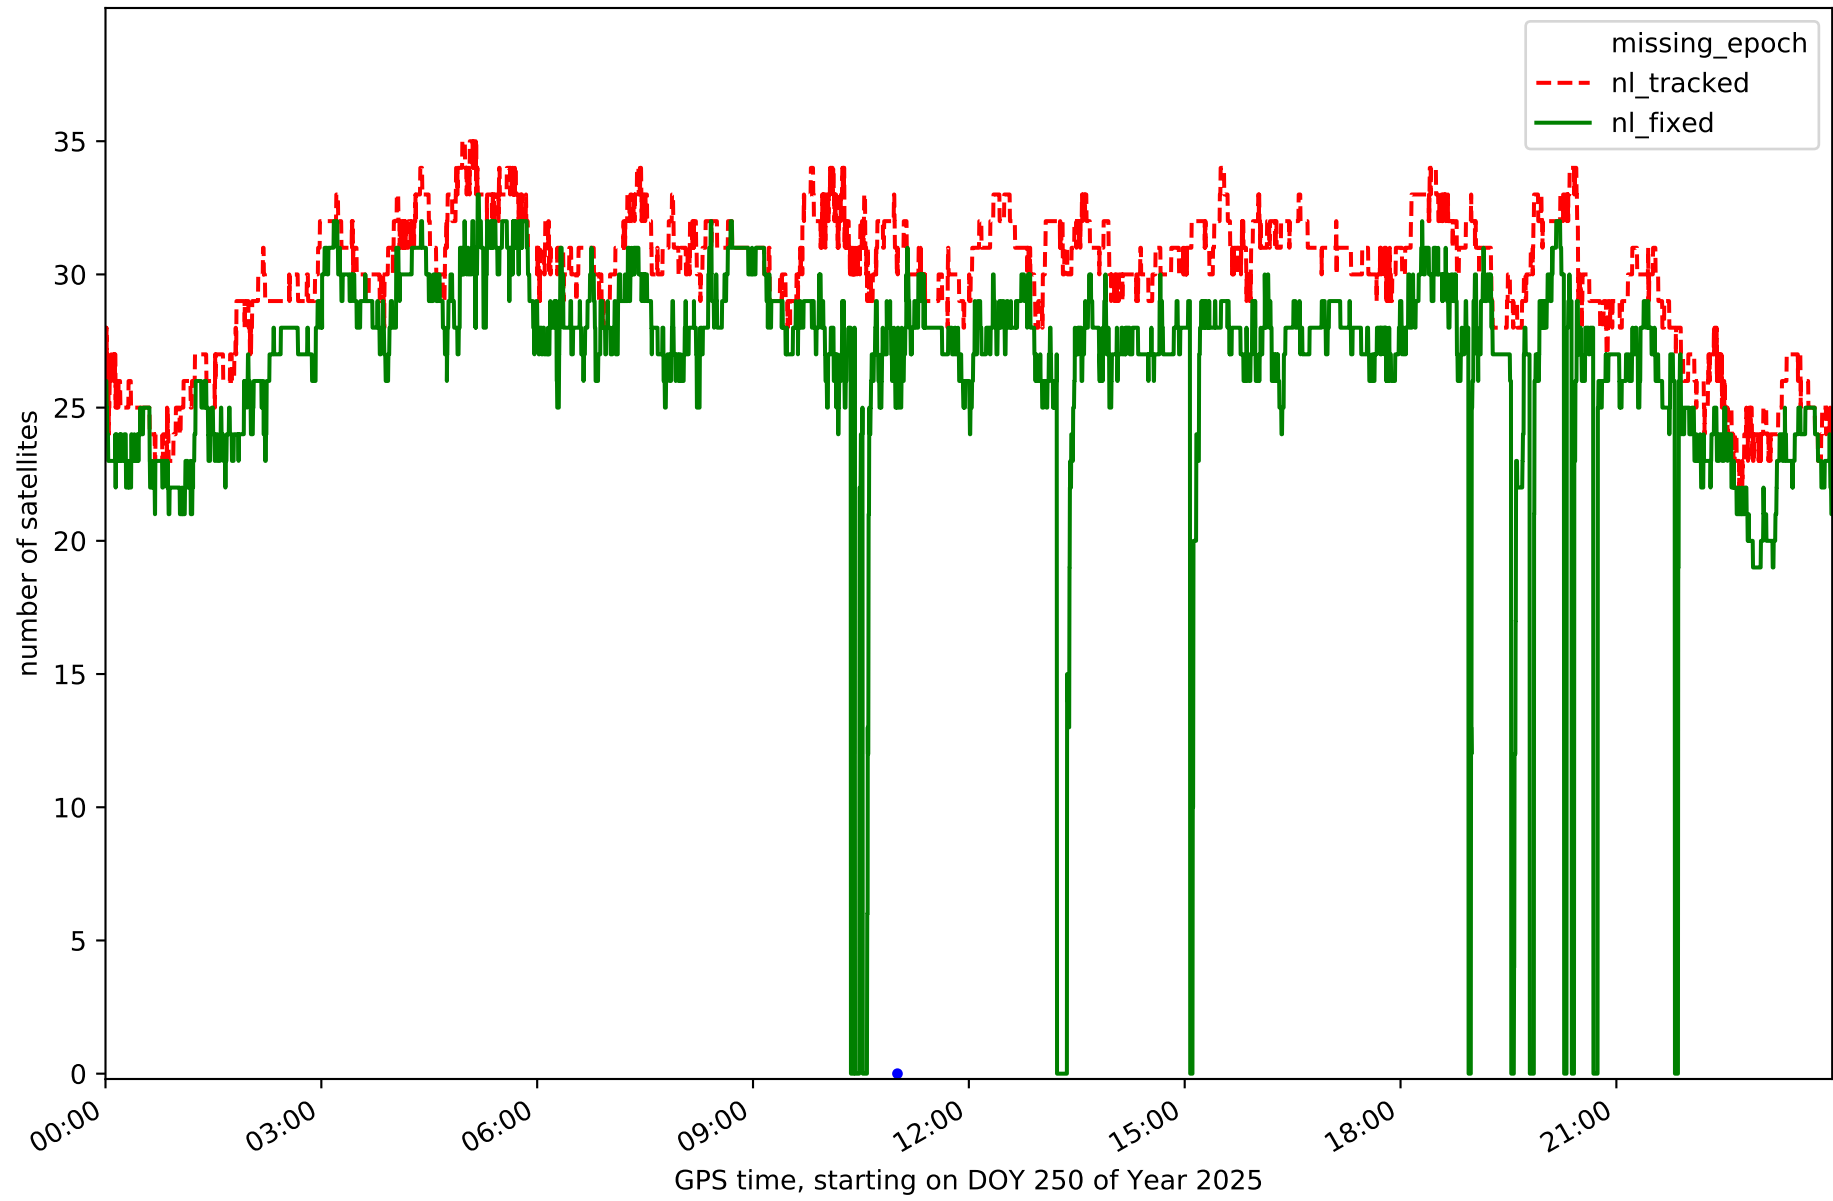


Station GRAU in network NT10

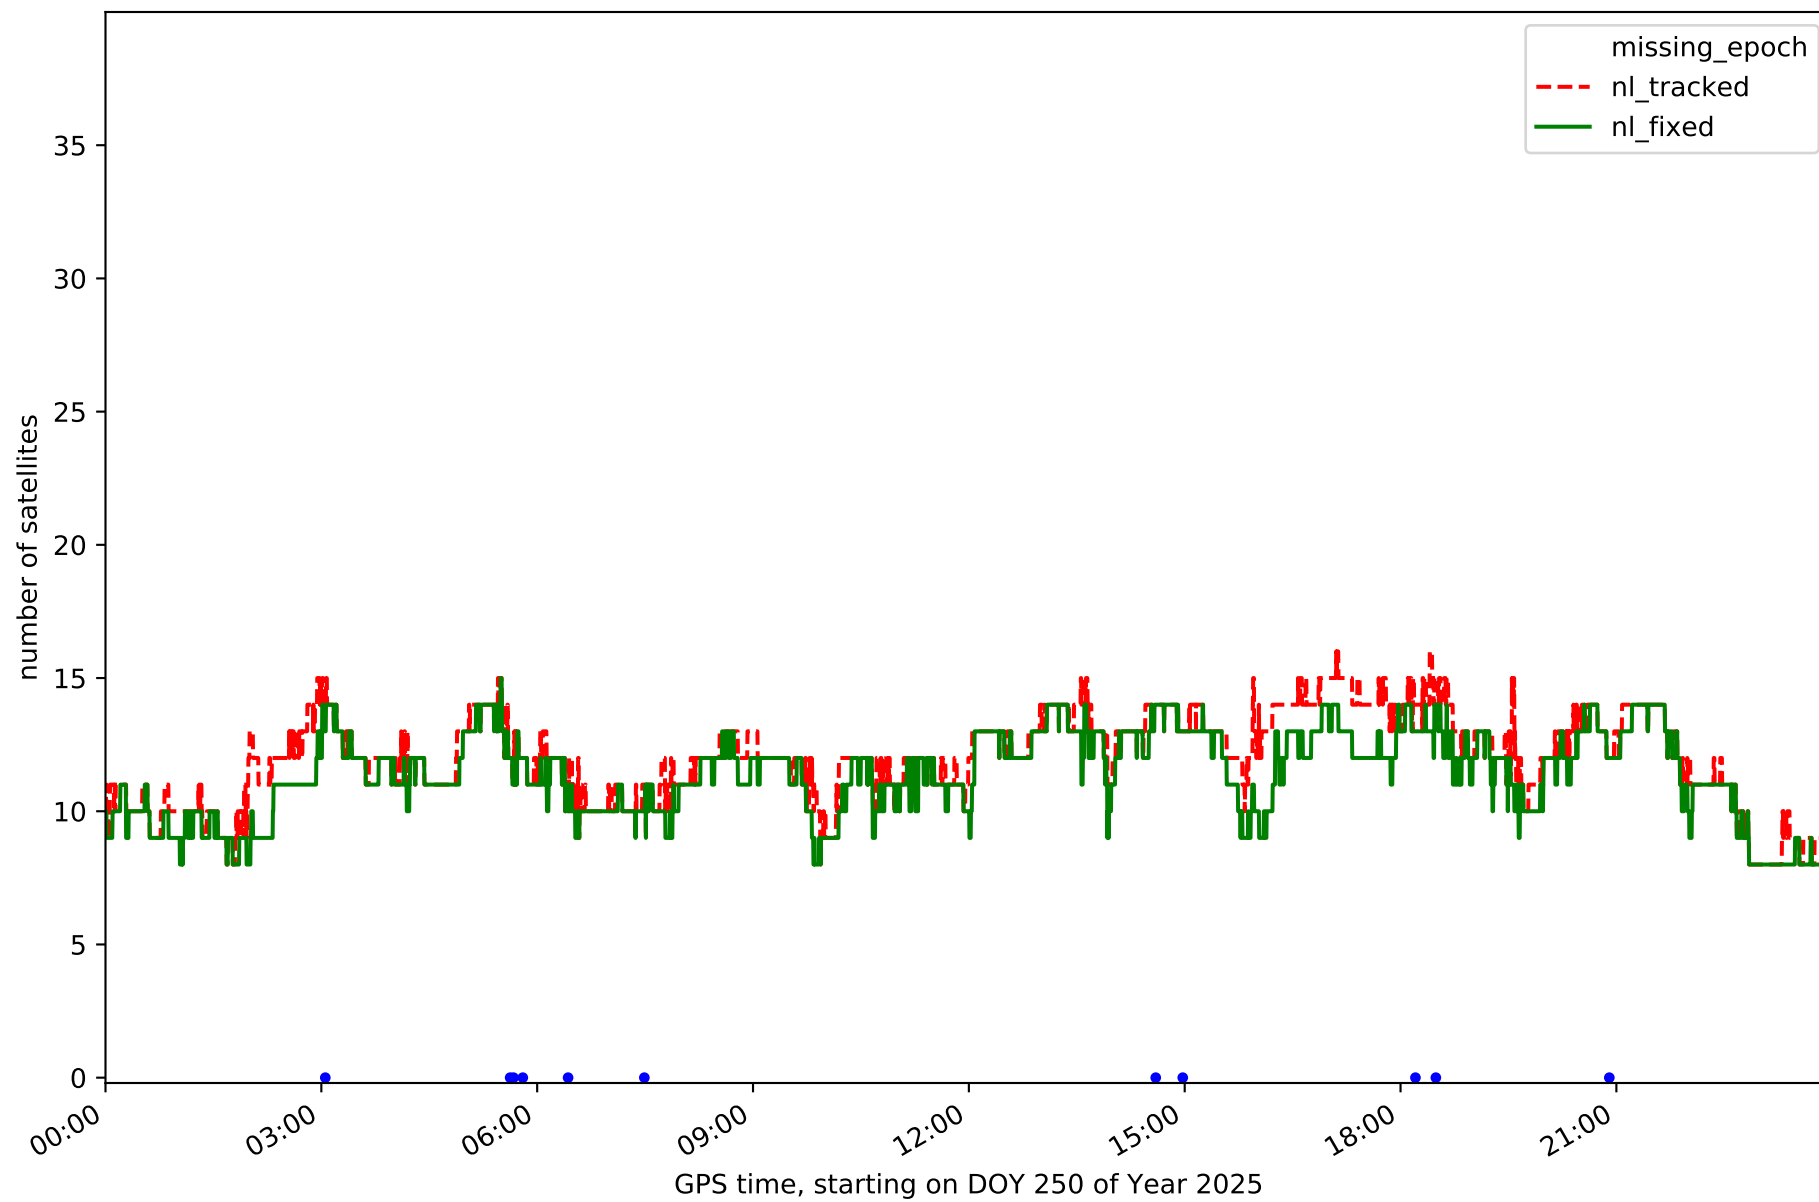


Station MEQU in network NT10

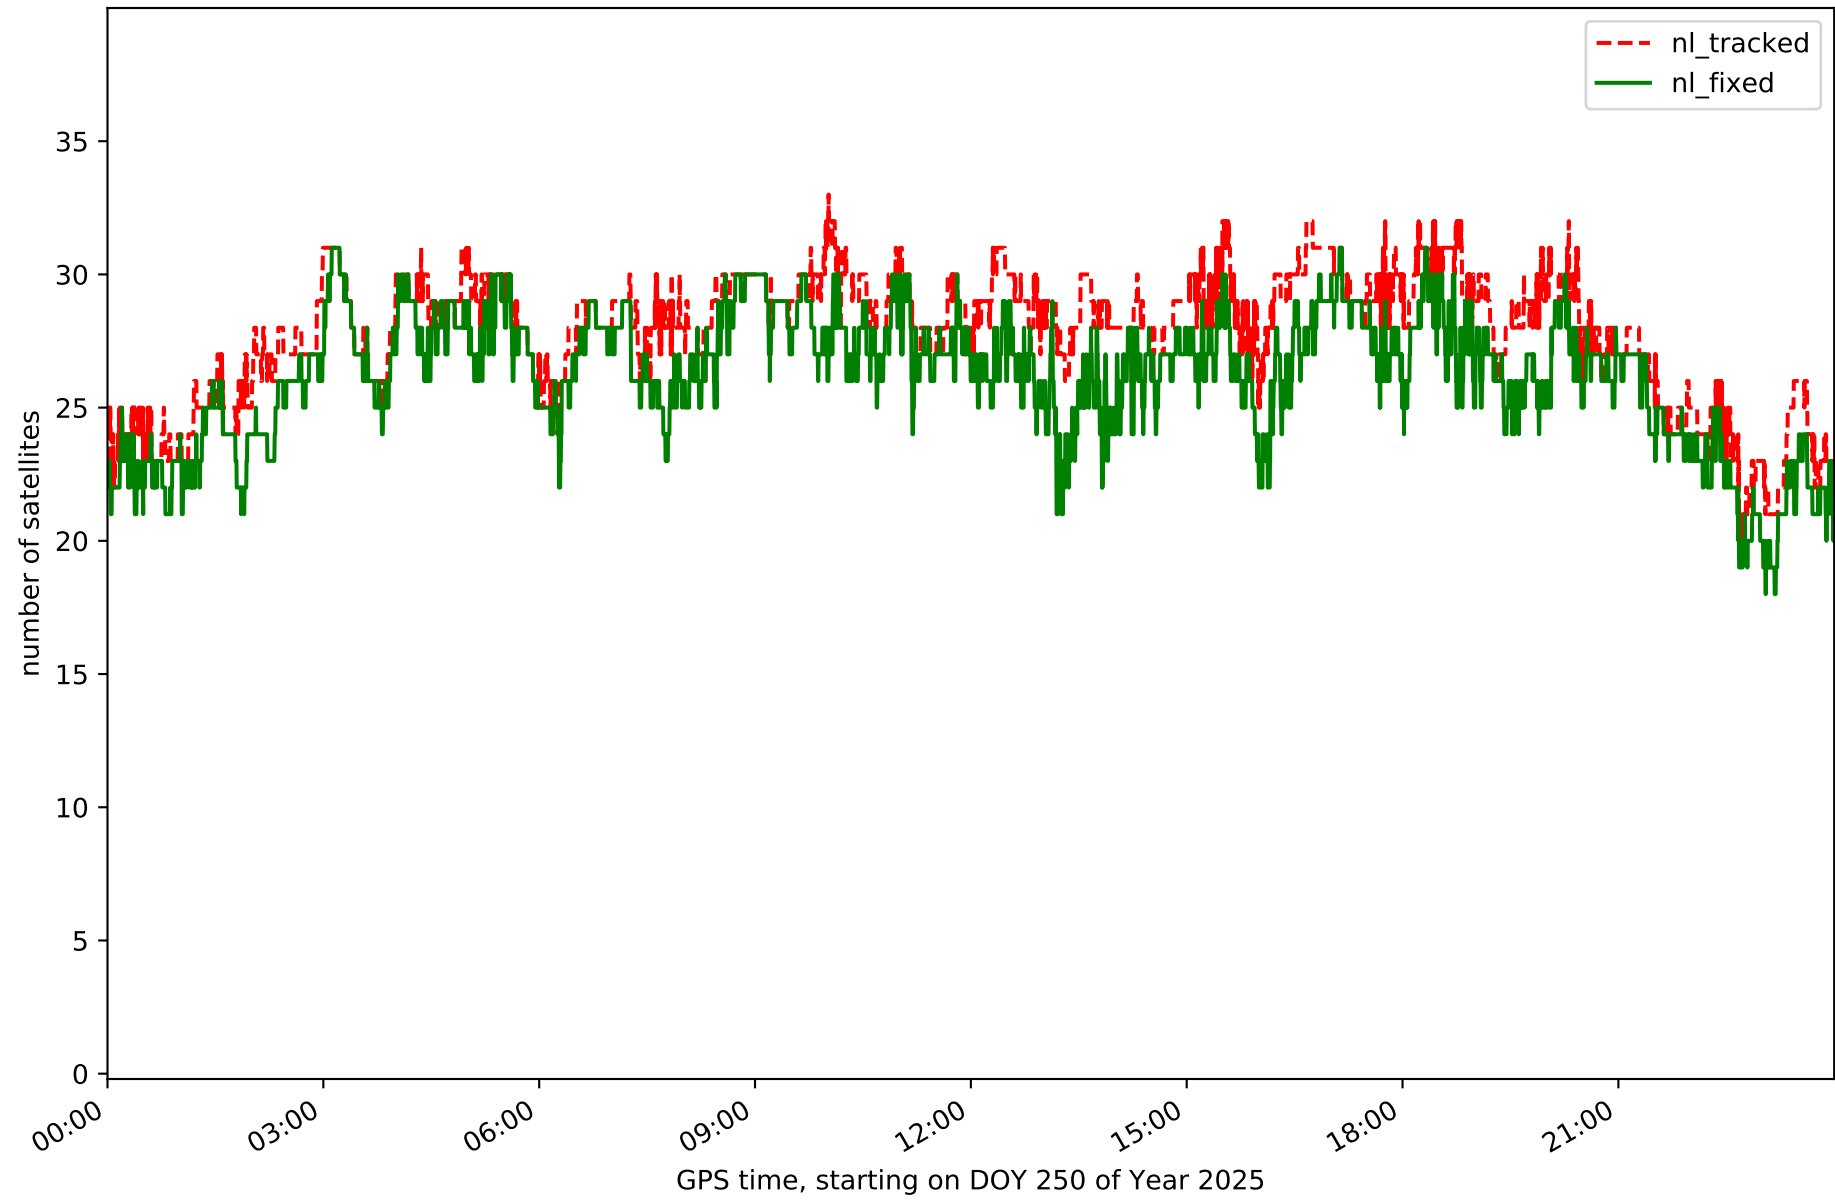


Station OLOT in network NT10

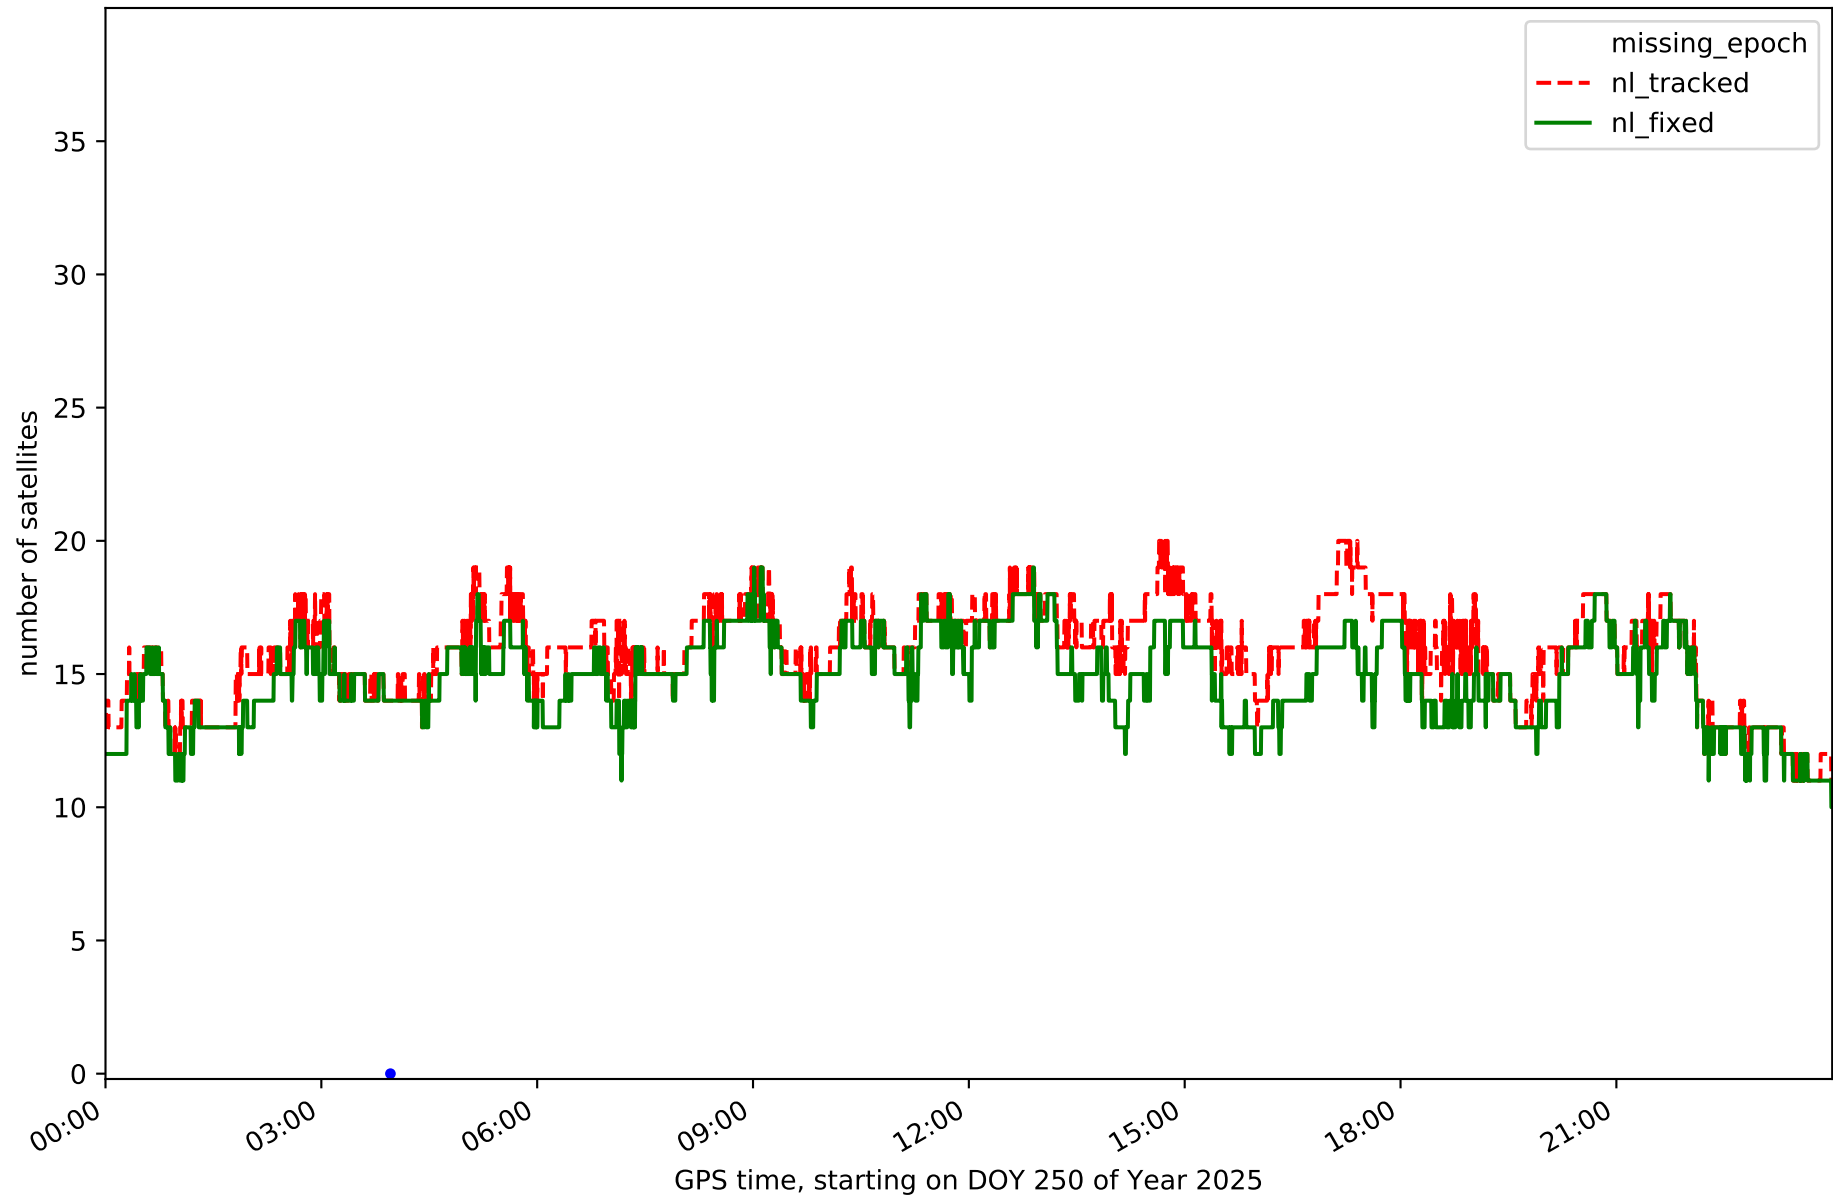


Station PUIG in network NT10

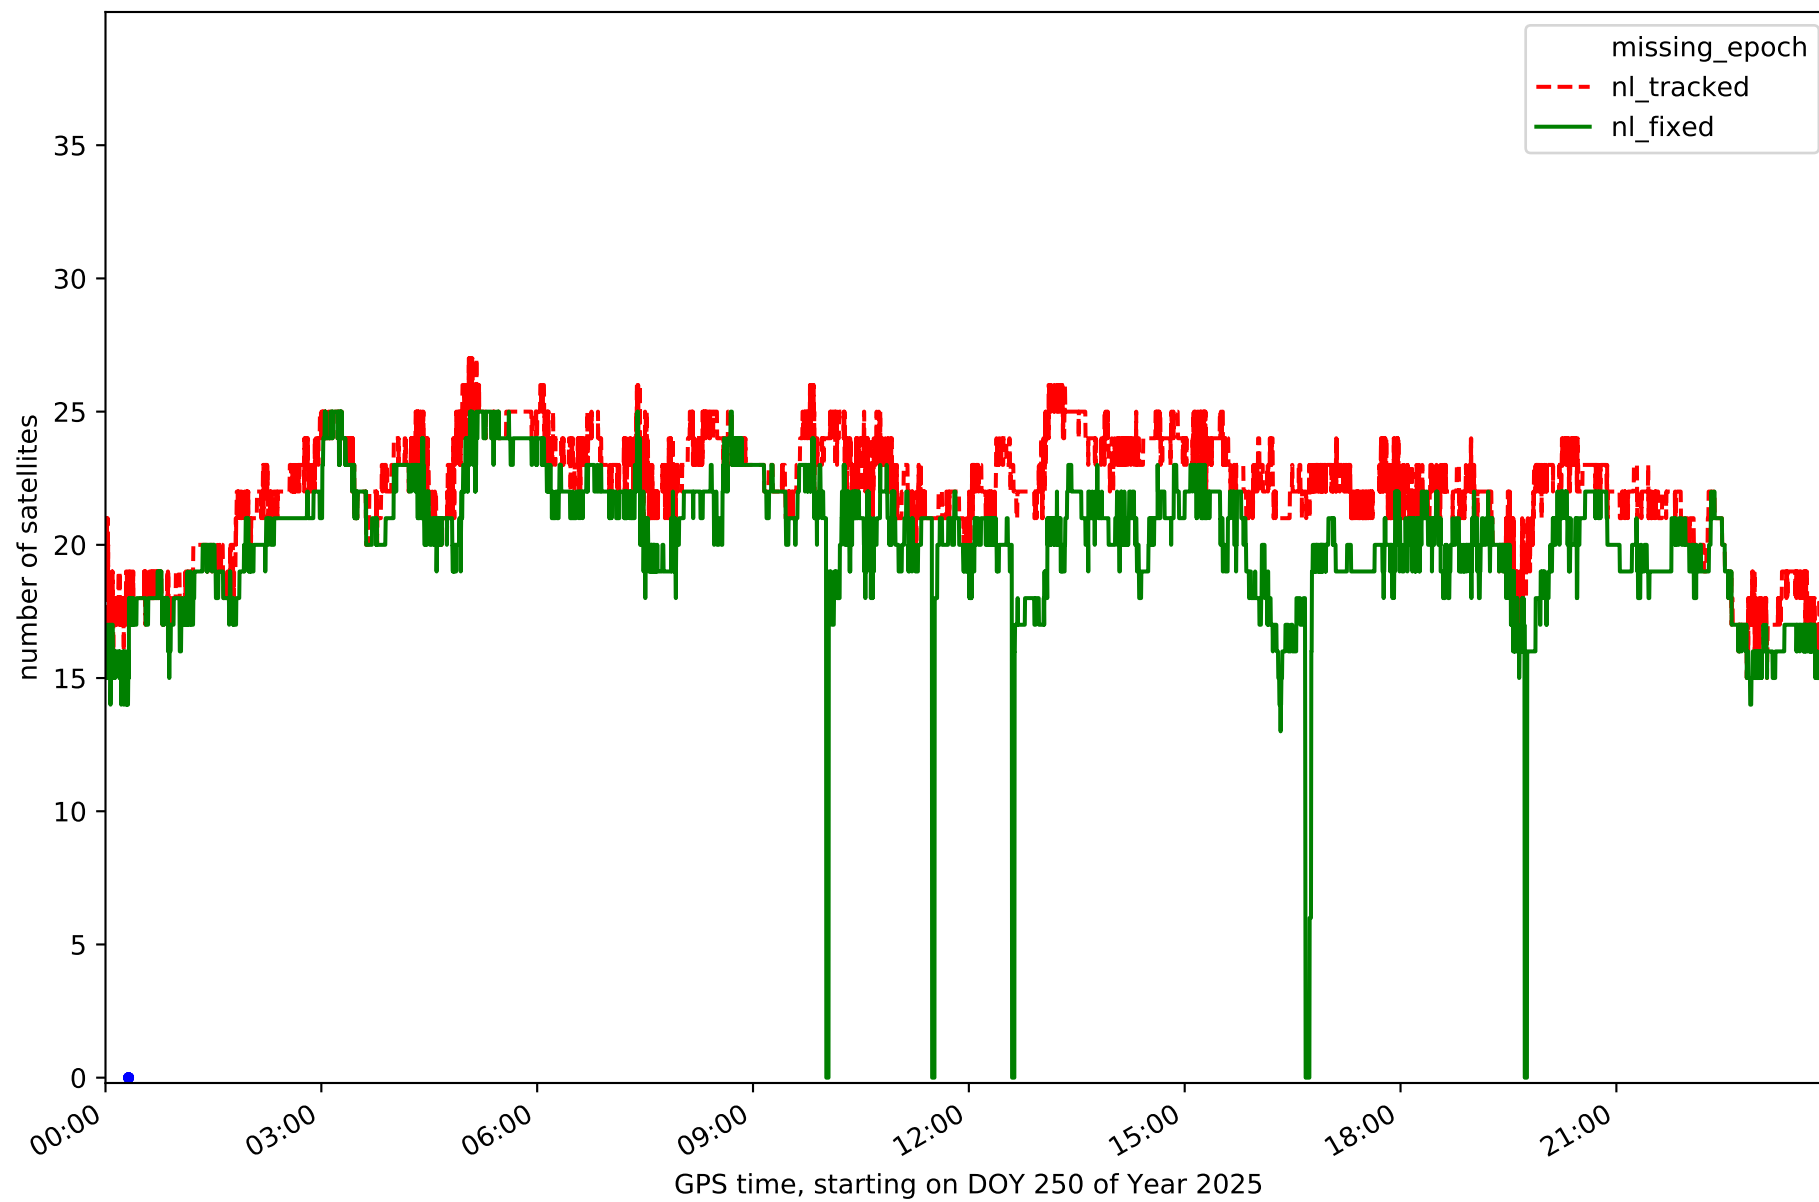


Station TARR in network NT10

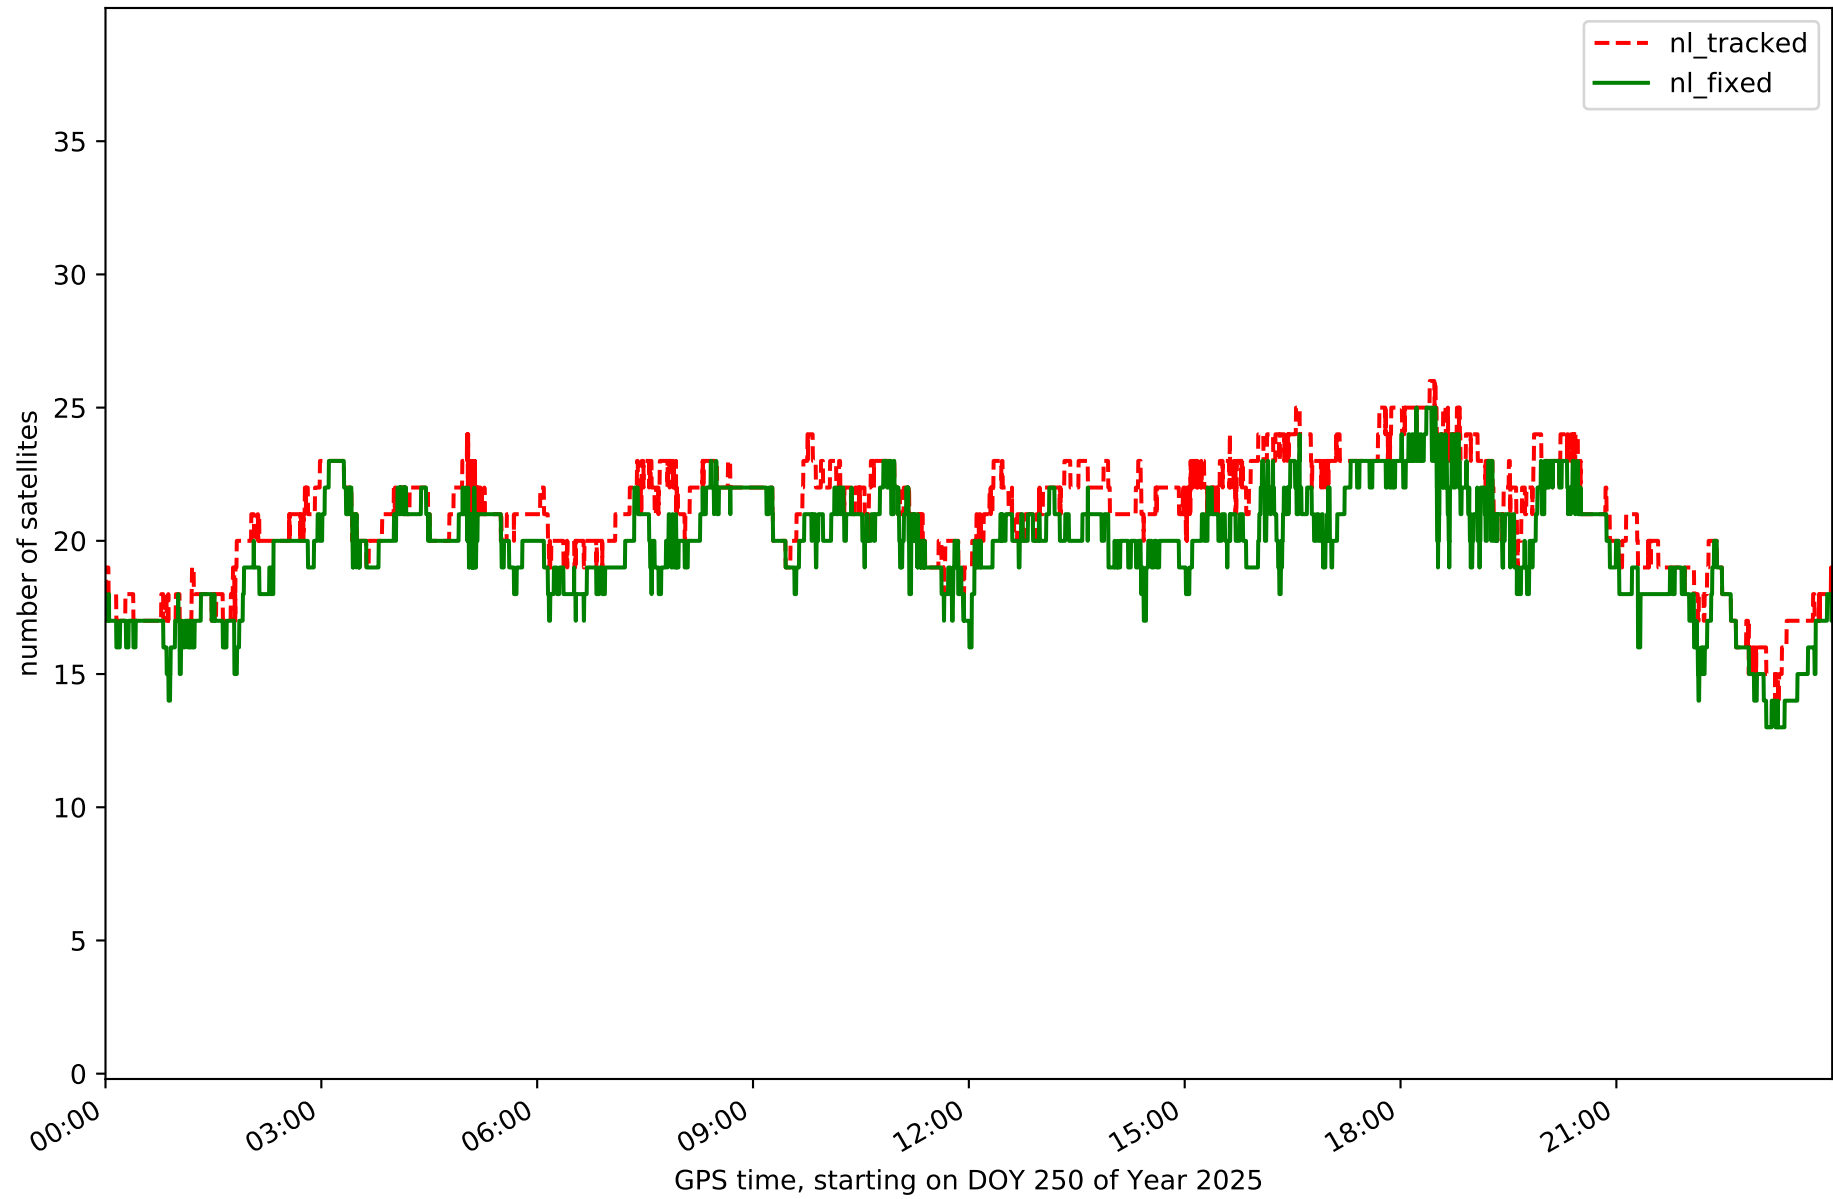


Station TRRG in network NT10

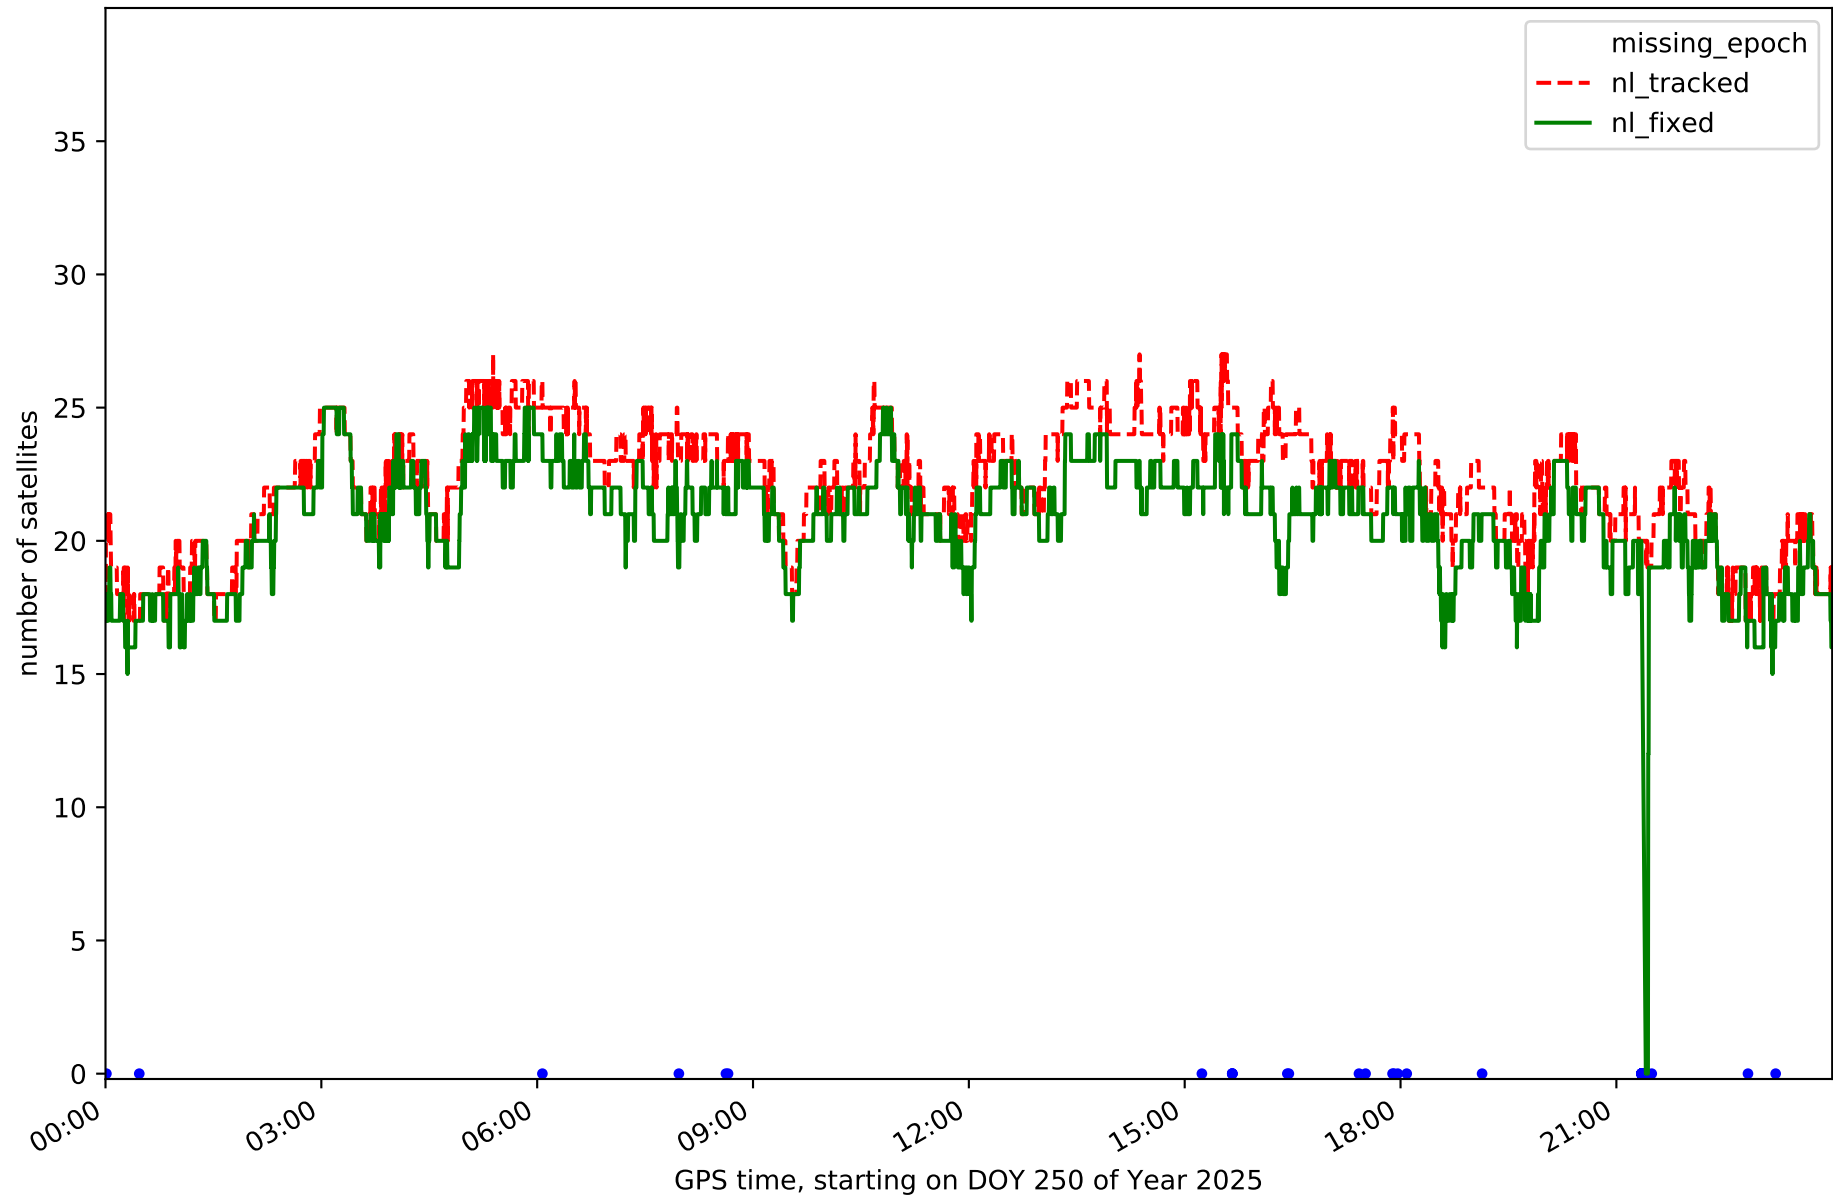


Station VRO2 in network NT10

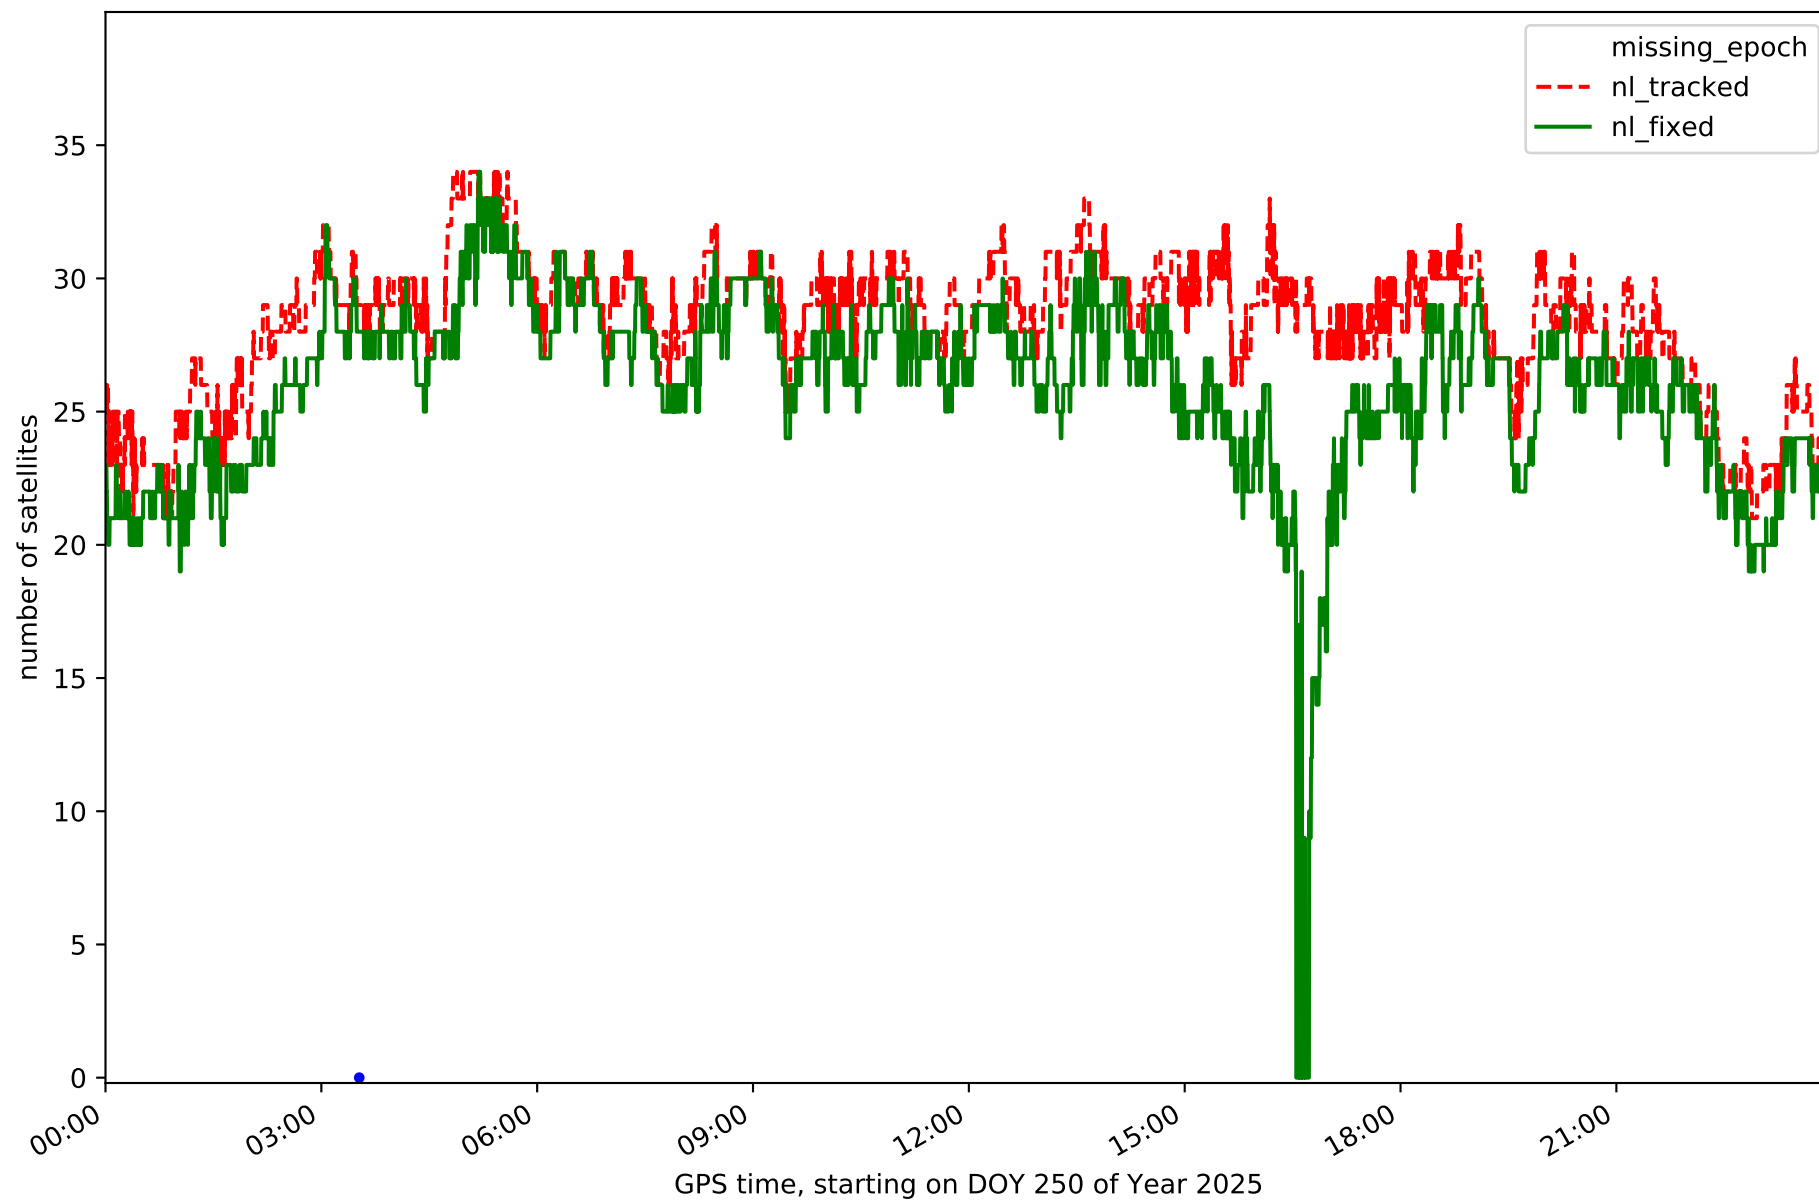


RefCheck for station BCL1 in network NT10

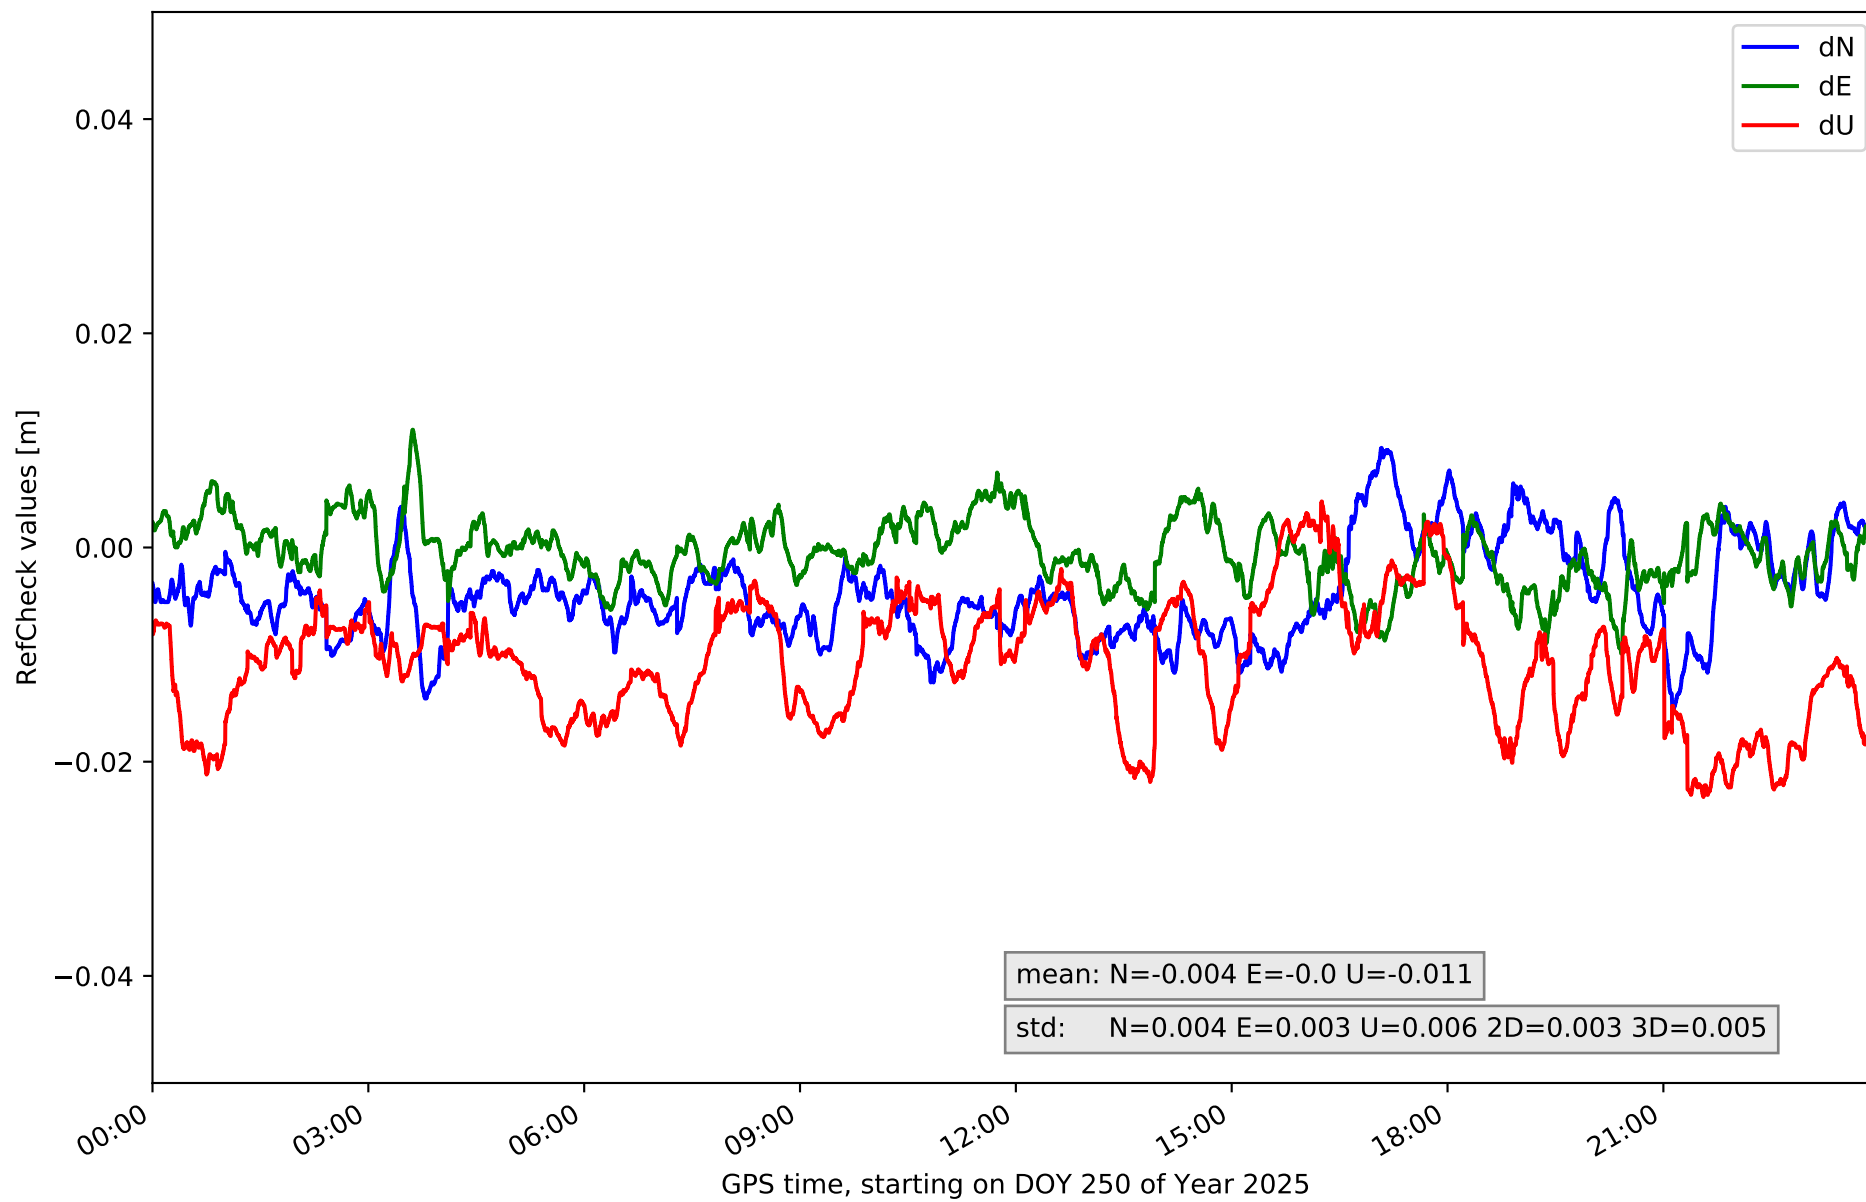


RefCheck for station BCLN in network NT10

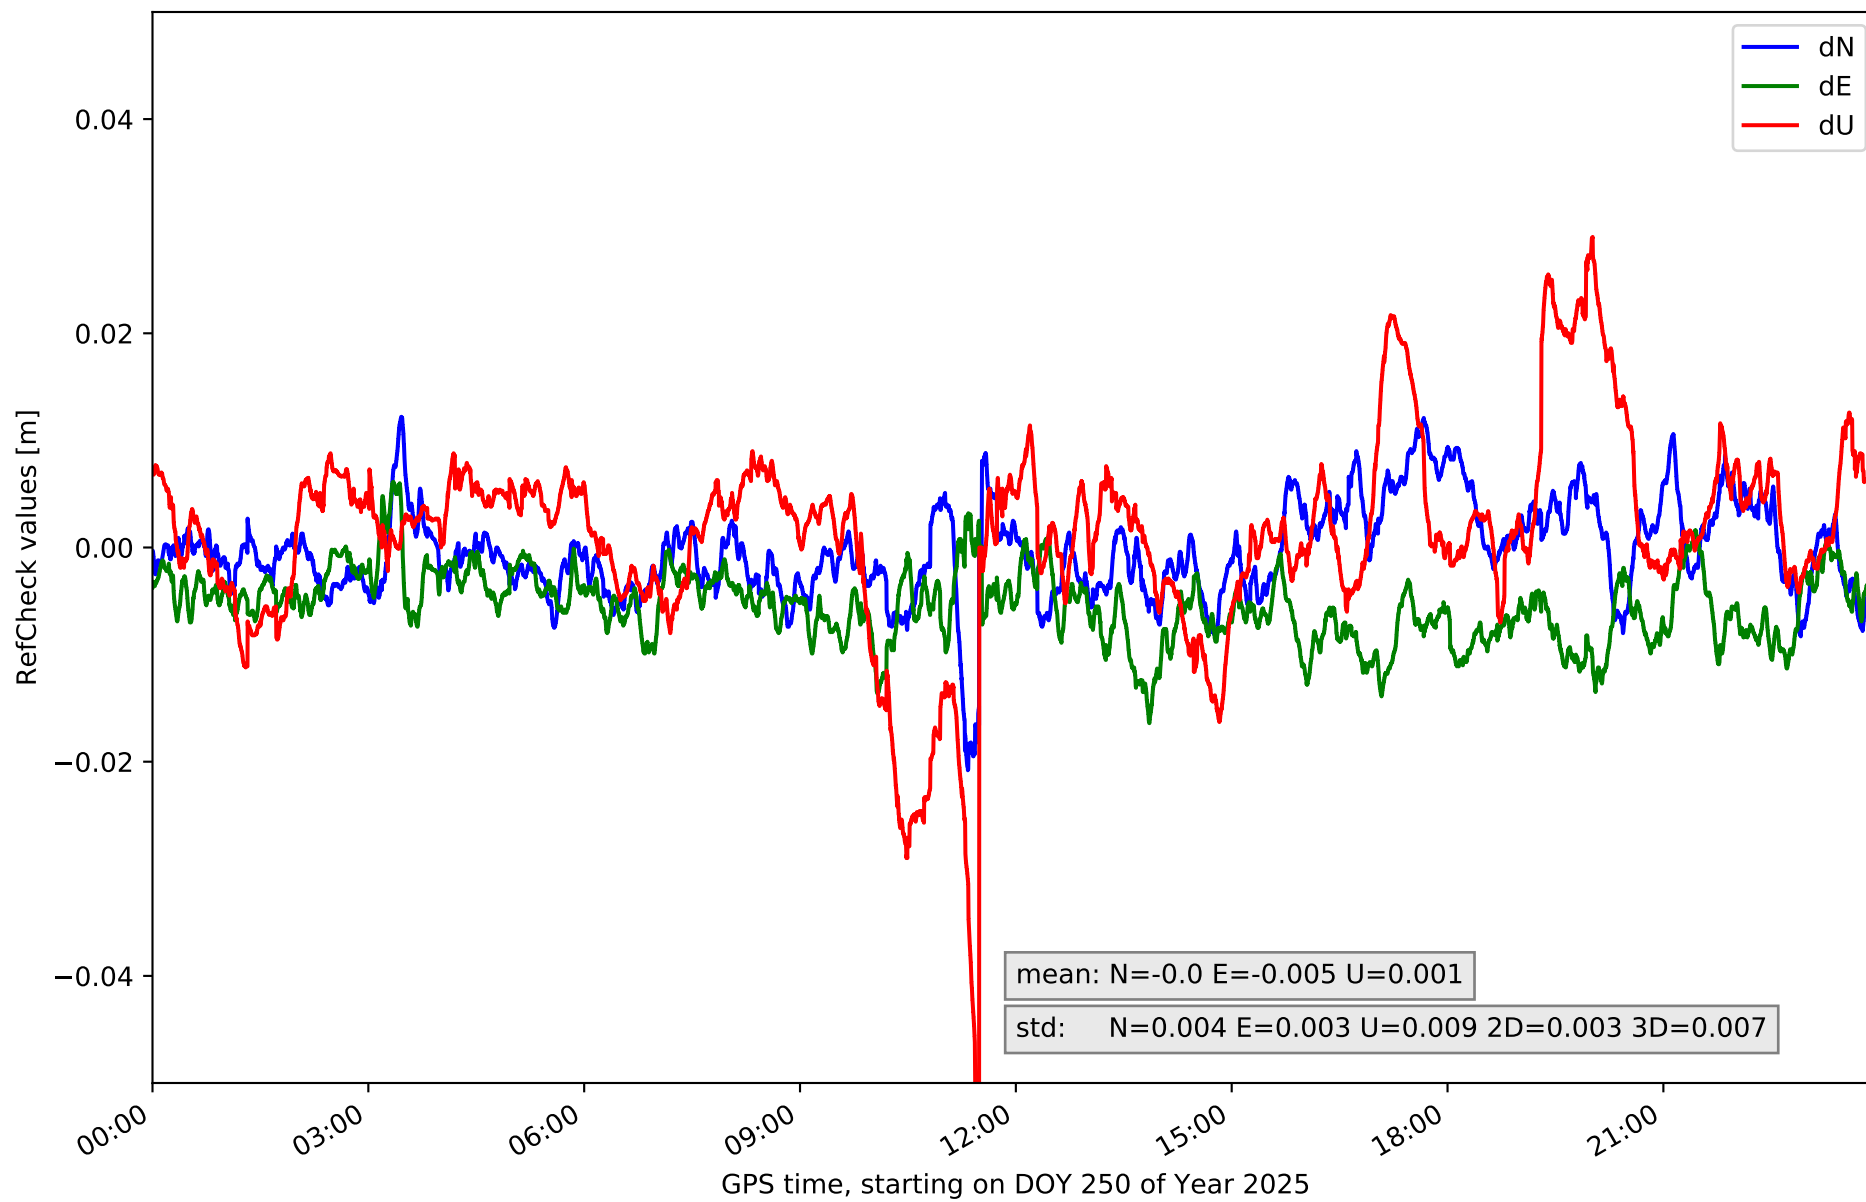


RefCheck for station BELL in network NT10

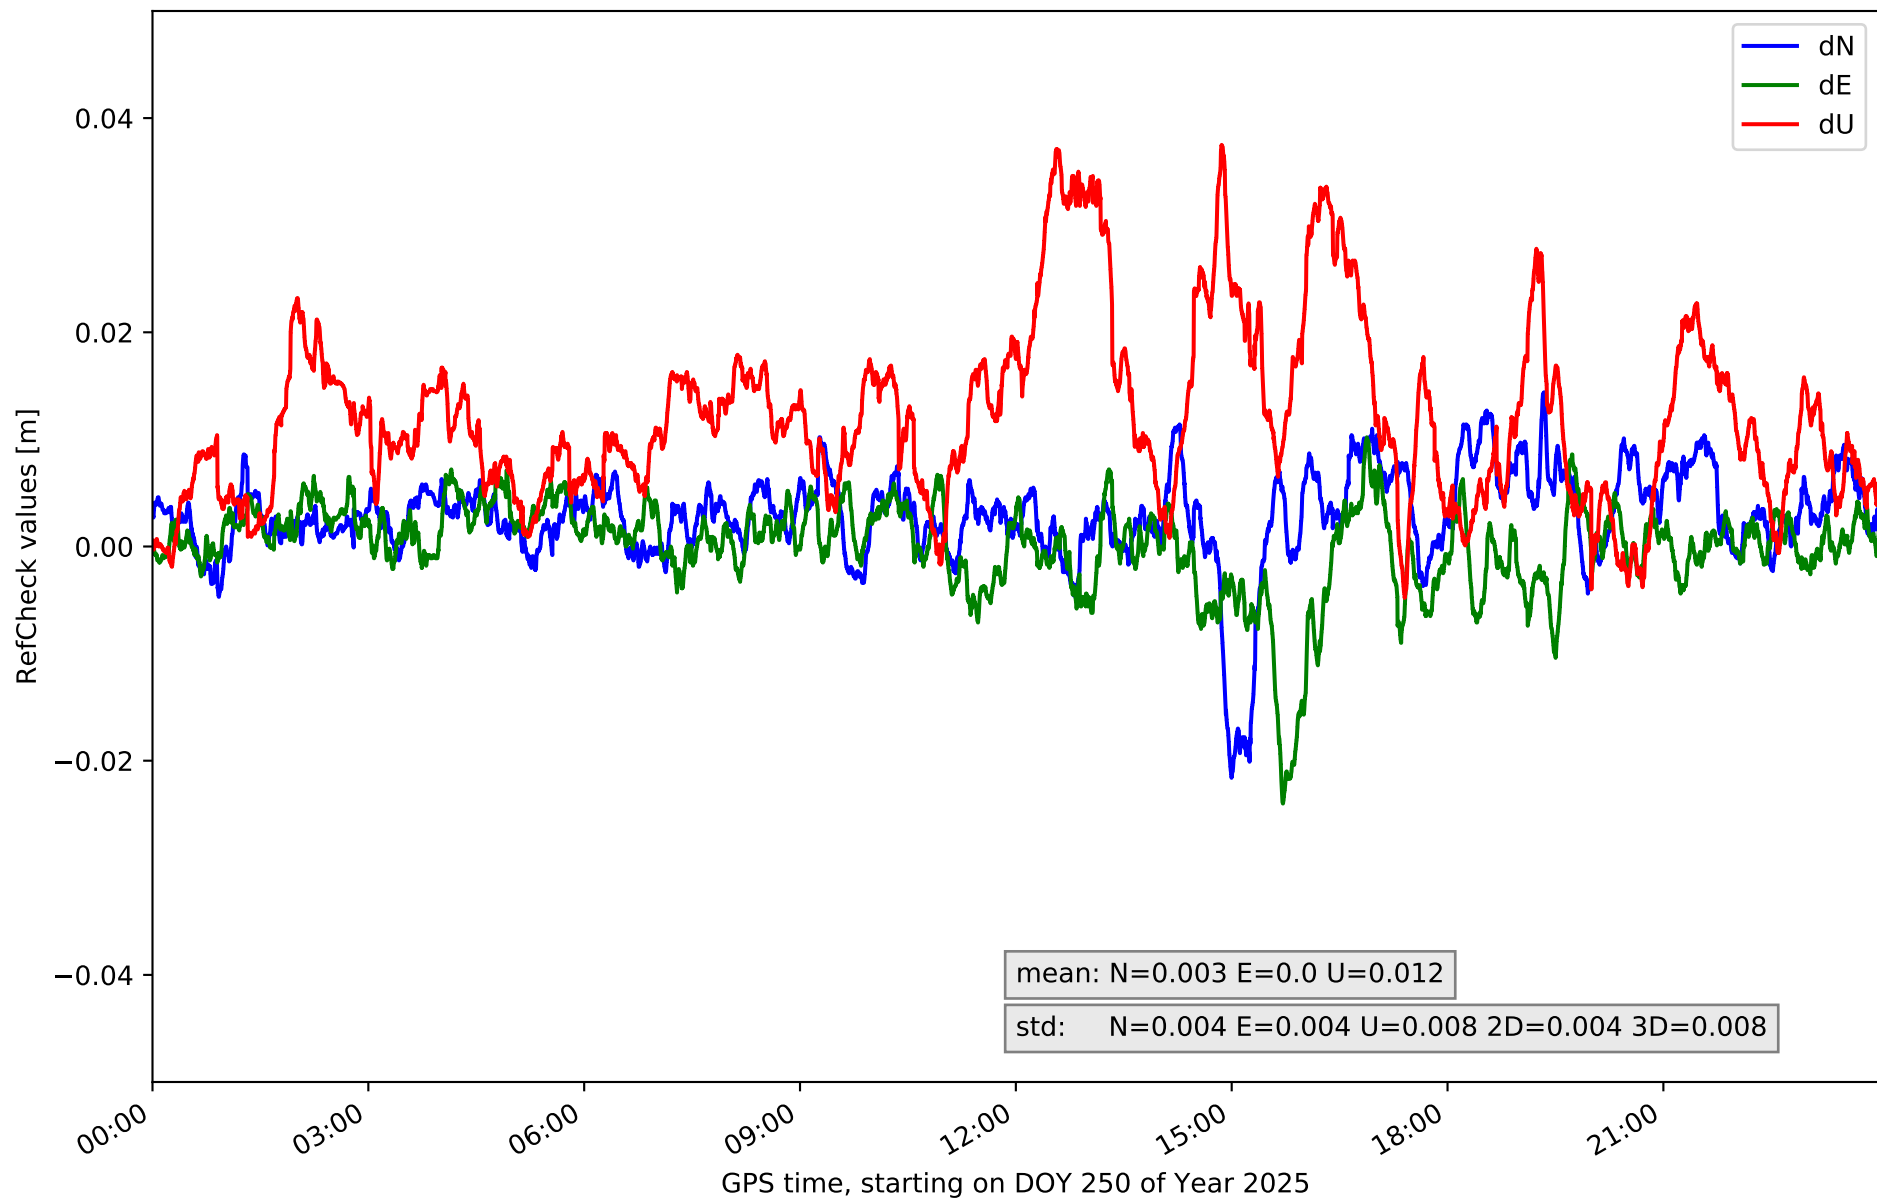


RefCheck for station BINE in network NT10

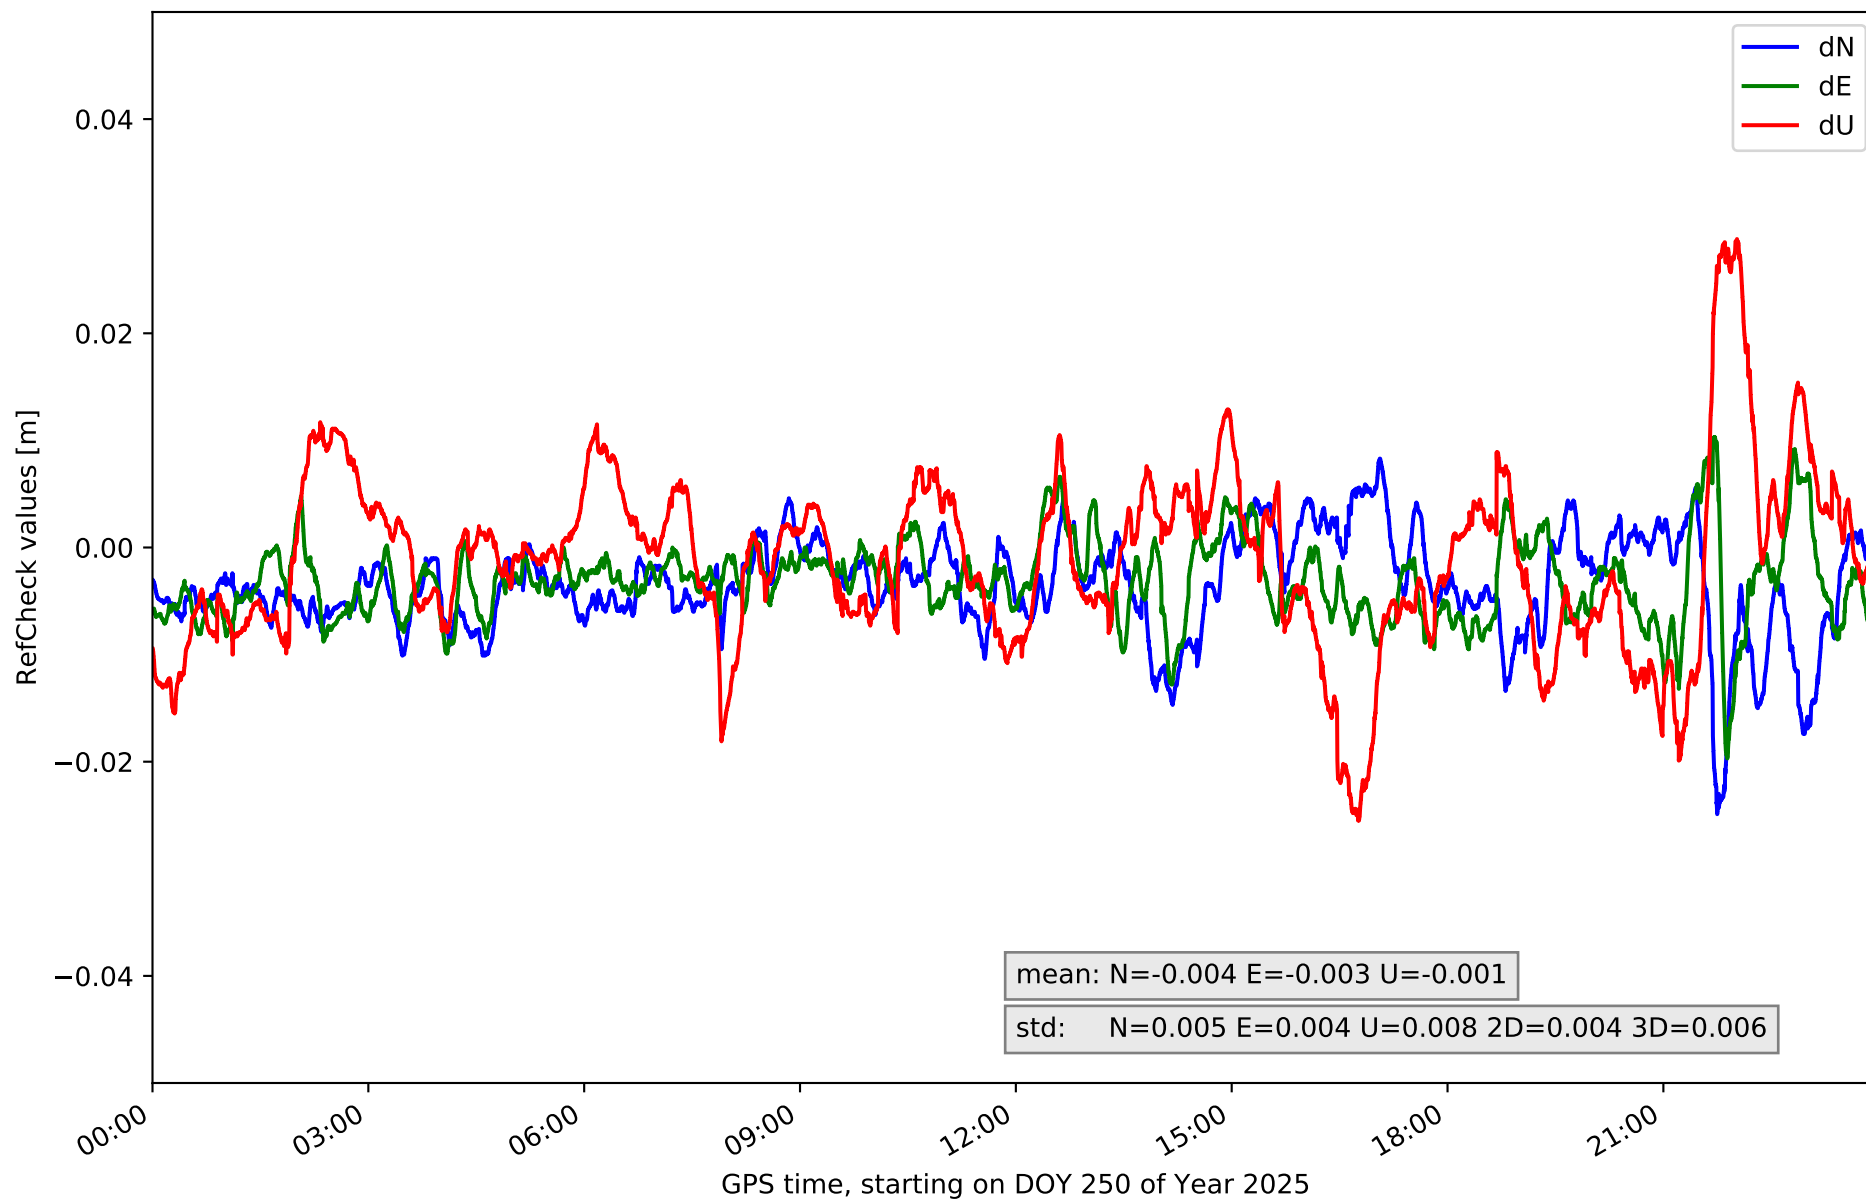


RefCheck for station CREU in network NT10

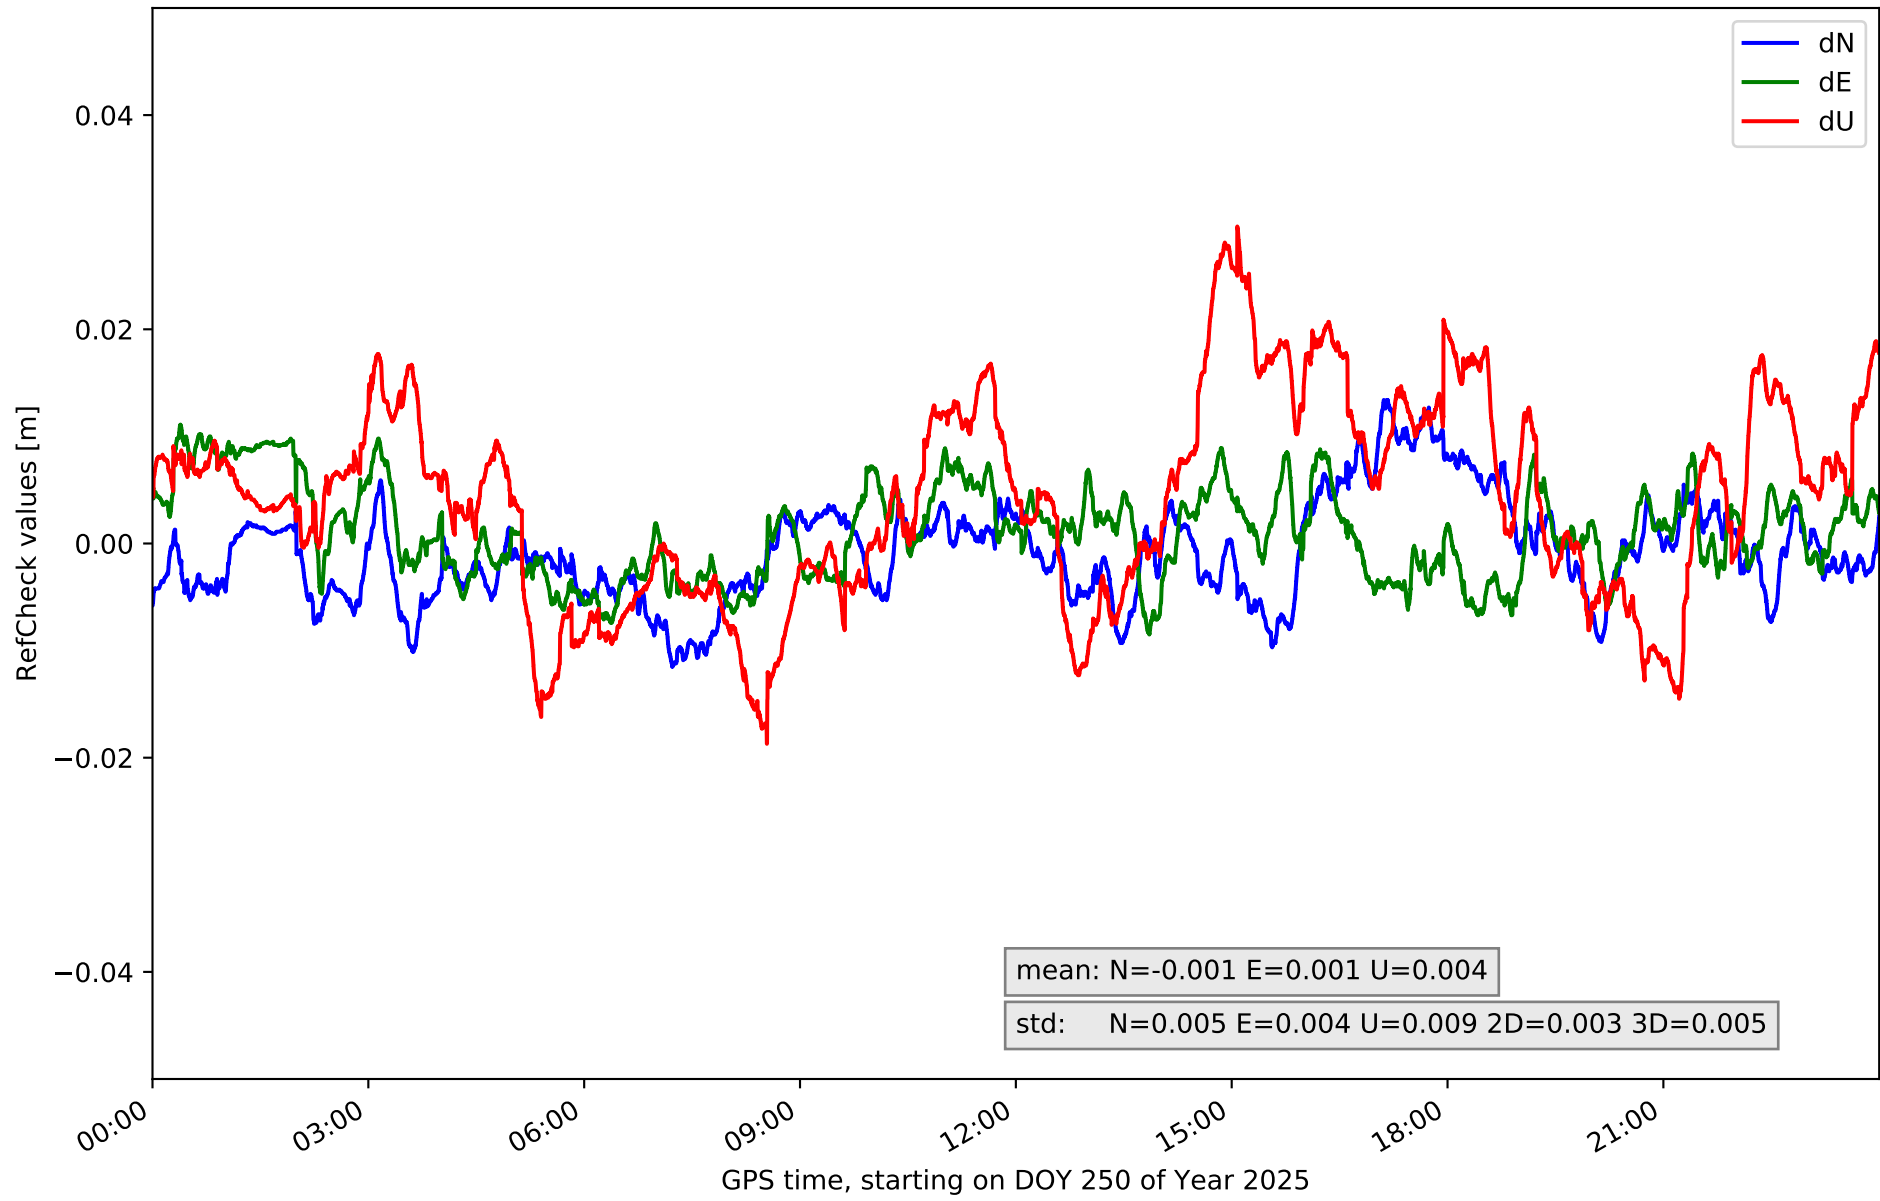


RefCheck for station EBRE in network NT10

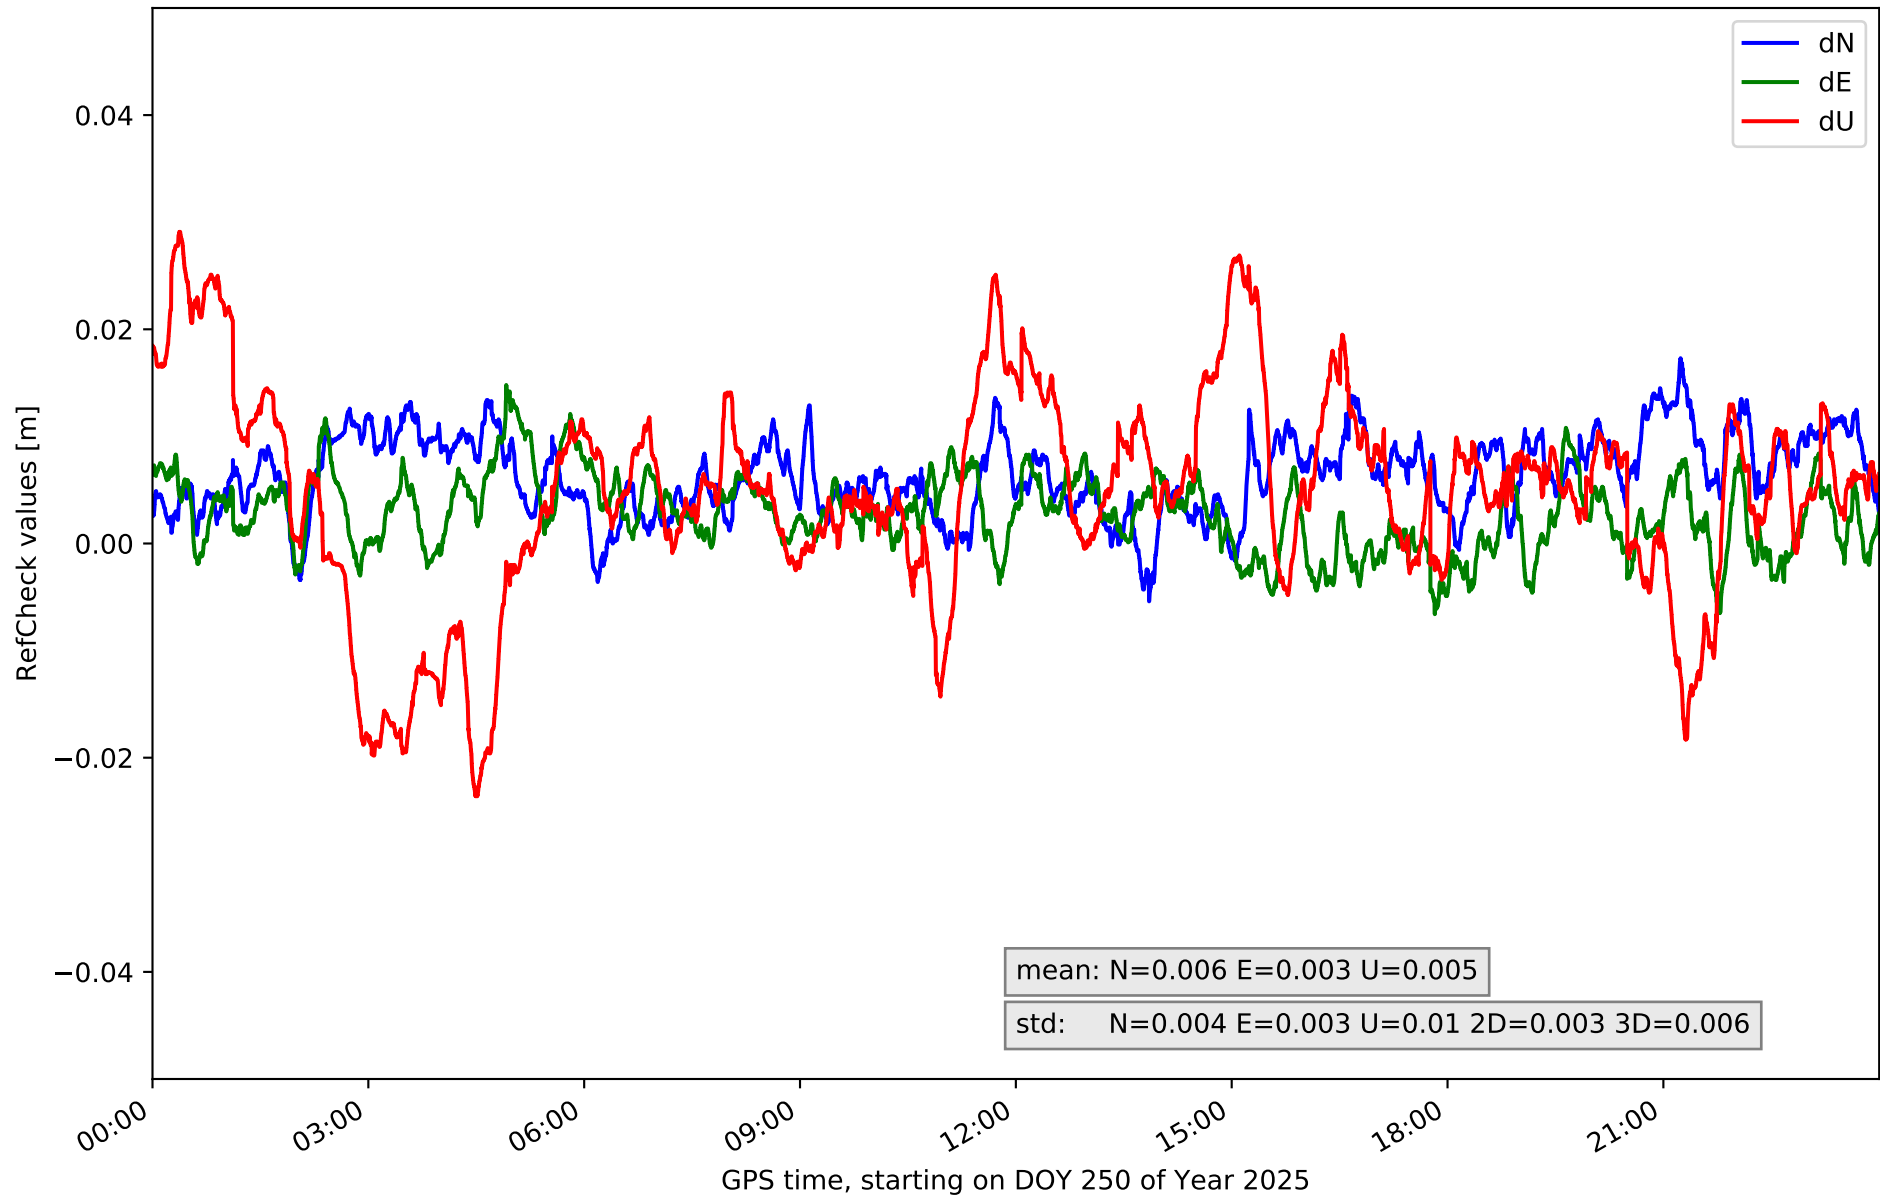


RefCheck for station EBRO in network NT10

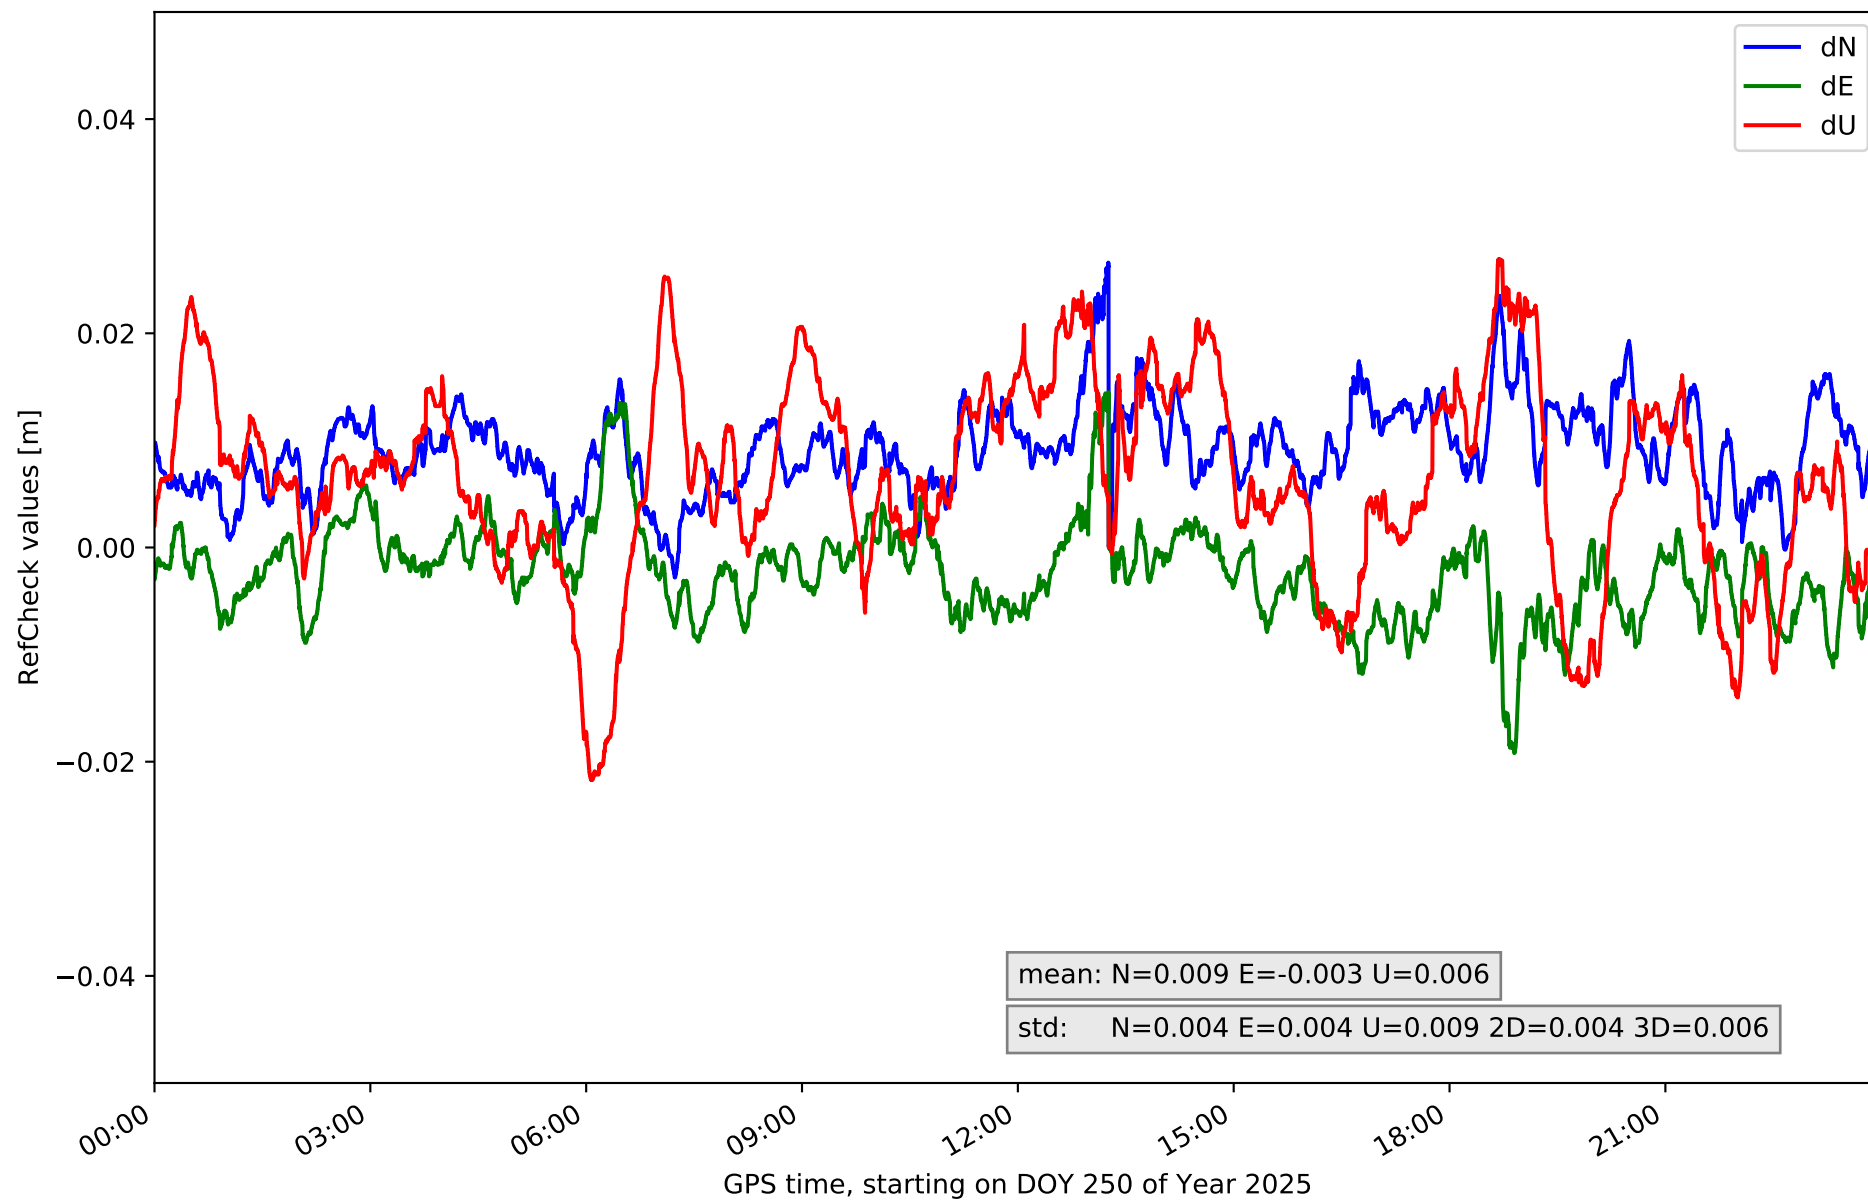


RefCheck for station ESCO in network NT10

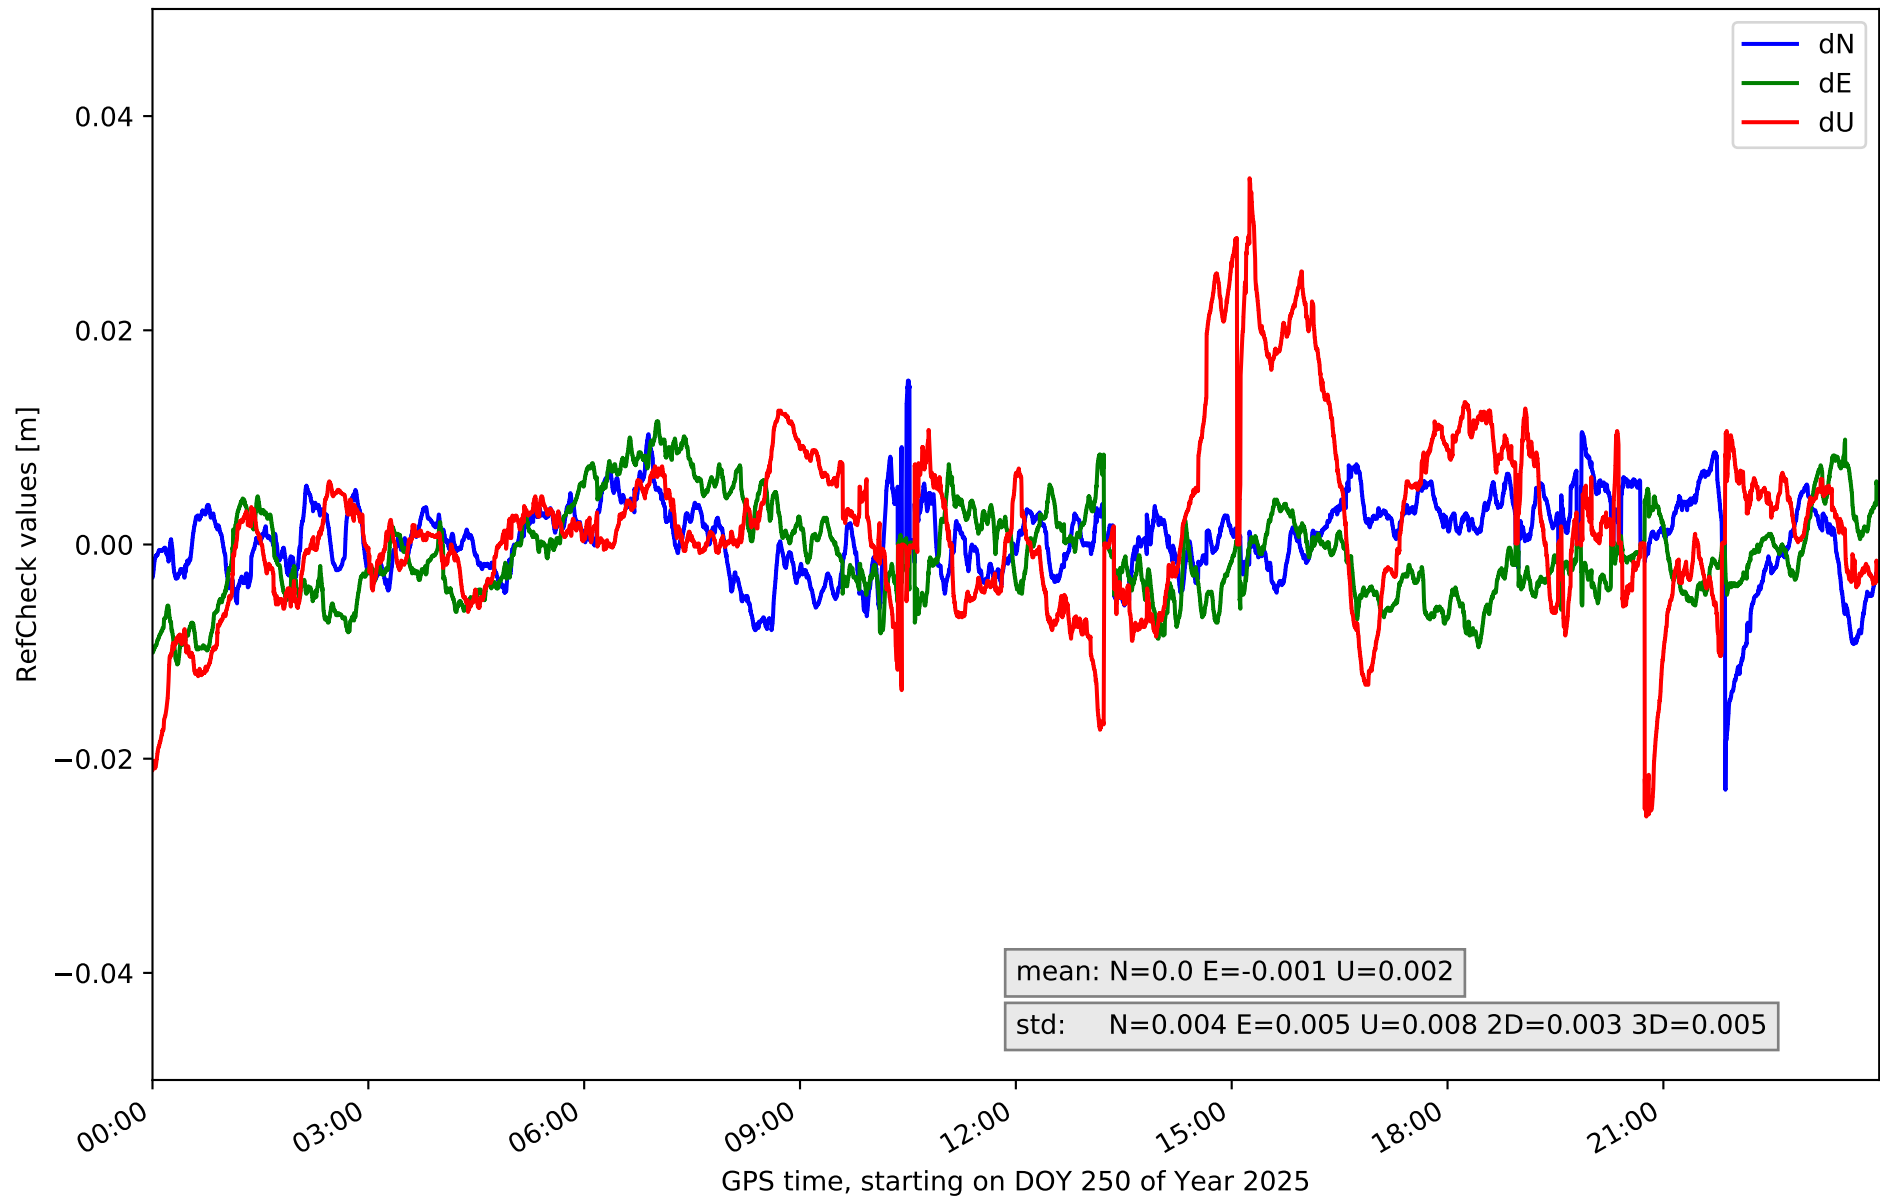


RefCheck for station GRAU in network NT10

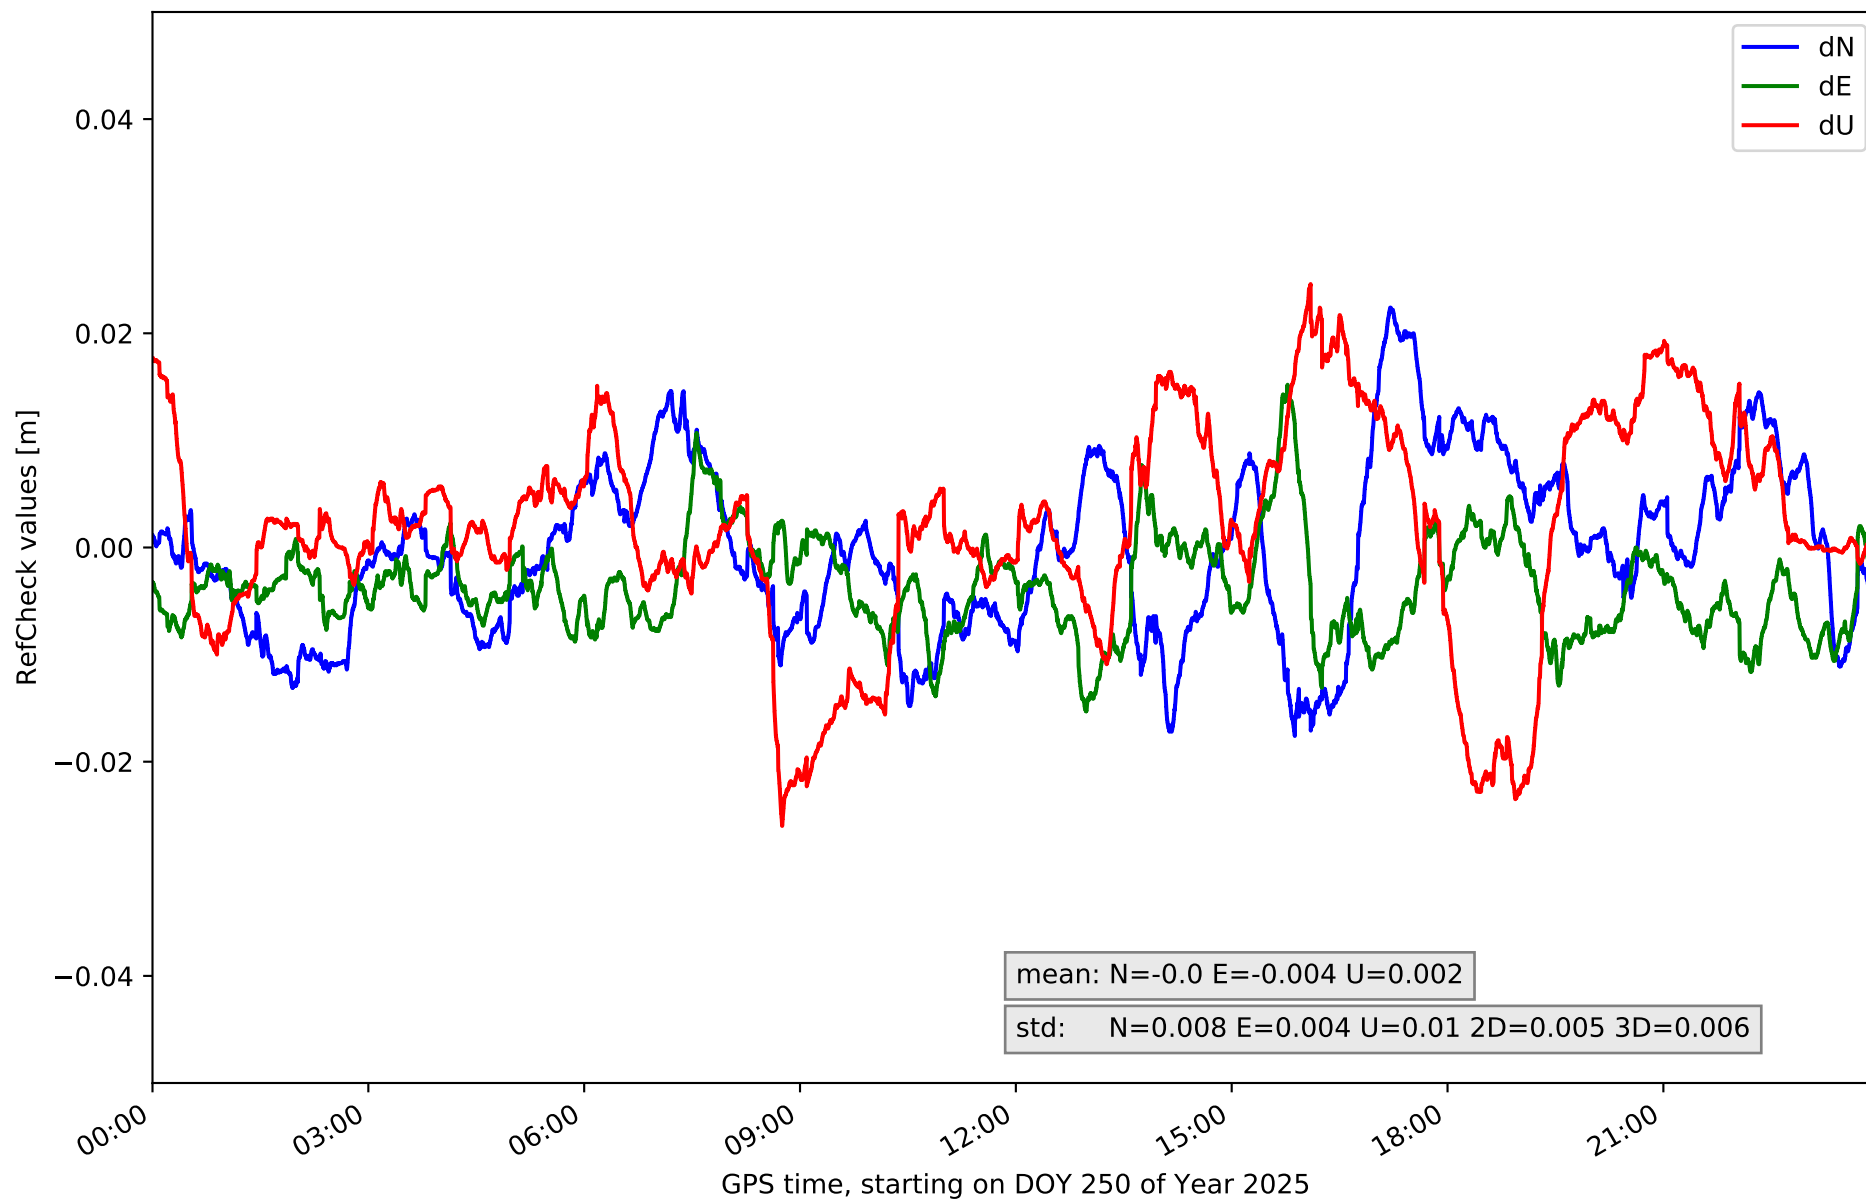


RefCheck for station MEQU in network NT10

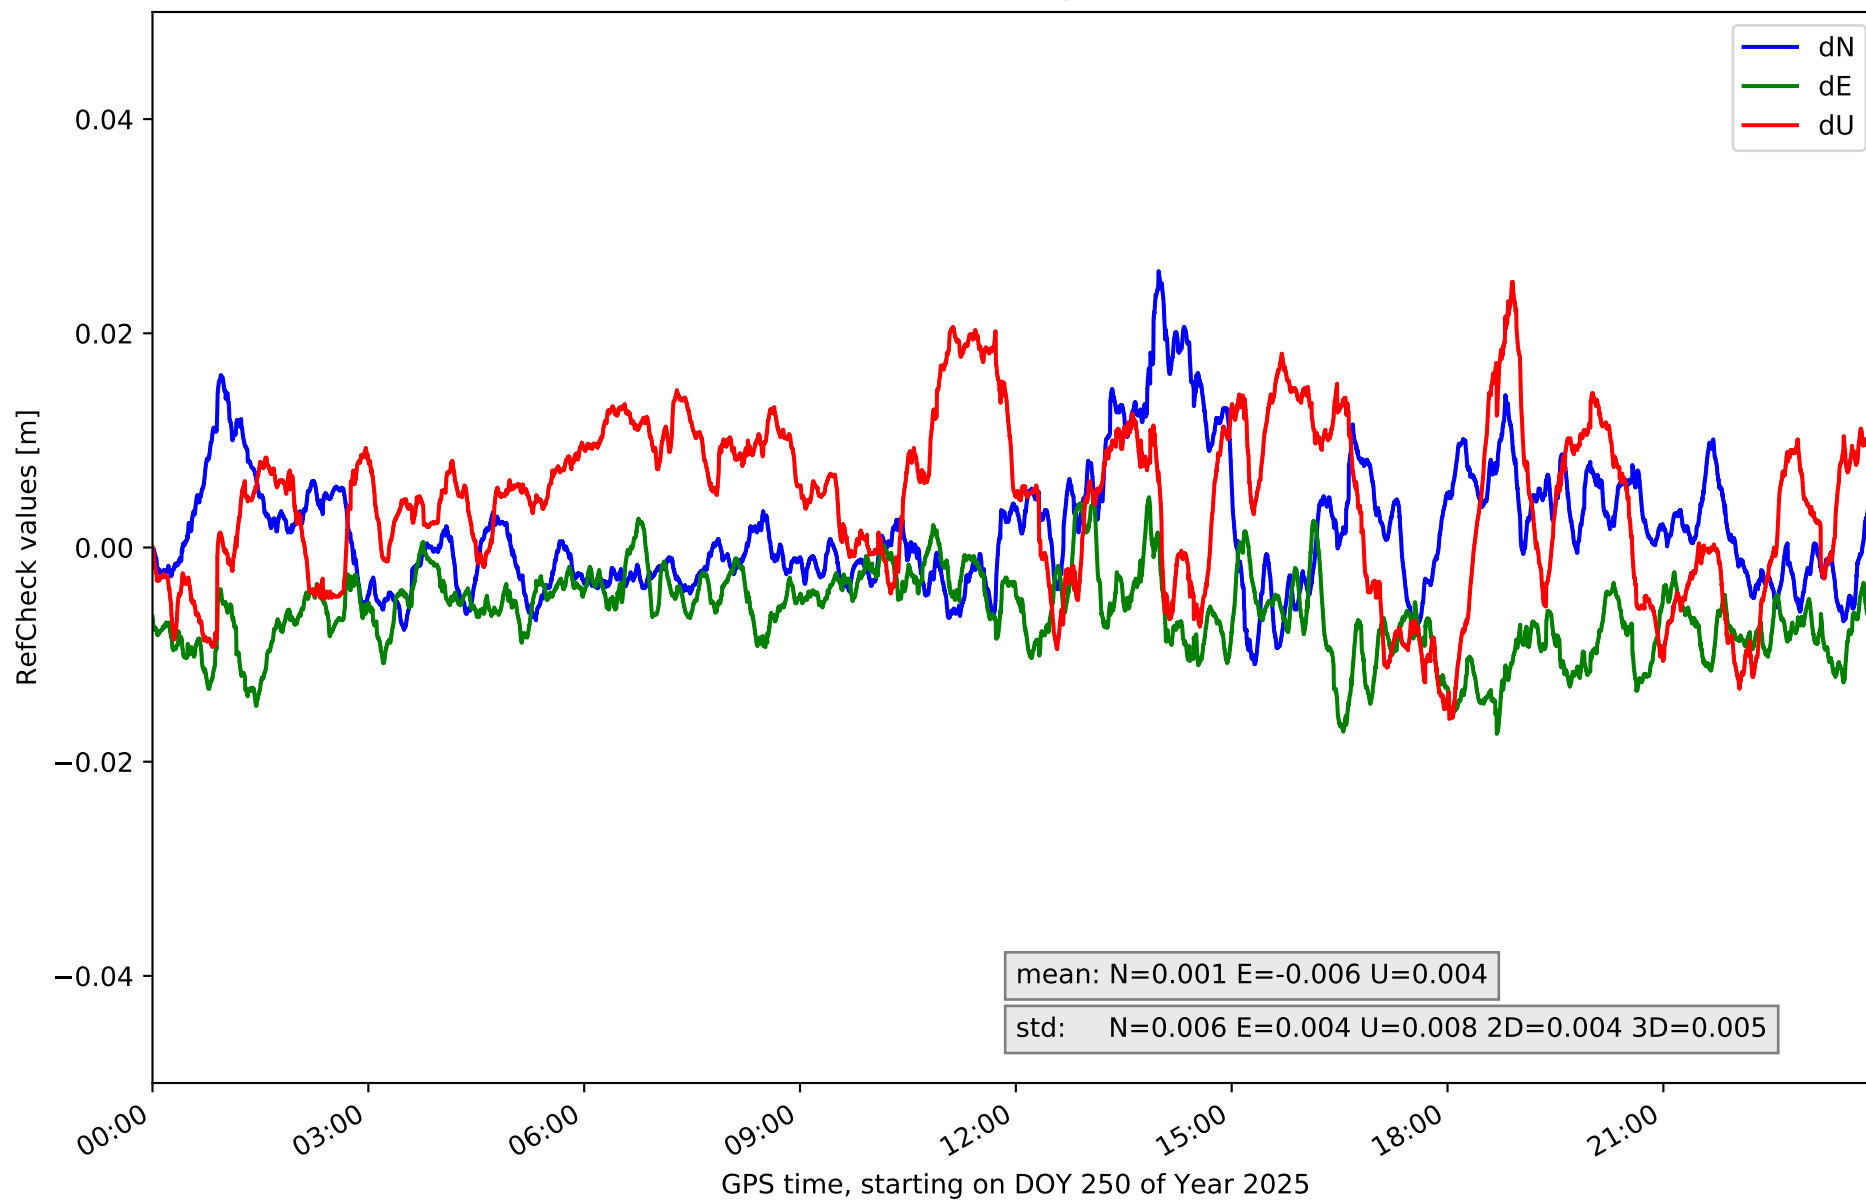


RefCheck for station OLOT in network NT10

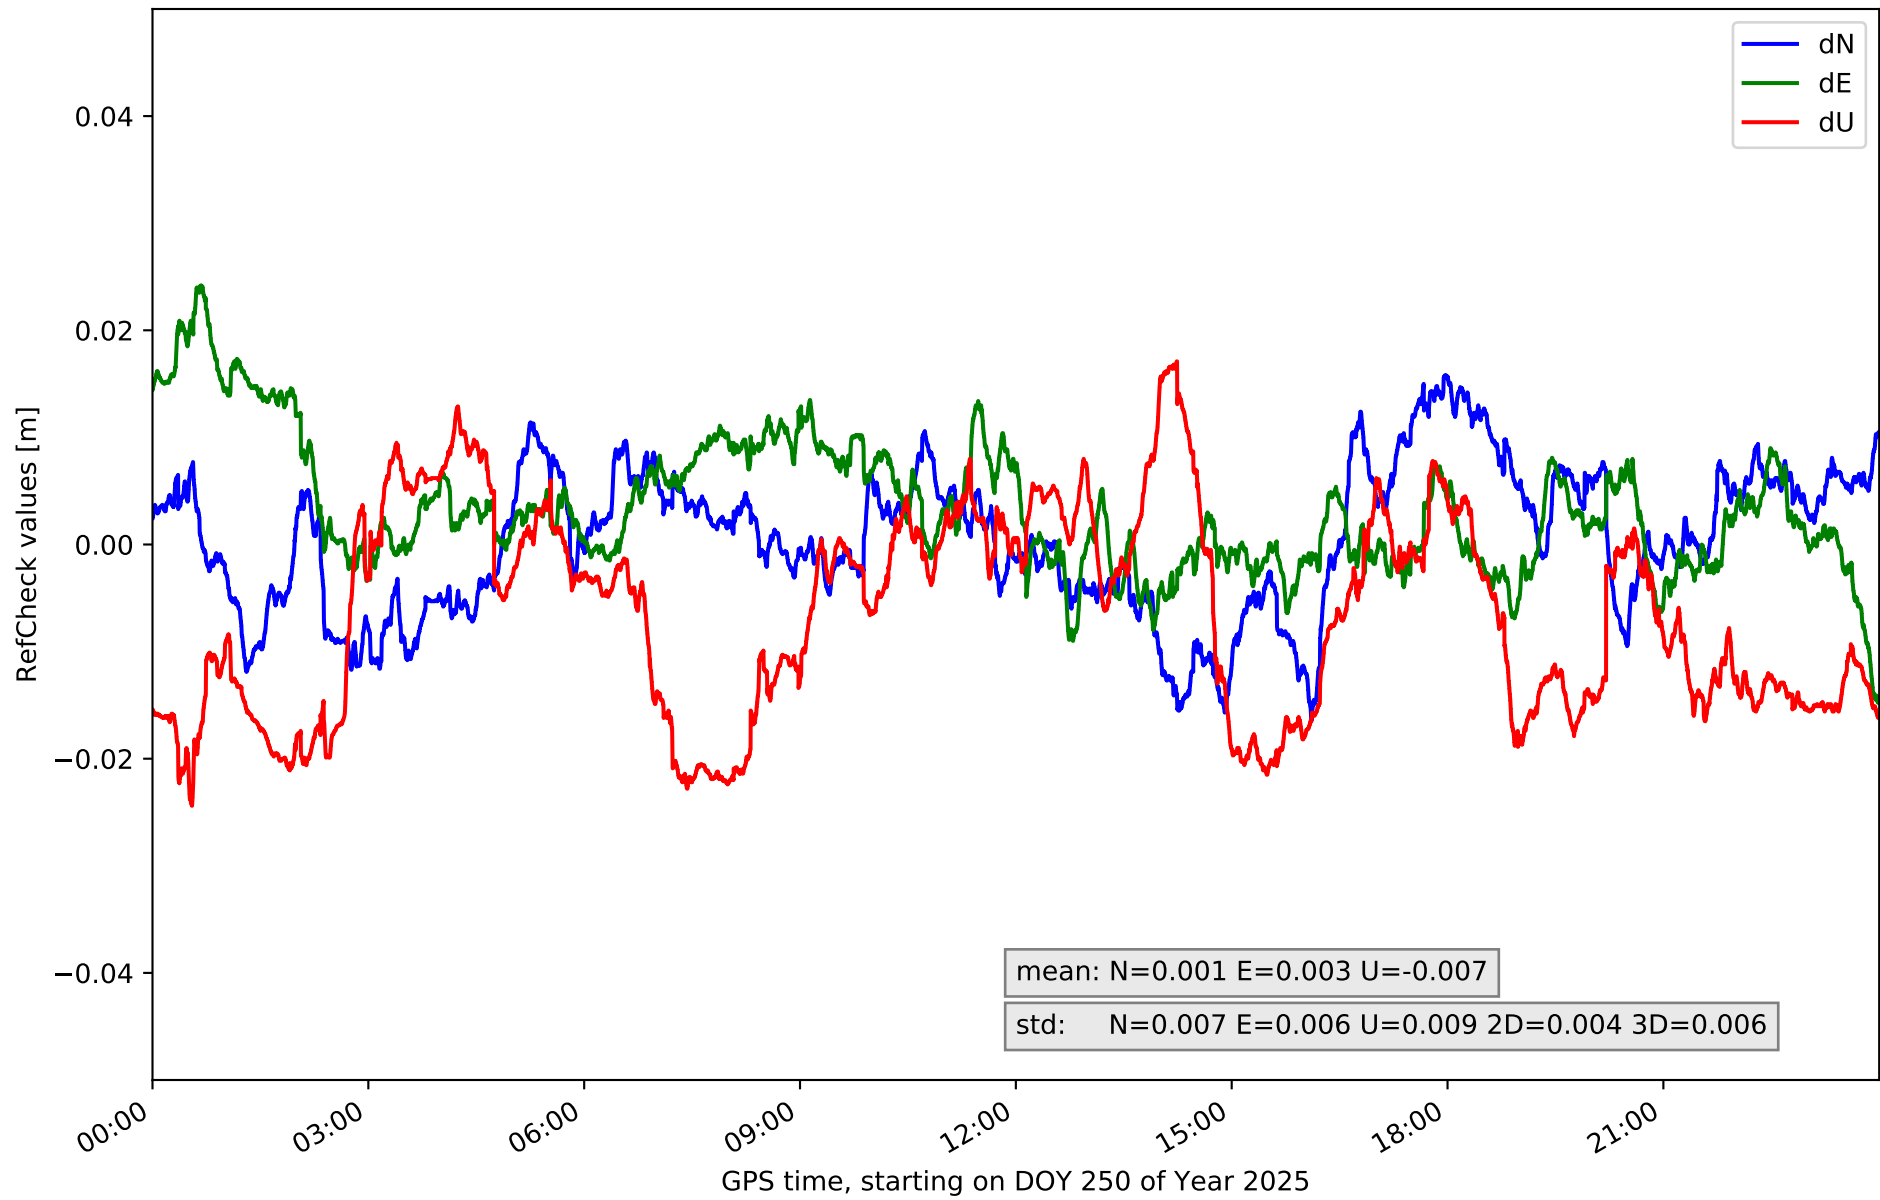


RefCheck for station PUIG in network NT10

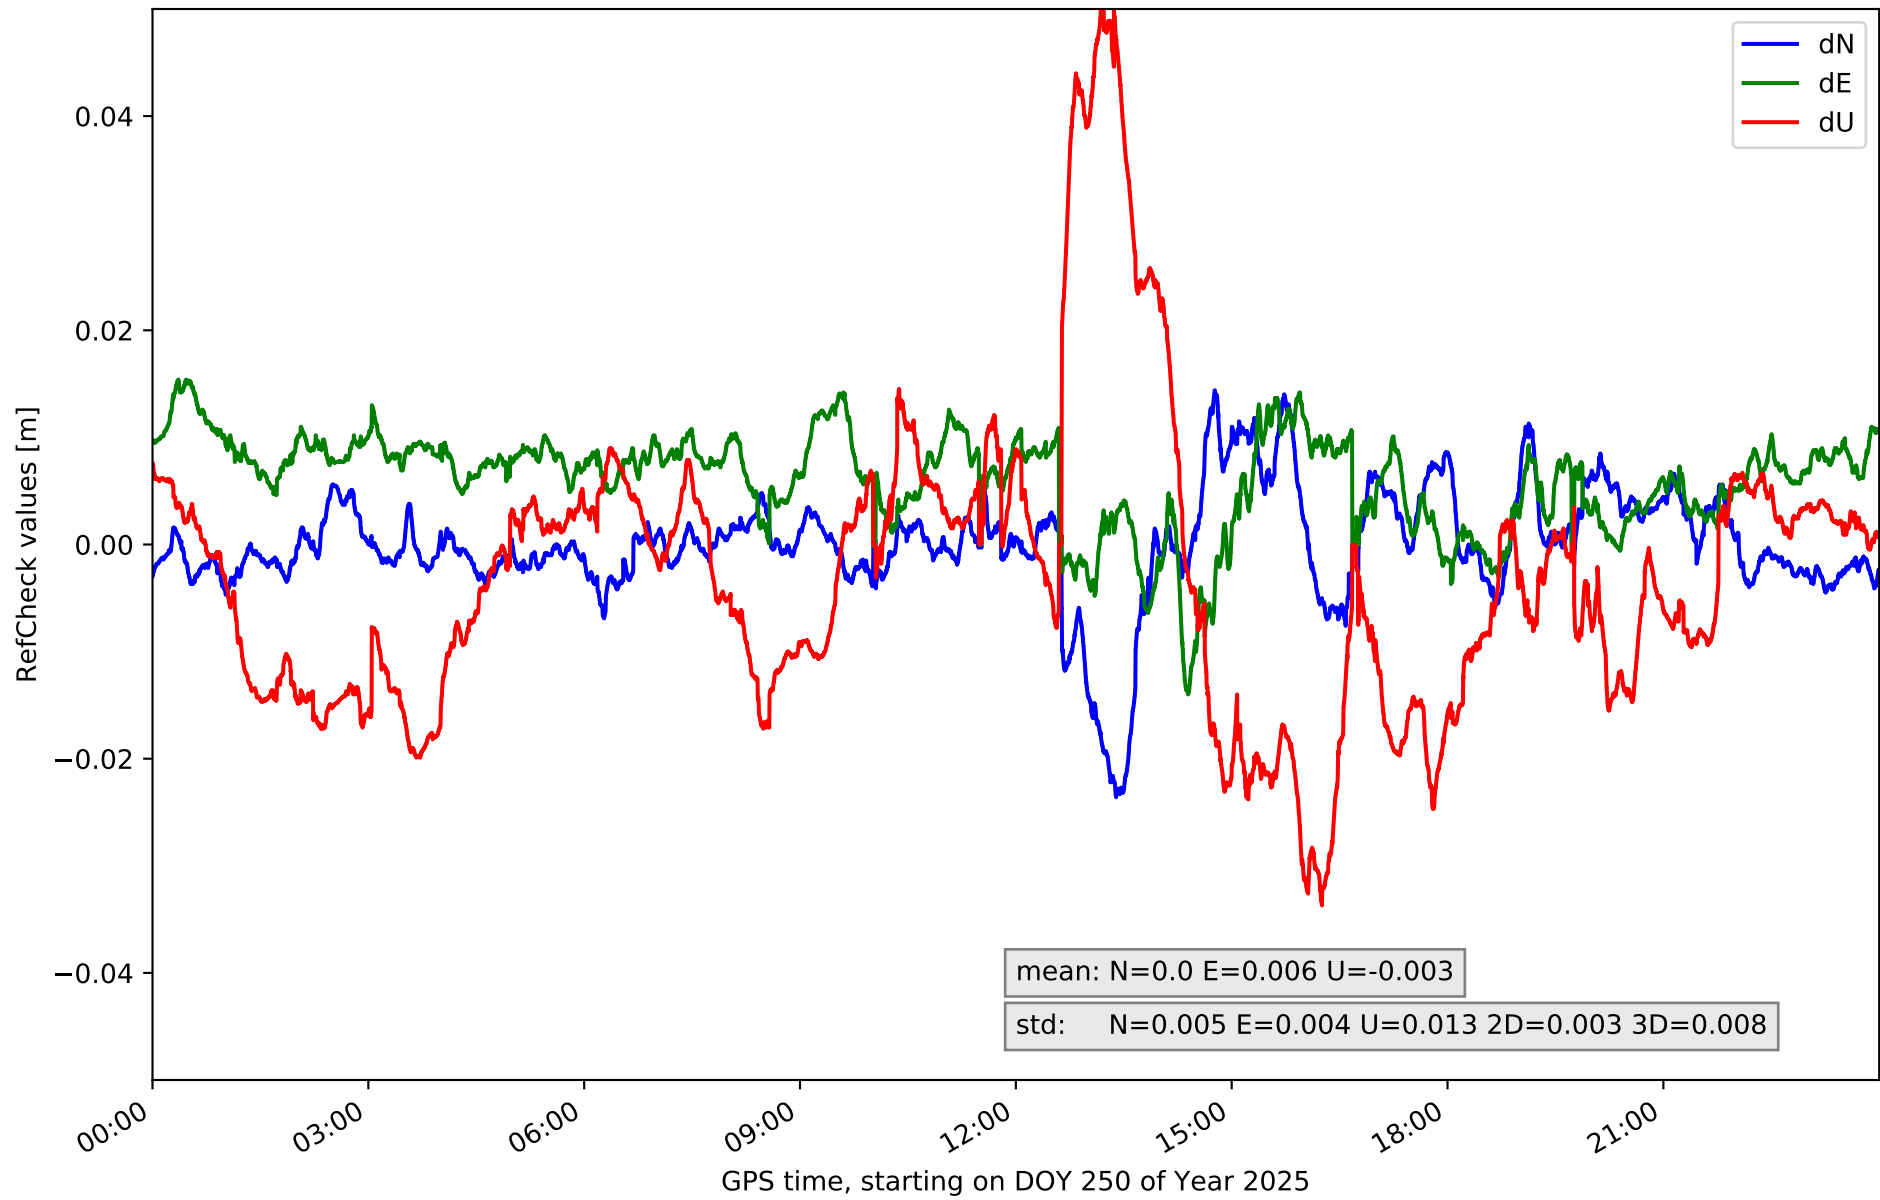


RefCheck for station TARR in network NT10

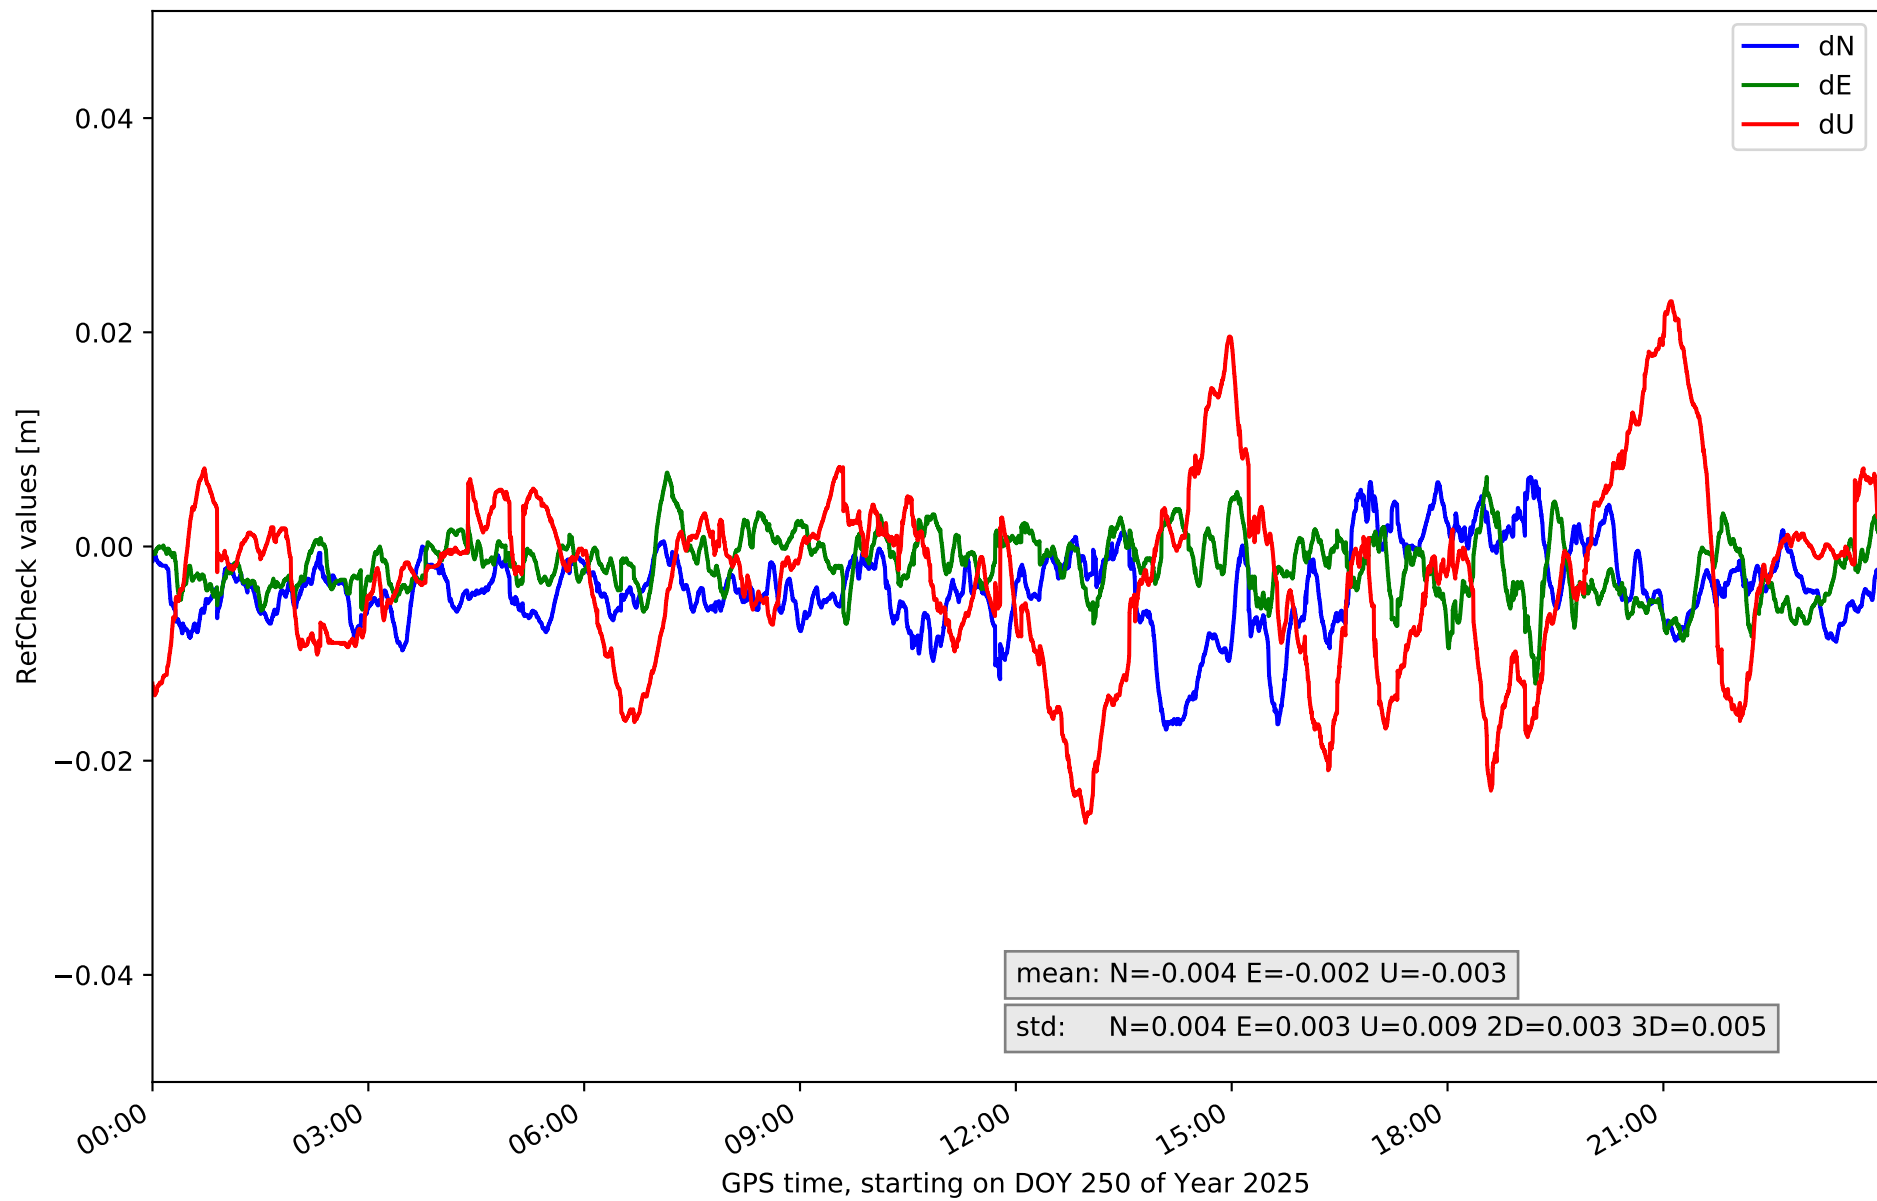

RefCheck for station TRRG in network NT10

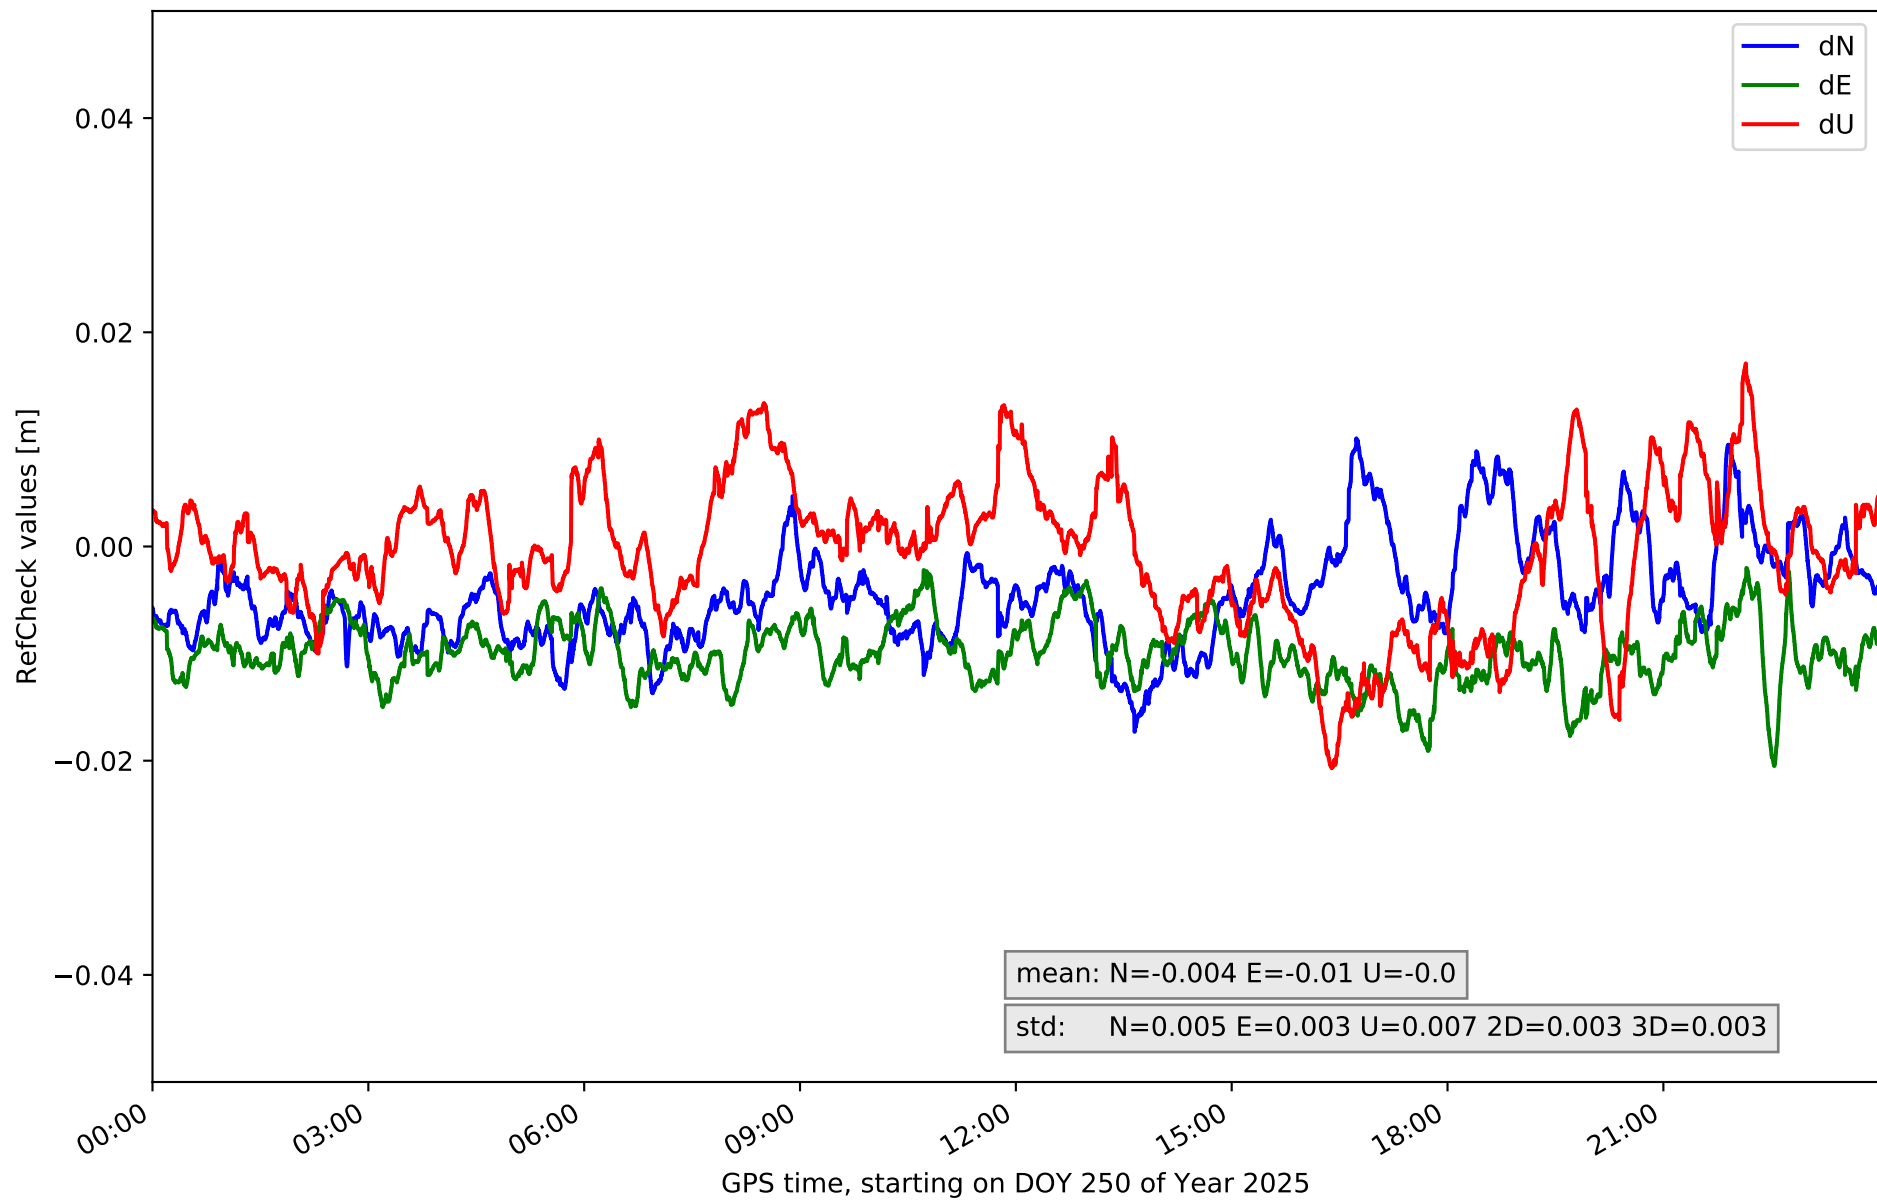

RefCheck for station VRO2 in network NT10

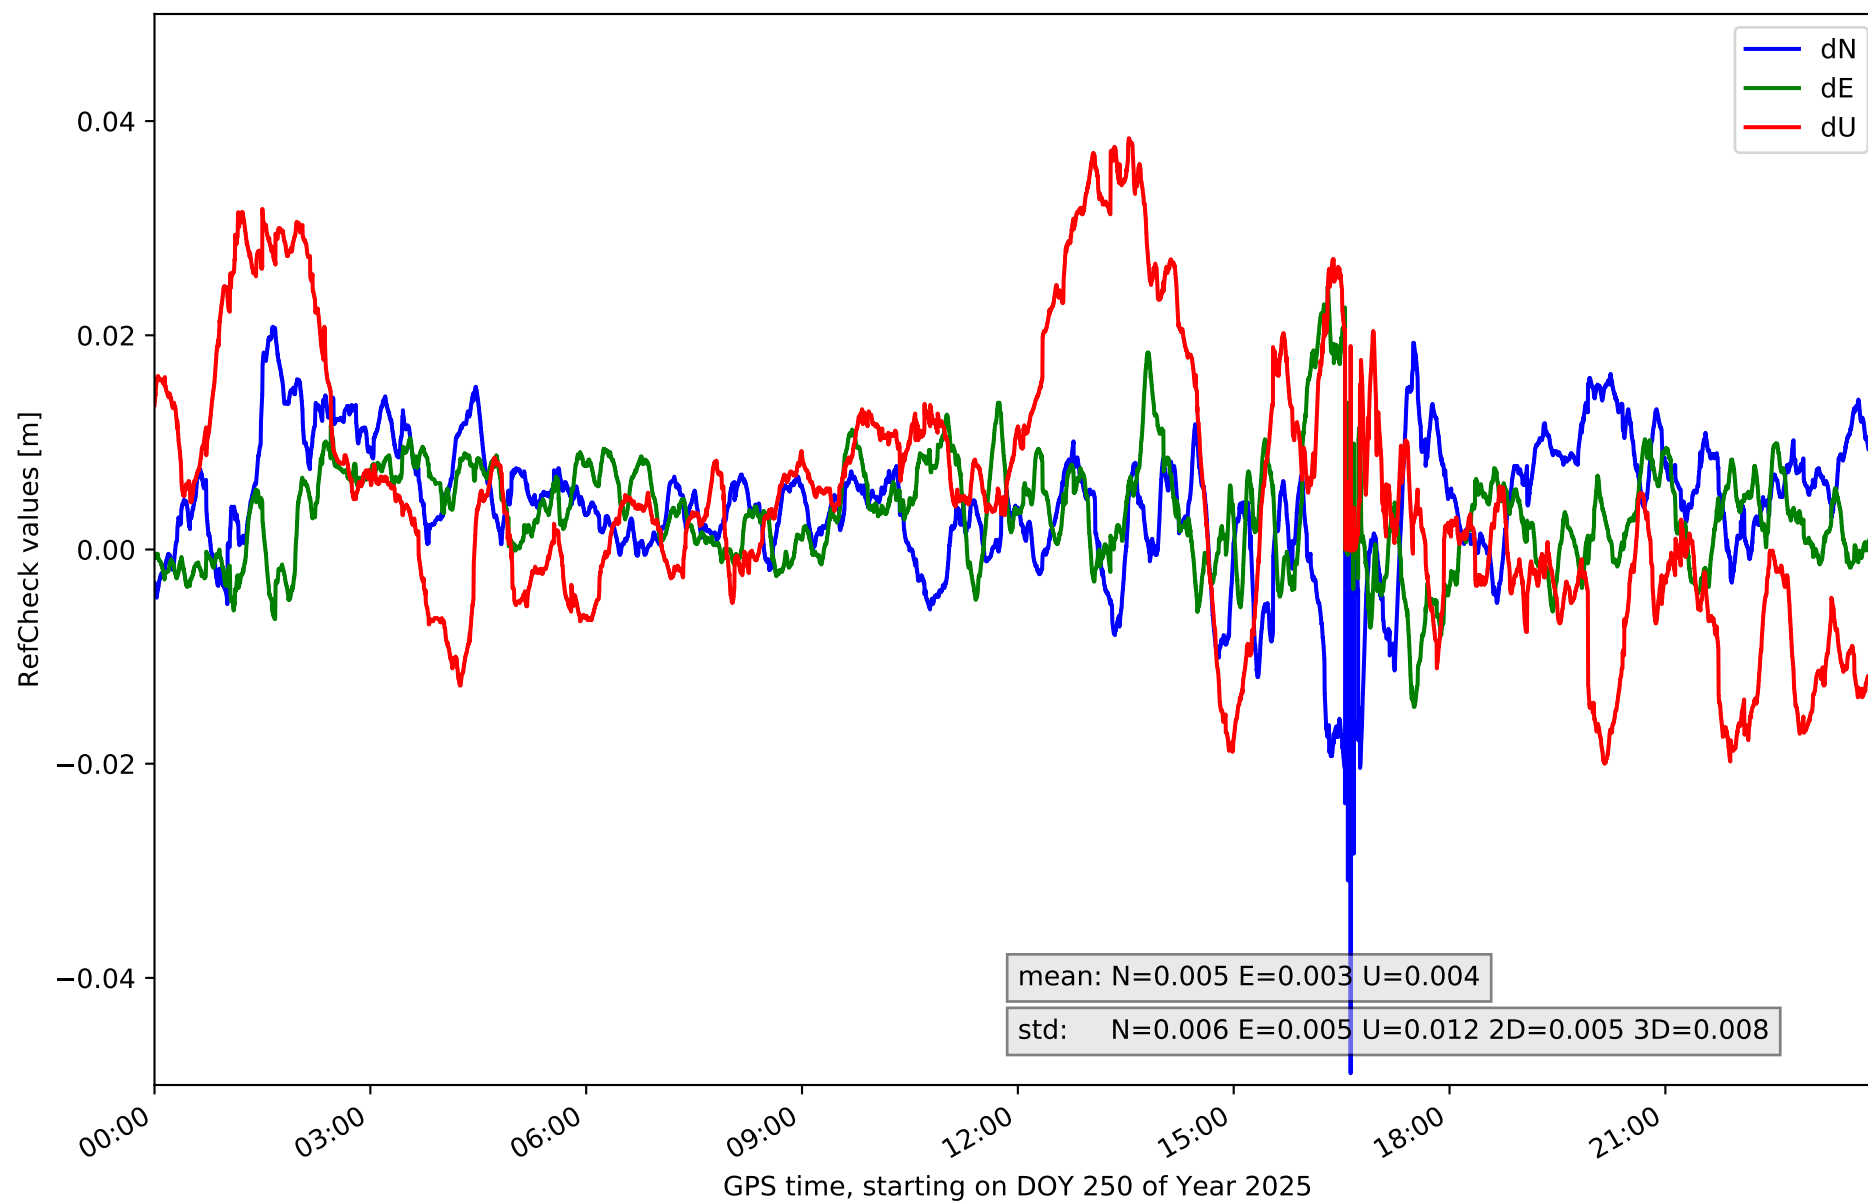

RefCheck values for network NT10

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
BCL1	-0.015	0.009	0.004	-0.01	0.011	0.003	-0.023	0.004	0.006	0.003	0.005	7349	10.9	6963	10.3
BCLN	-0.021	0.012	0.004	-0.016	0.006	0.003	-0.06	0.029	0.009	0.003	0.007	12358	18.3	6506	9.6
BELL	-0.022	0.014	0.004	-0.024	0.01	0.004	-0.005	0.037	0.008	0.004	0.008	6292	9.3	11801	17.4
BINE	-0.025	0.008	0.005	-0.02	0.01	0.004	-0.025	0.029	0.008	0.004	0.006	9844	14.6	4112	6.1
CREU	-0.011	0.013	0.005	-0.009	0.011	0.004	-0.019	0.03	0.009	0.003	0.005	5550	8.2	3523	5.2
EBRE	-0.005	0.017	0.004	-0.007	0.015	0.003	-0.024	0.029	0.01	0.003	0.006	17817	26.3	9065	13.4
EBRO	-0.003	0.027	0.004	-0.019	0.015	0.004	-0.022	0.027	0.009	0.004	0.006	31886	47.1	11916	17.6
ESCO	-0.023	0.015	0.004	-0.011	0.011	0.005	-0.025	0.034	0.008	0.003	0.005	3613	5.3	3839	5.7
GRAU	-0.018	0.022	0.008	-0.015	0.015	0.004	-0.026	0.025	0.01	0.005	0.006	23414	34.6	9072	13.4
MEQU	-0.011	0.026	0.006	-0.017	0.005	0.004	-0.016	0.025	0.008	0.004	0.005	19774	29.2	4449	6.6
OLOT	-0.016	0.016	0.007	-0.015	0.024	0.006	-0.024	0.017	0.009	0.004	0.006	21307	31.5	12732	18.8
PUIG	-0.024	0.014	0.005	-0.014	0.015	0.004	-0.034	0.051	0.013	0.003	0.008	16415	24.3	10199	15.1
TARR	-0.017	0.006	0.004	-0.013	0.007	0.003	-0.026	0.023	0.009	0.003	0.005	5457	8.1	3412	5.0
TRRG	-0.017	0.01	0.005	-0.021	-0.002	0.003	-0.021	0.017	0.007	0.003	0.003	50380	74.5	2544	3.8
VRO2	-0.049	0.021	0.006	-0.015	0.025	0.005	-0.02	0.038	0.012	0.005	0.008	21008	31.1	11792	17.4
Mean	-0.018	0.015	0.005	-0.015	0.012	0.004	-0.025	0.028	0.009	0.004	0.006	16830.9	24.9	7461.7	11.0
Min/Max	-0.049	0.027	0.008	-0.024	0.025	0.006	-0.06	0.051	0.013	0.005	0.008	50380	74.5	12732	18.8

fixing statistic for network NT10

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.8	95.0	94.0	95.1	91.2
considering satellites with dual-frequency fixed	92.2	92.8	92.4	94.0	88.8
considering all signals separately	92.3	92.8	92.4	94.3	88.0