

summary for network N31T

timeperiod chosen: from 2026-09-03-00:00:00 until 2026-09-03-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 82.9 percent

stations available: 7 of 7


station information:

station FUER:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 76.887
station LALA:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 62.306
station LZ01:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE NETR9	height: 52.693
station LZ02:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 58.039
station LZ03:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 314.762
station MASP:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE NETR9	height: 198.846
station ULP2:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE ALLOY	height: 375.129


Processing rate in network N31T

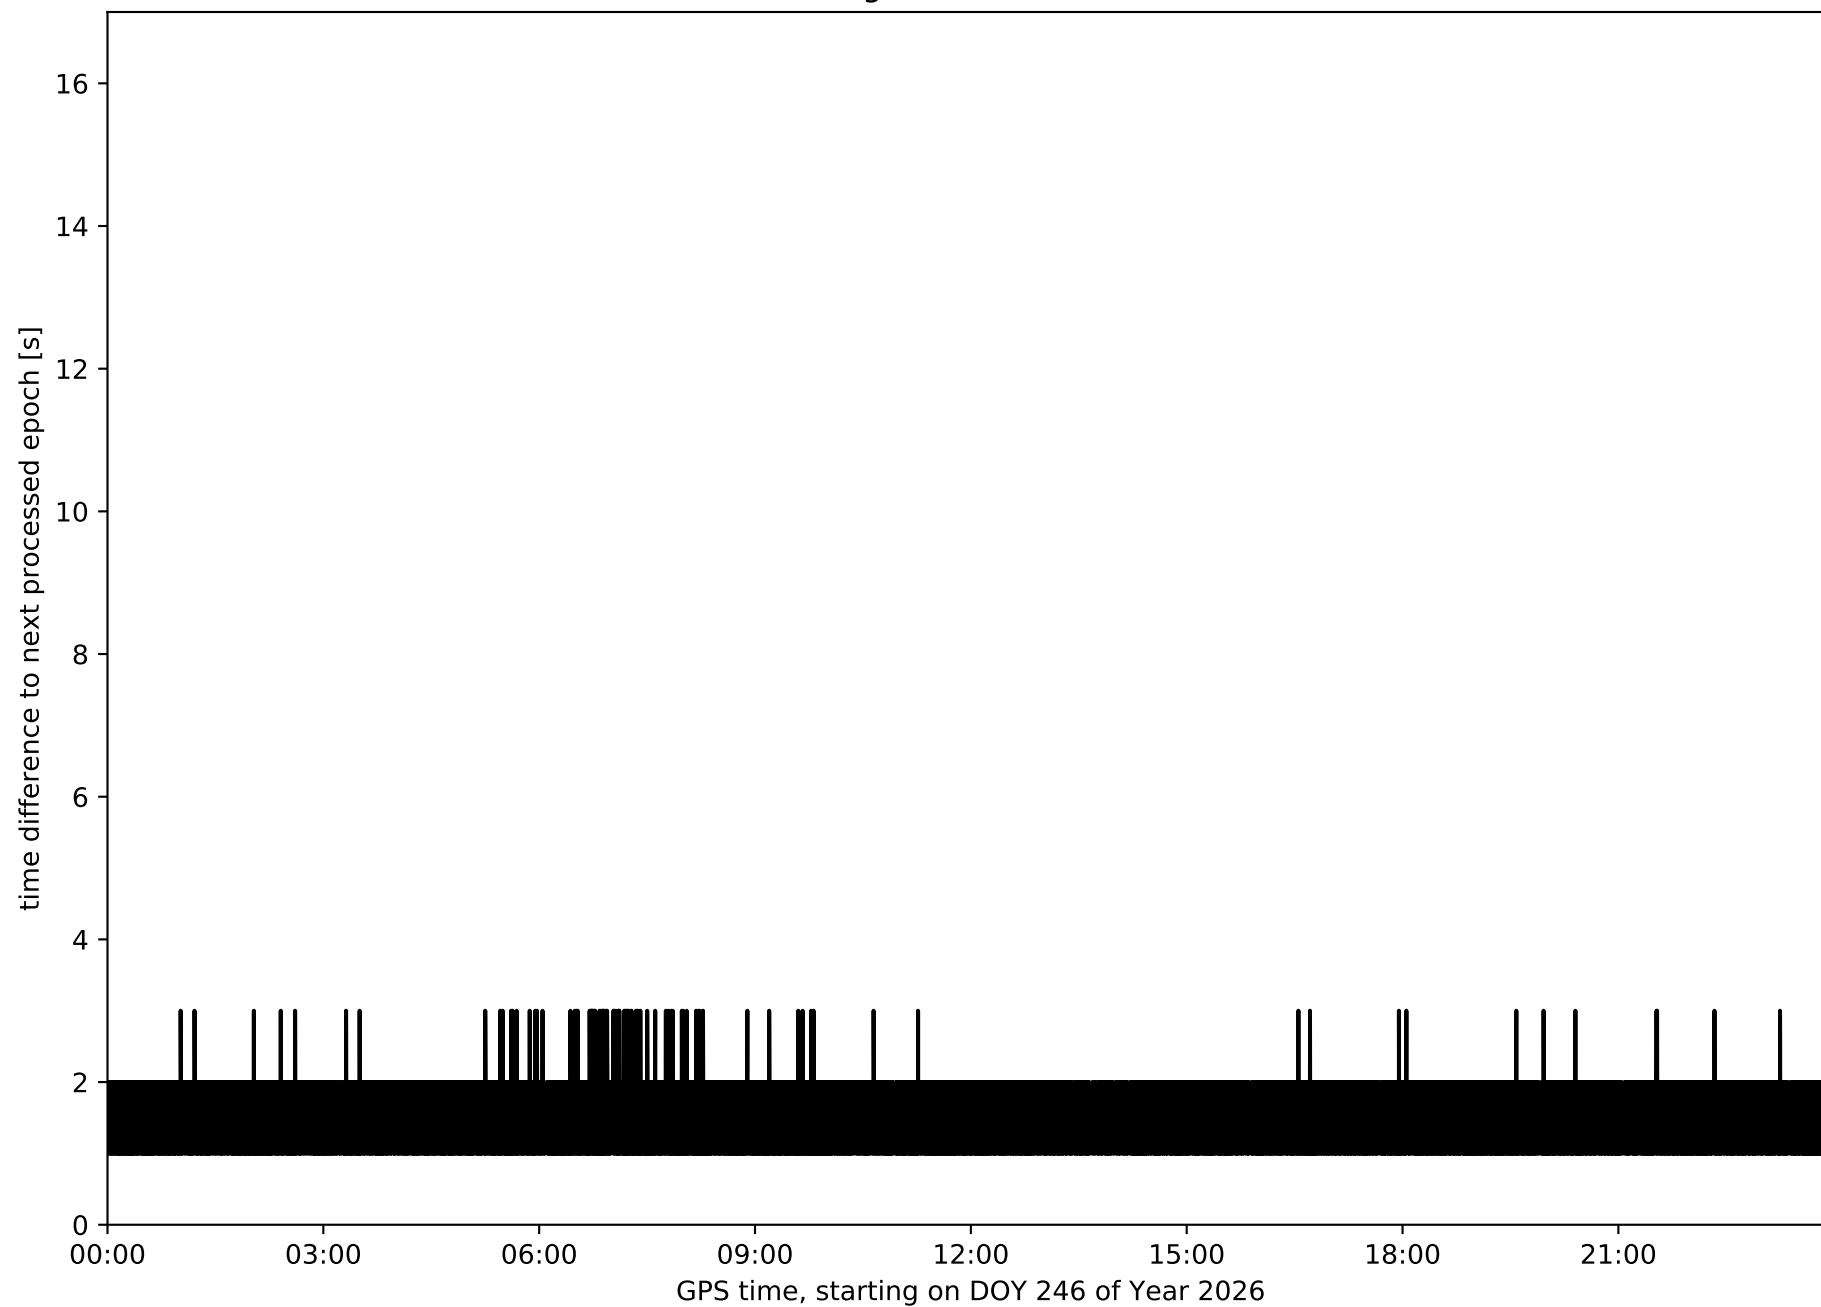


Histogram of the processing rate in network N31T (durations larger 15 seconds neglected)

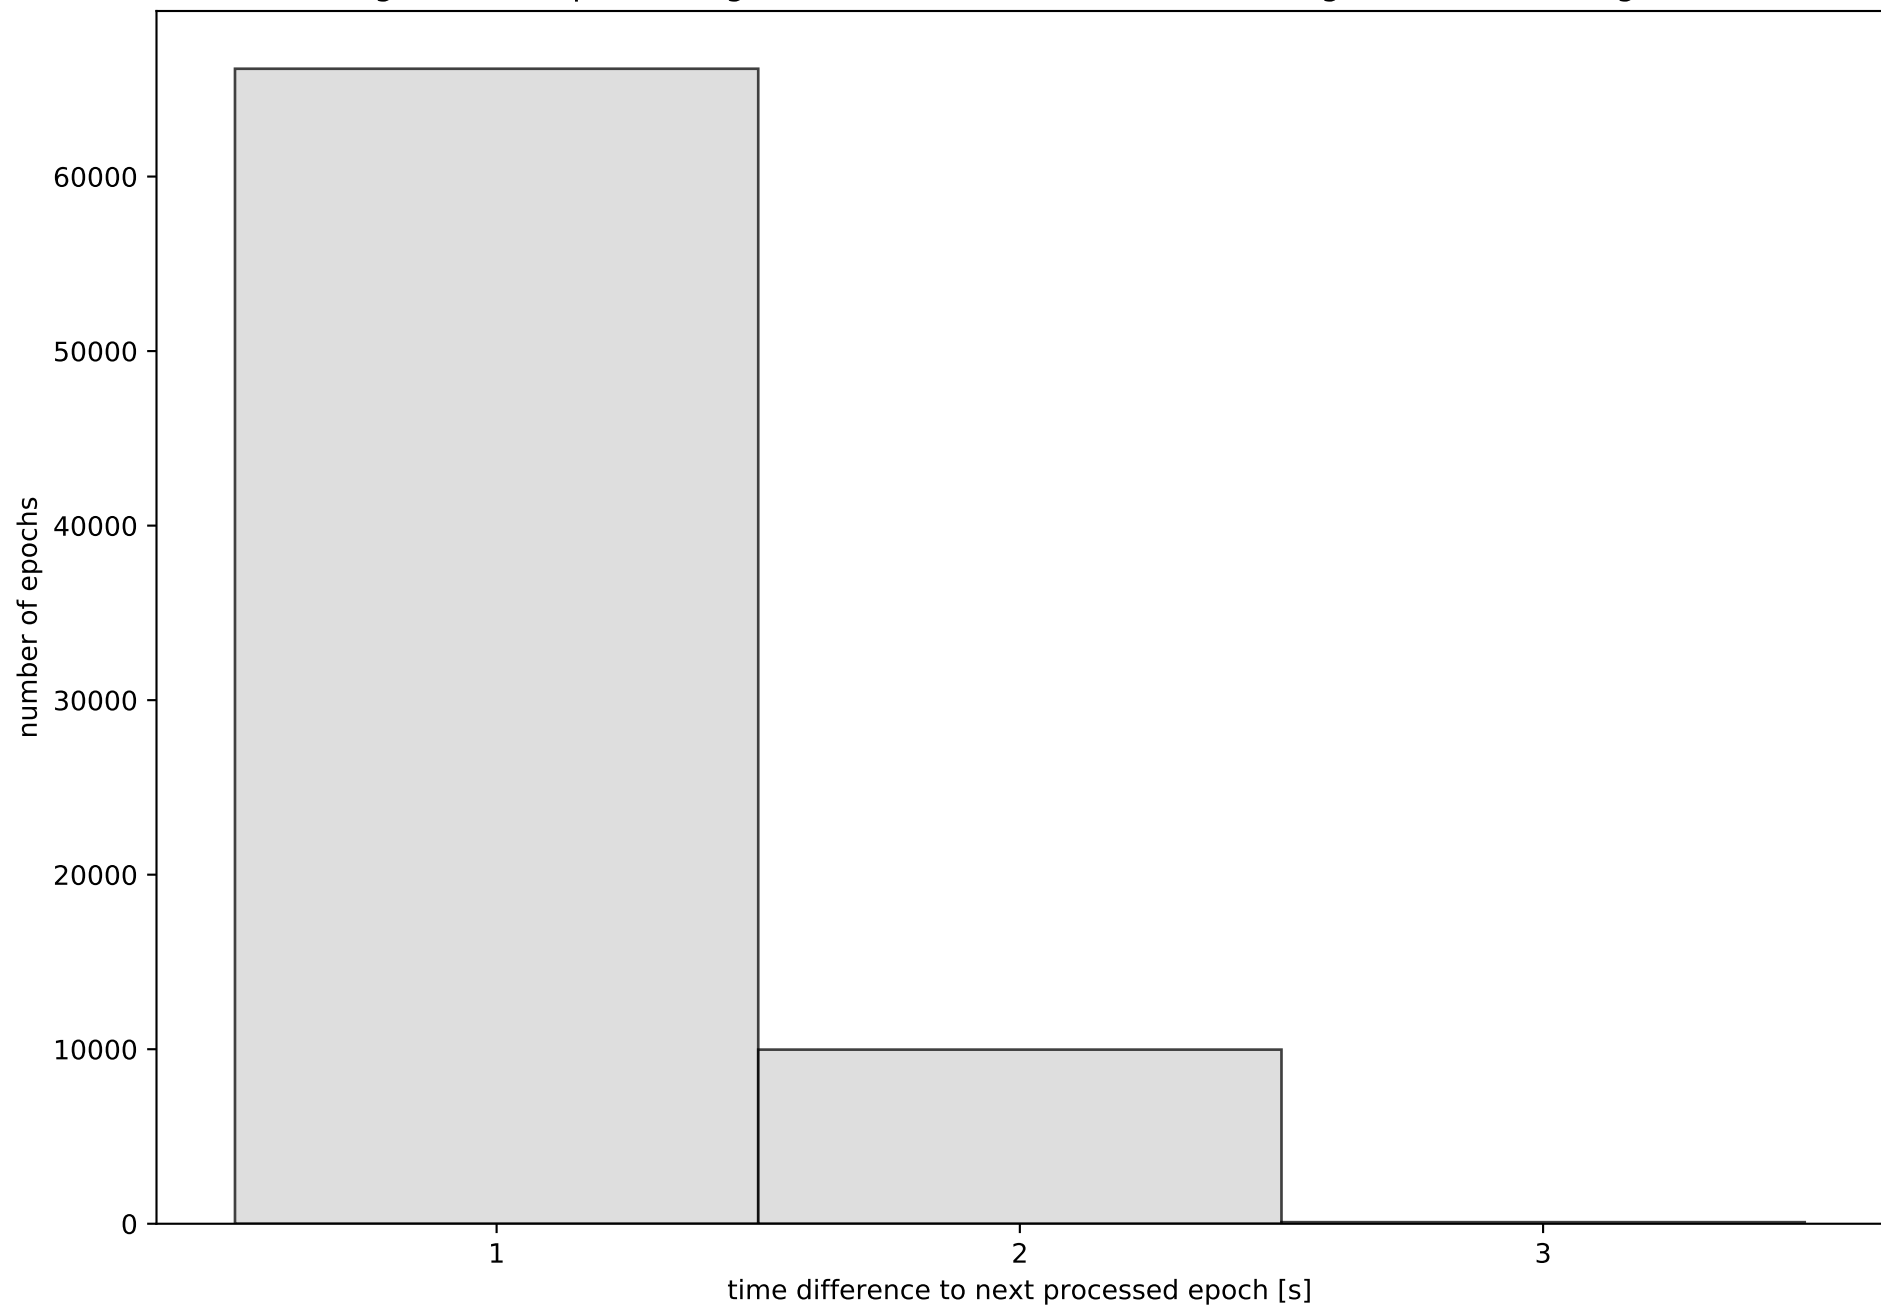


Network N31T with threshold set to 0.3

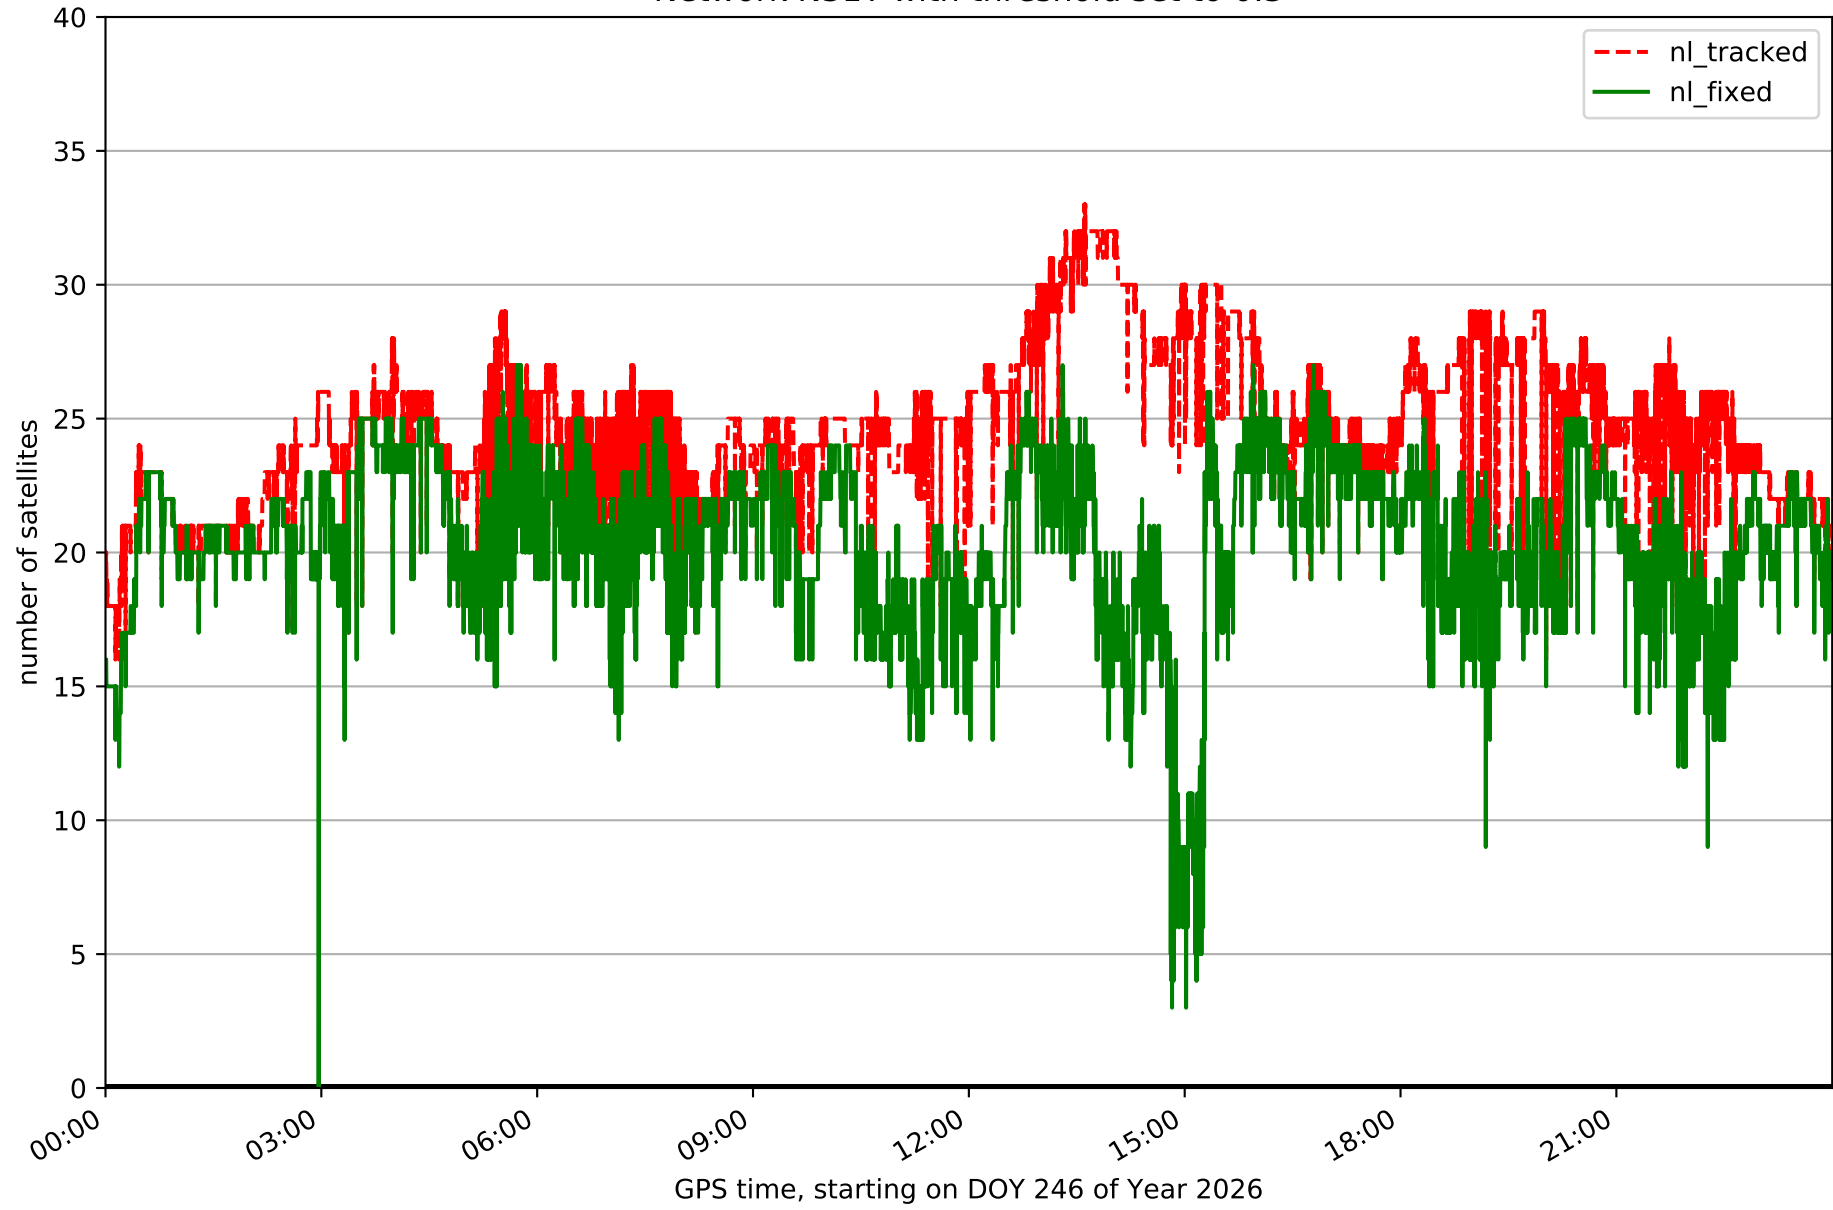


Fixing percentage of satellites in network N31T with threshold set to 0.3

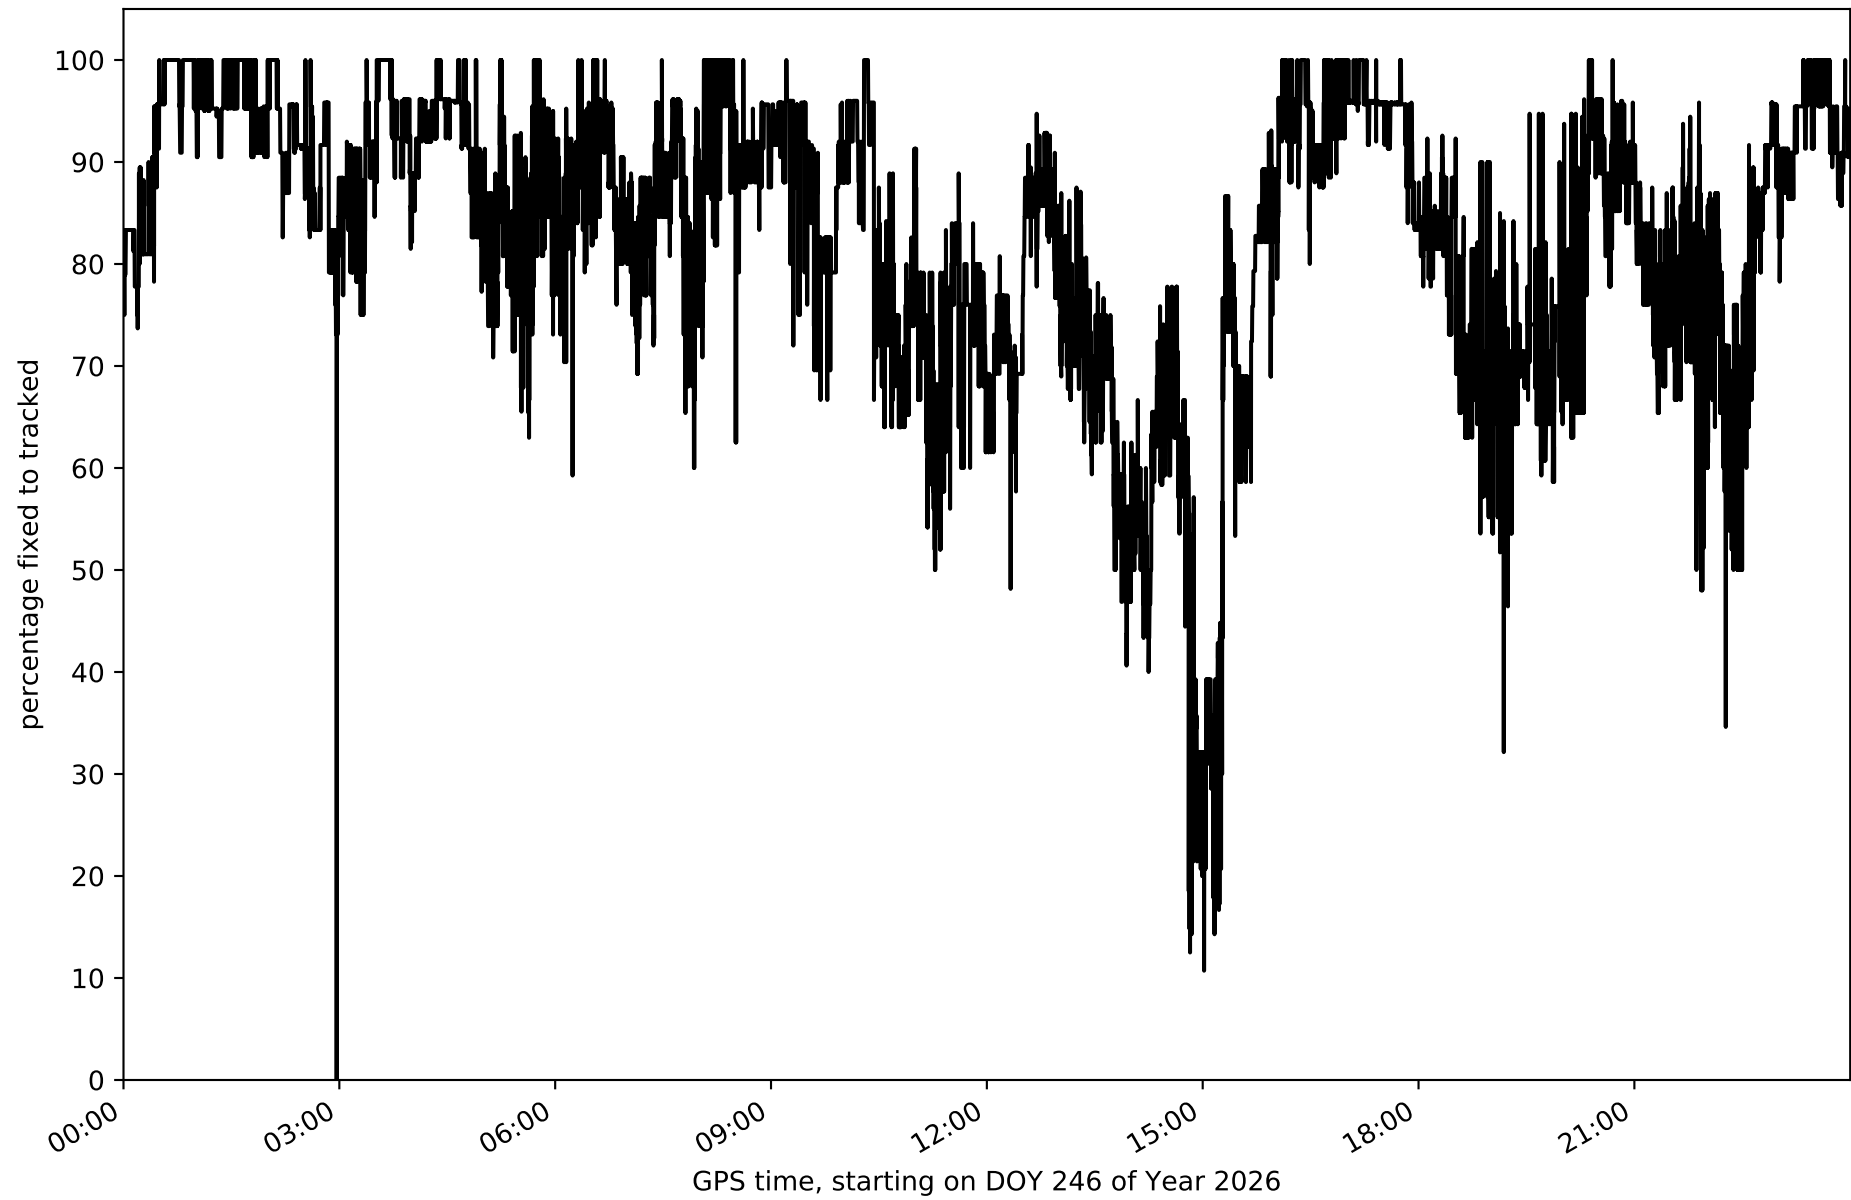


Network N31T - only GPS with threshold set to 0.3

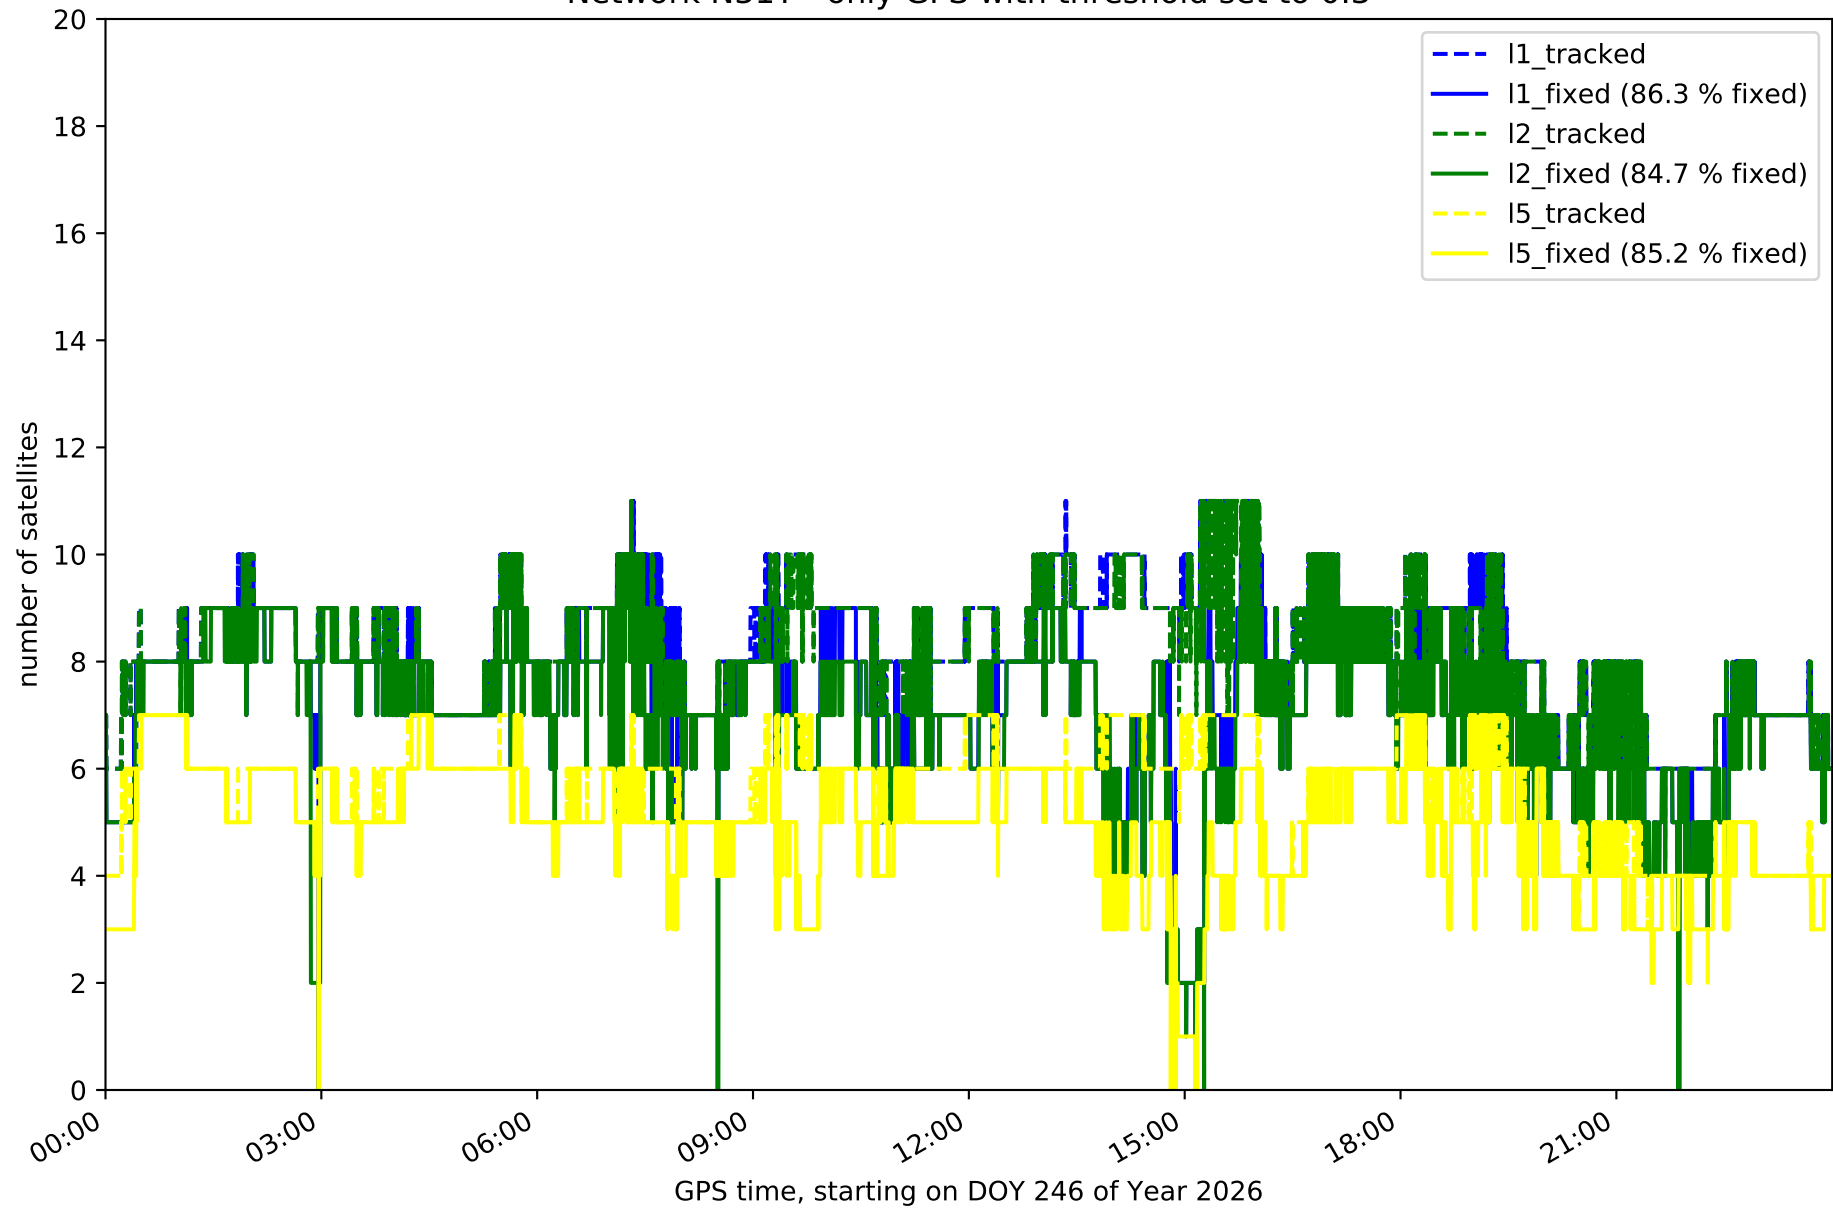


Network N31T - only GLONASS with threshold set to 0.3

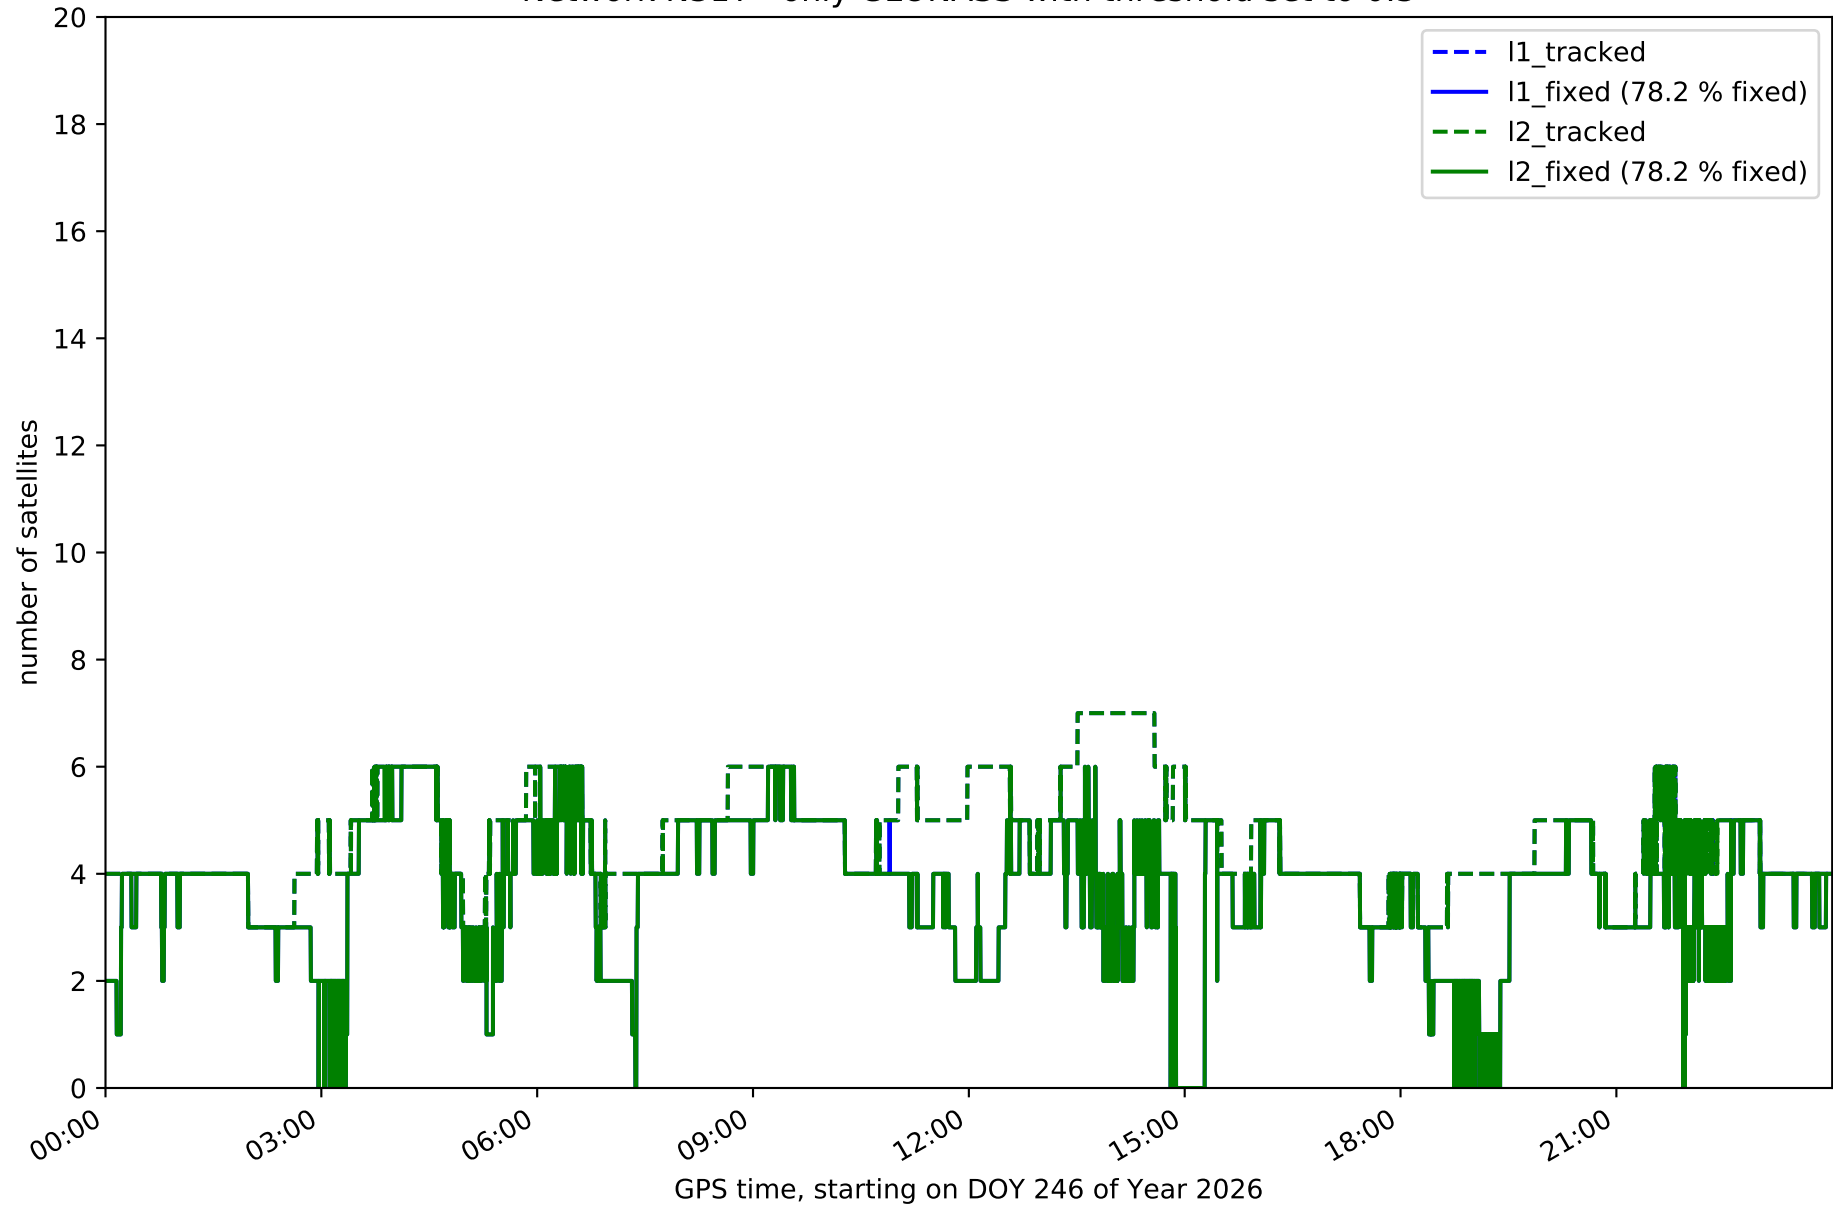


Network N31T - only BDS with threshold set to 0.3

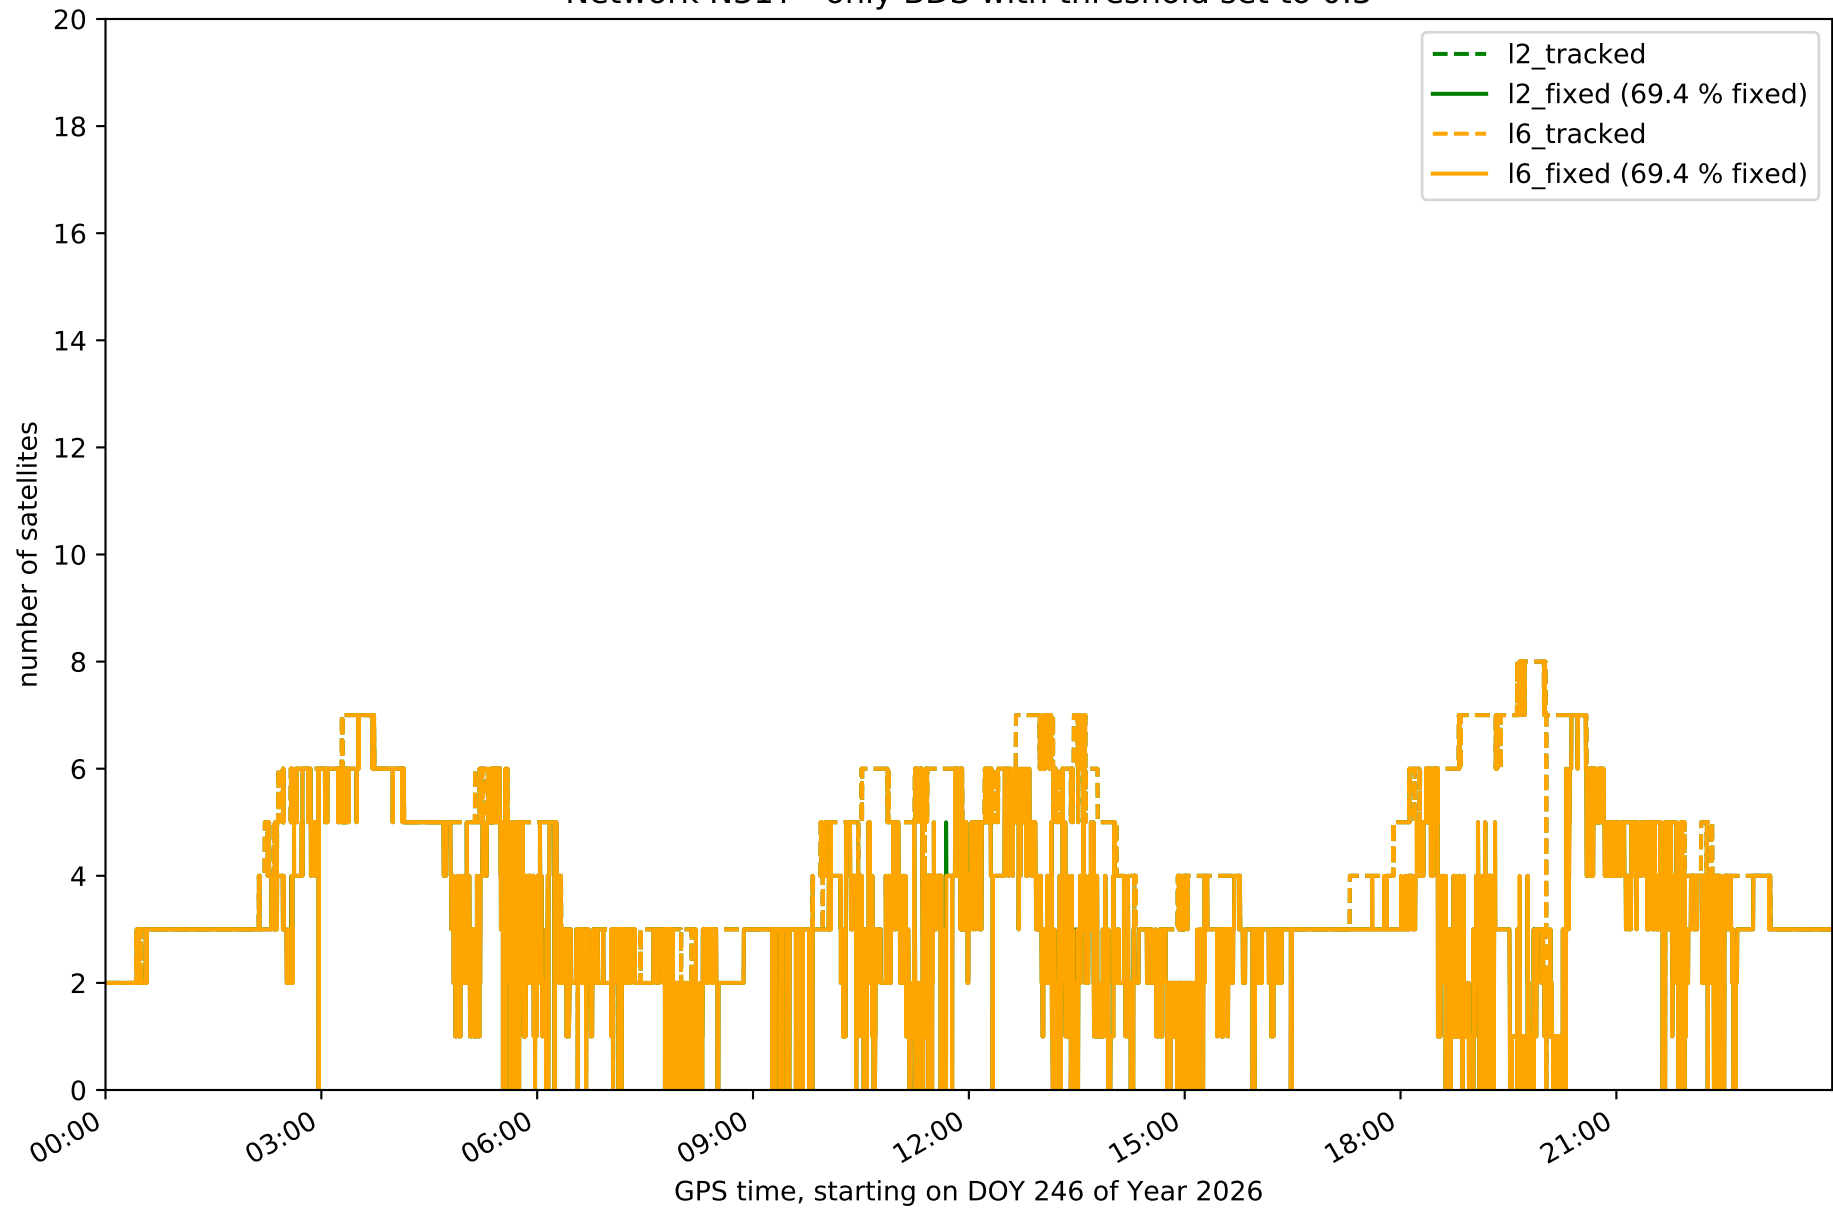


Network N31T - only Galileo with threshold set to 0.3

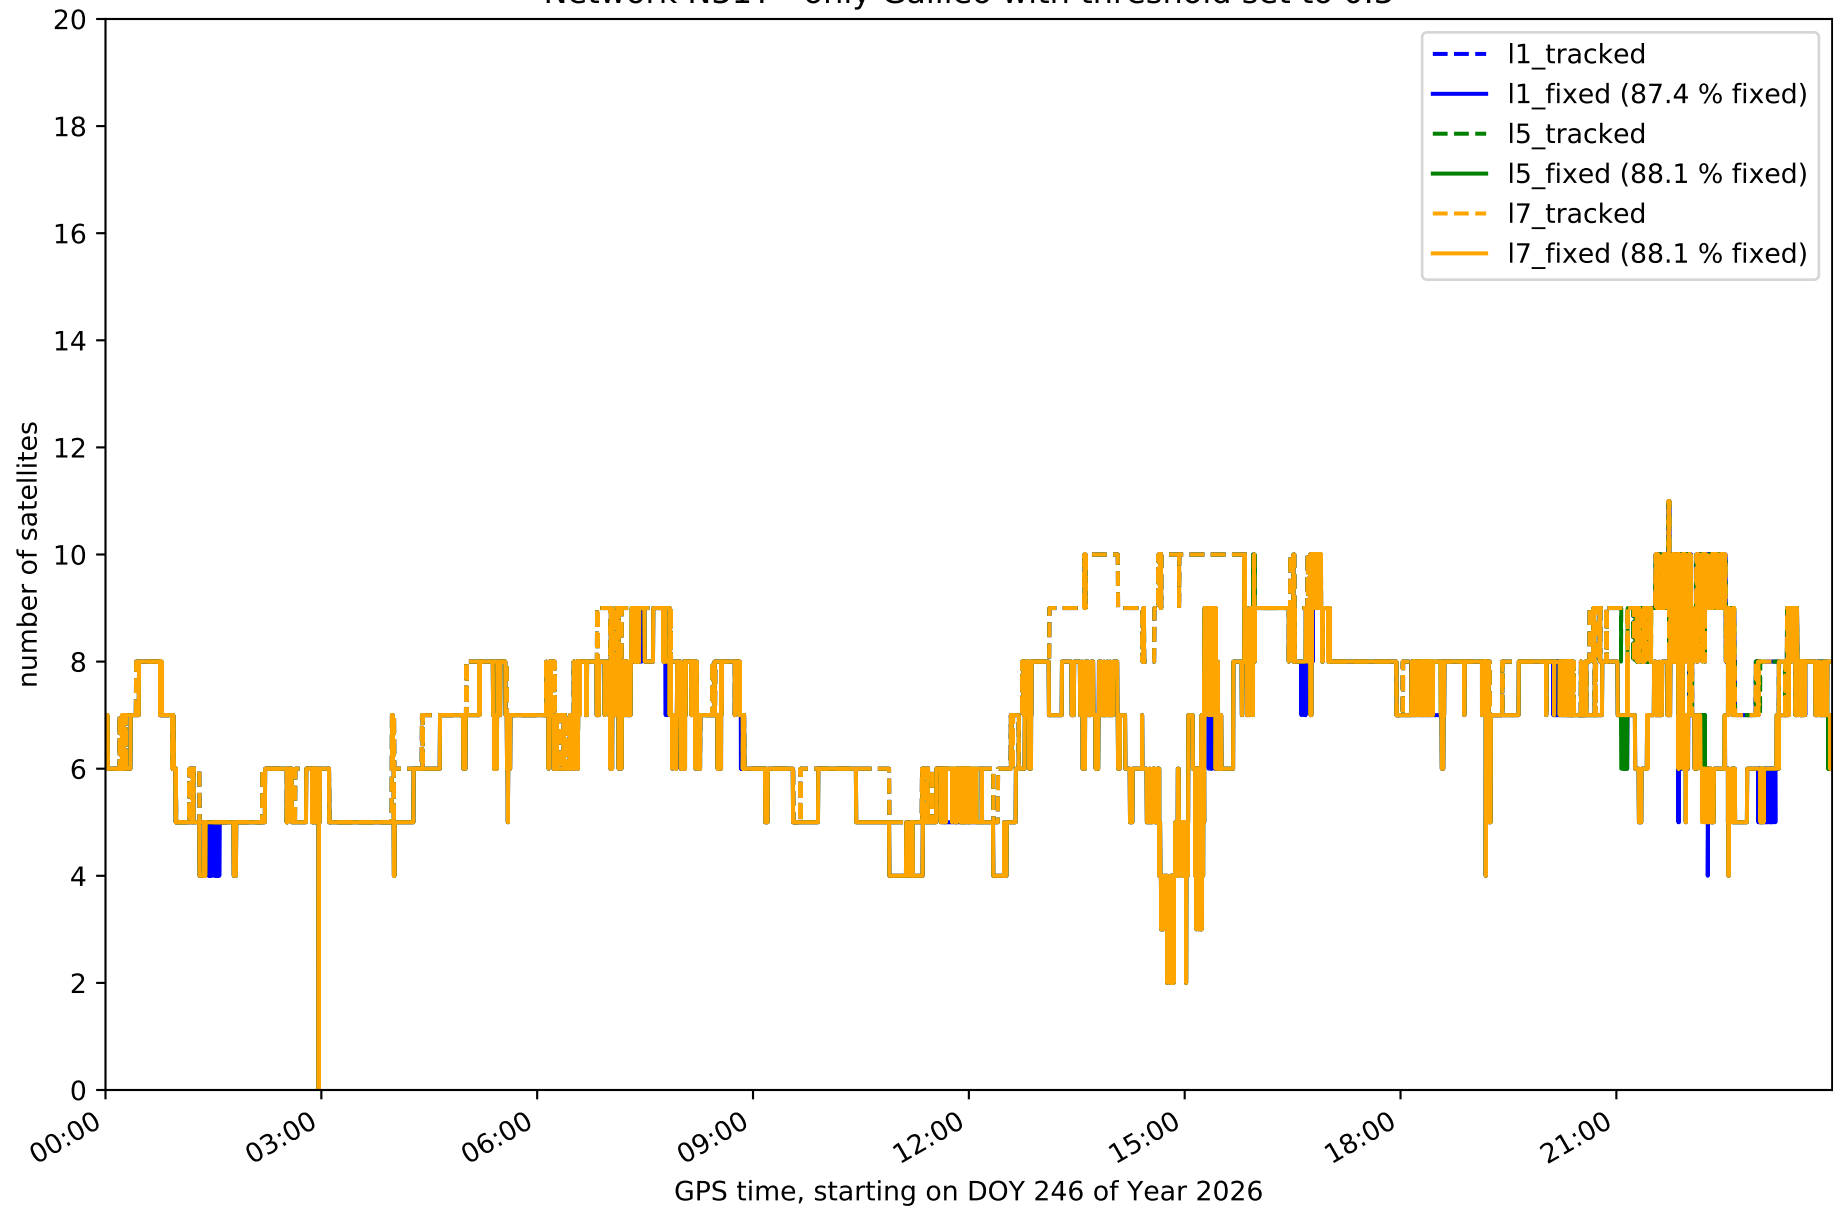


Station FUER in network N31T

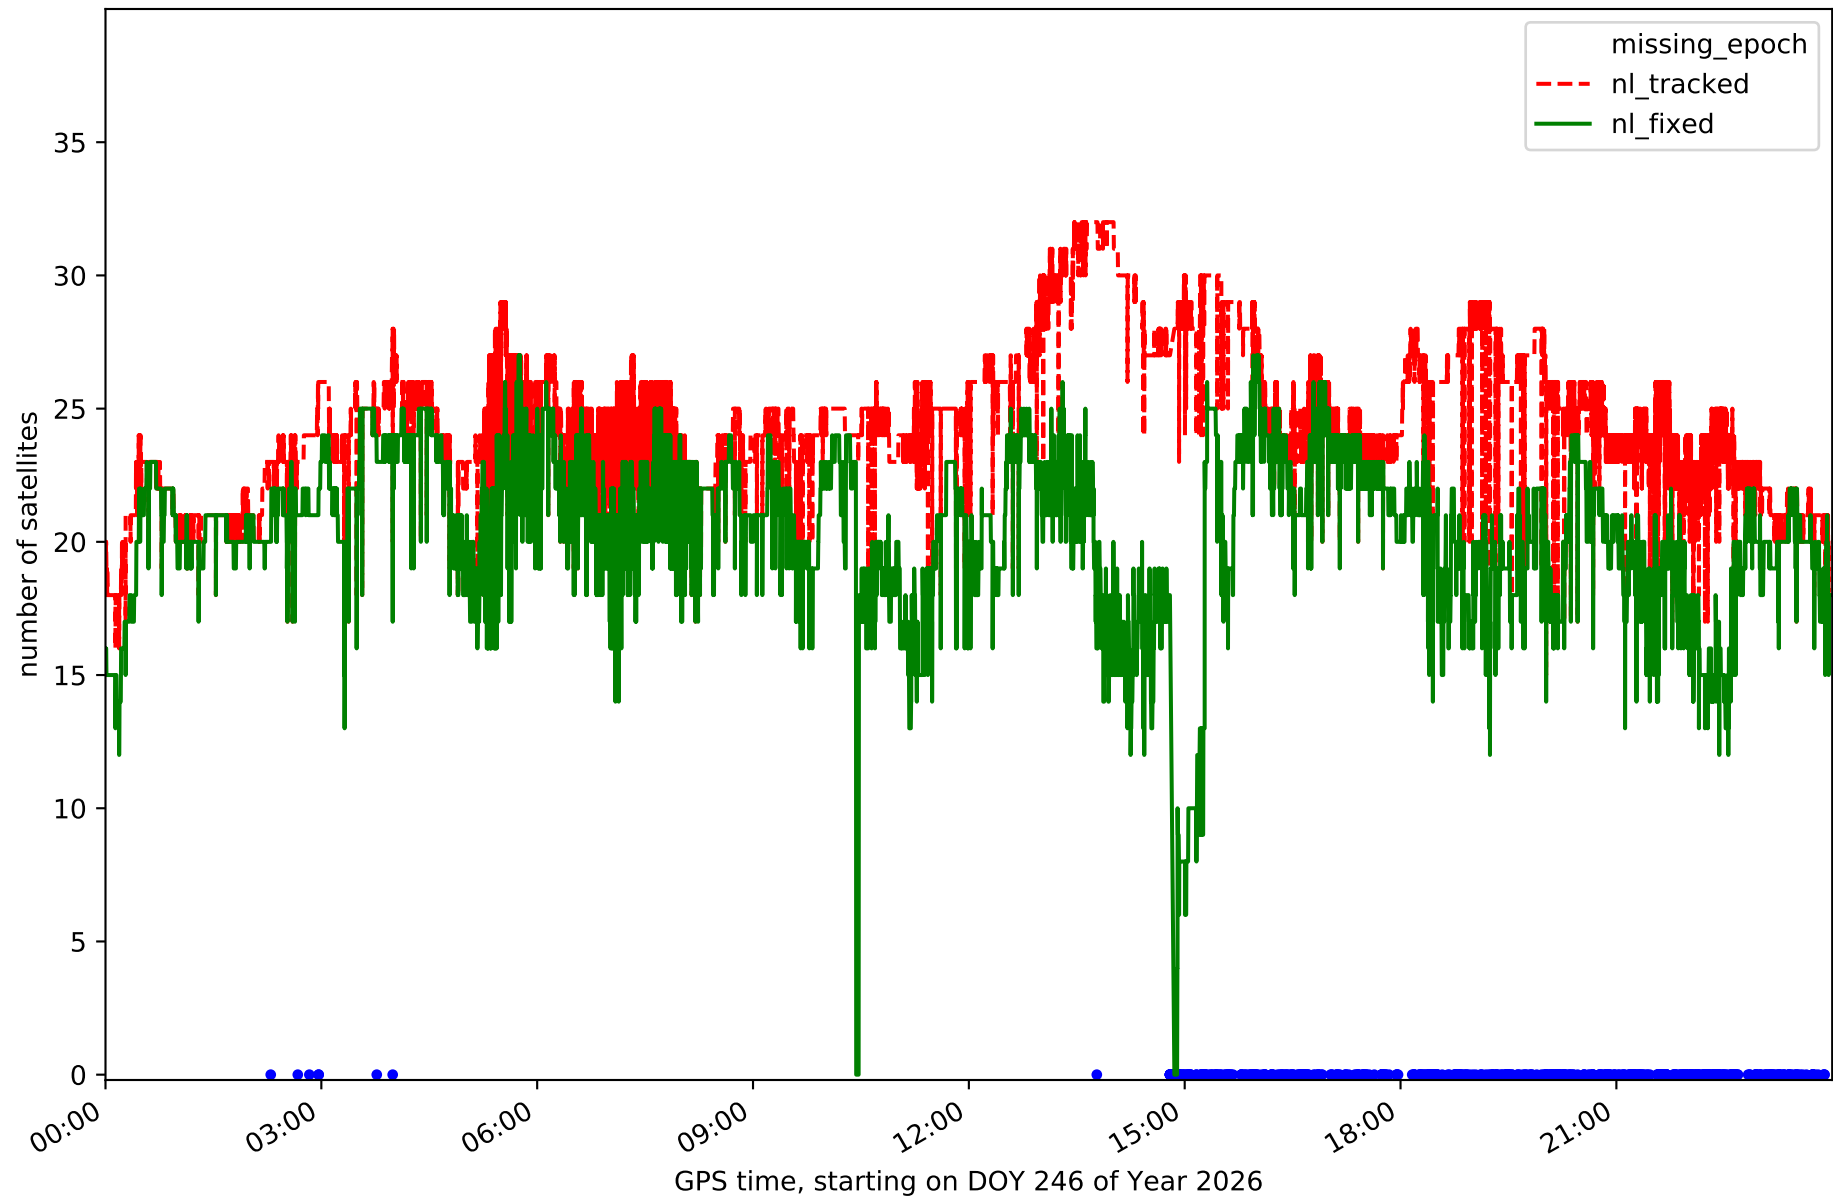


Station LALA in network N31T

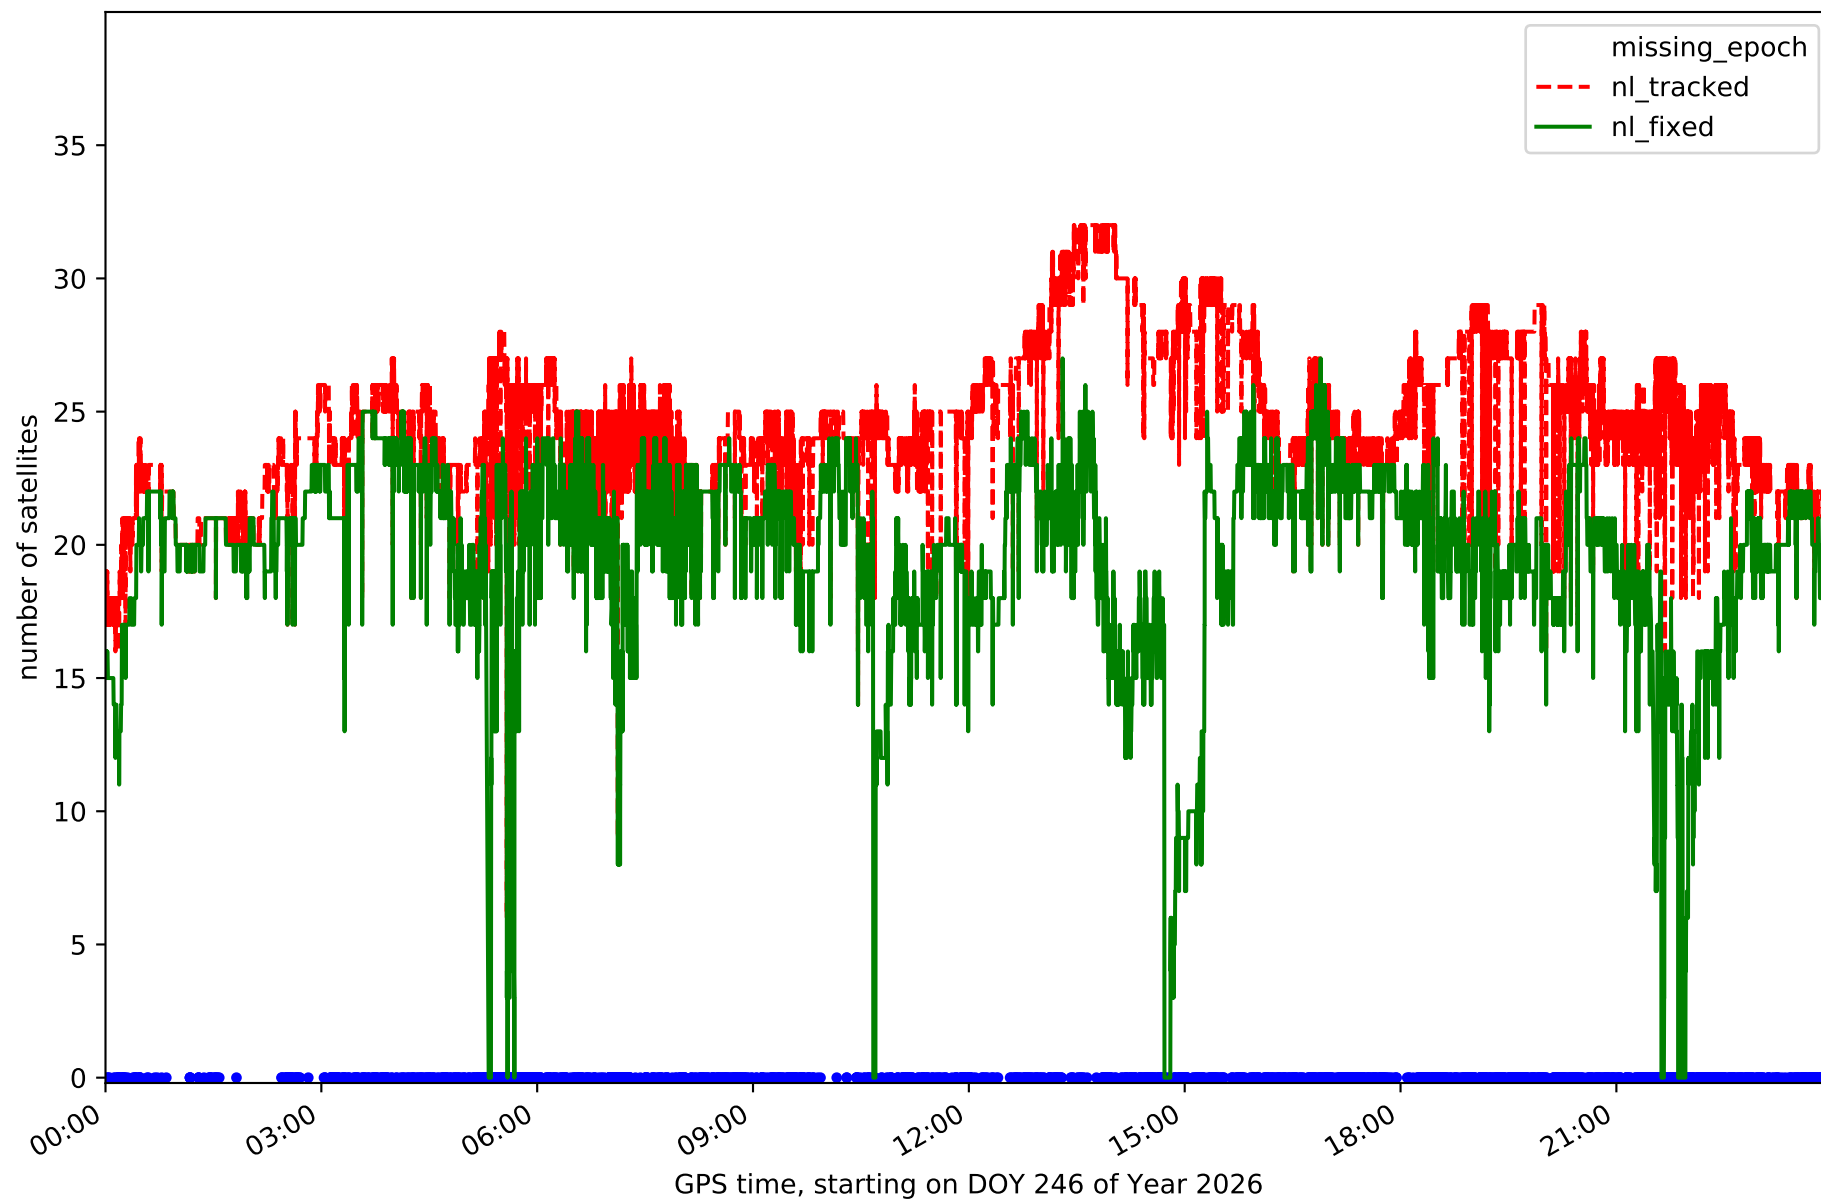


Station LZ01 in network N31T

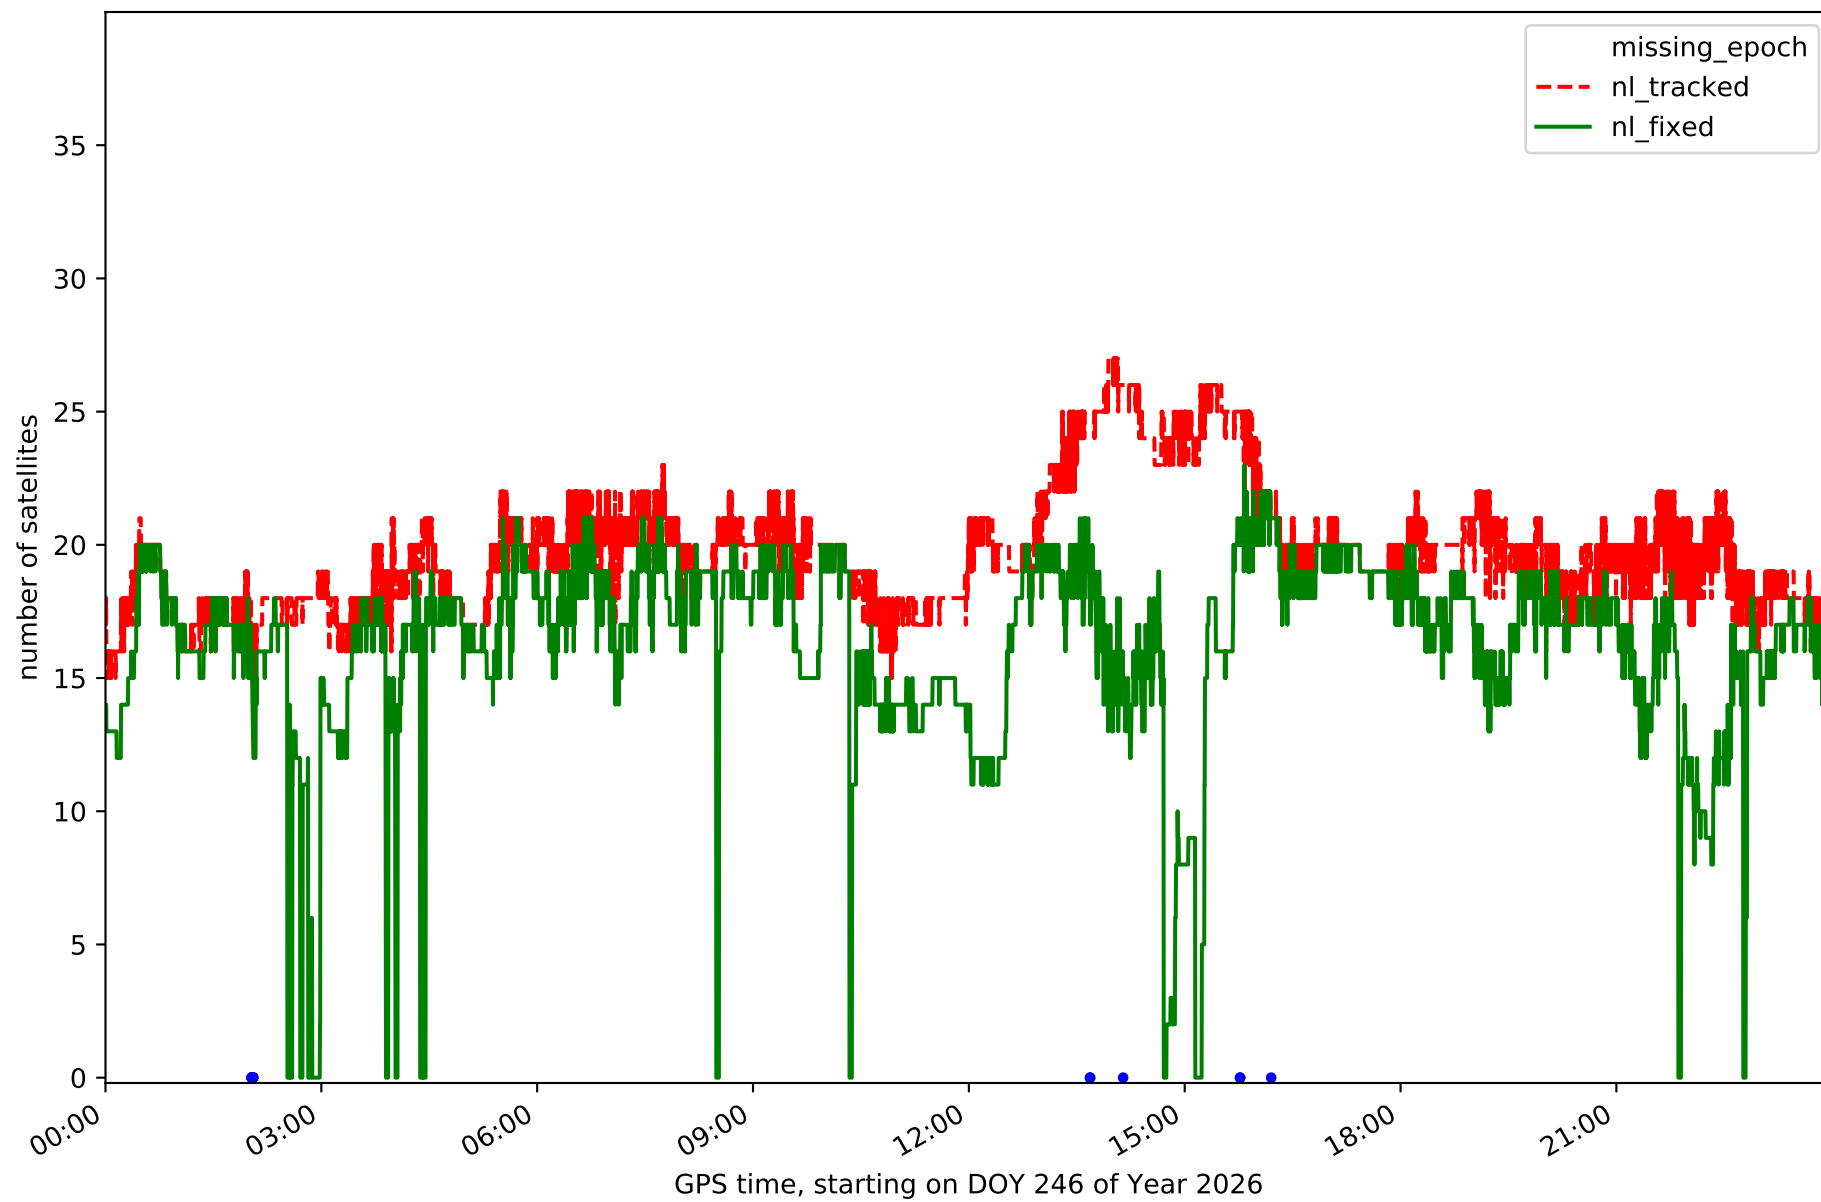


Station LZ02 in network N31T

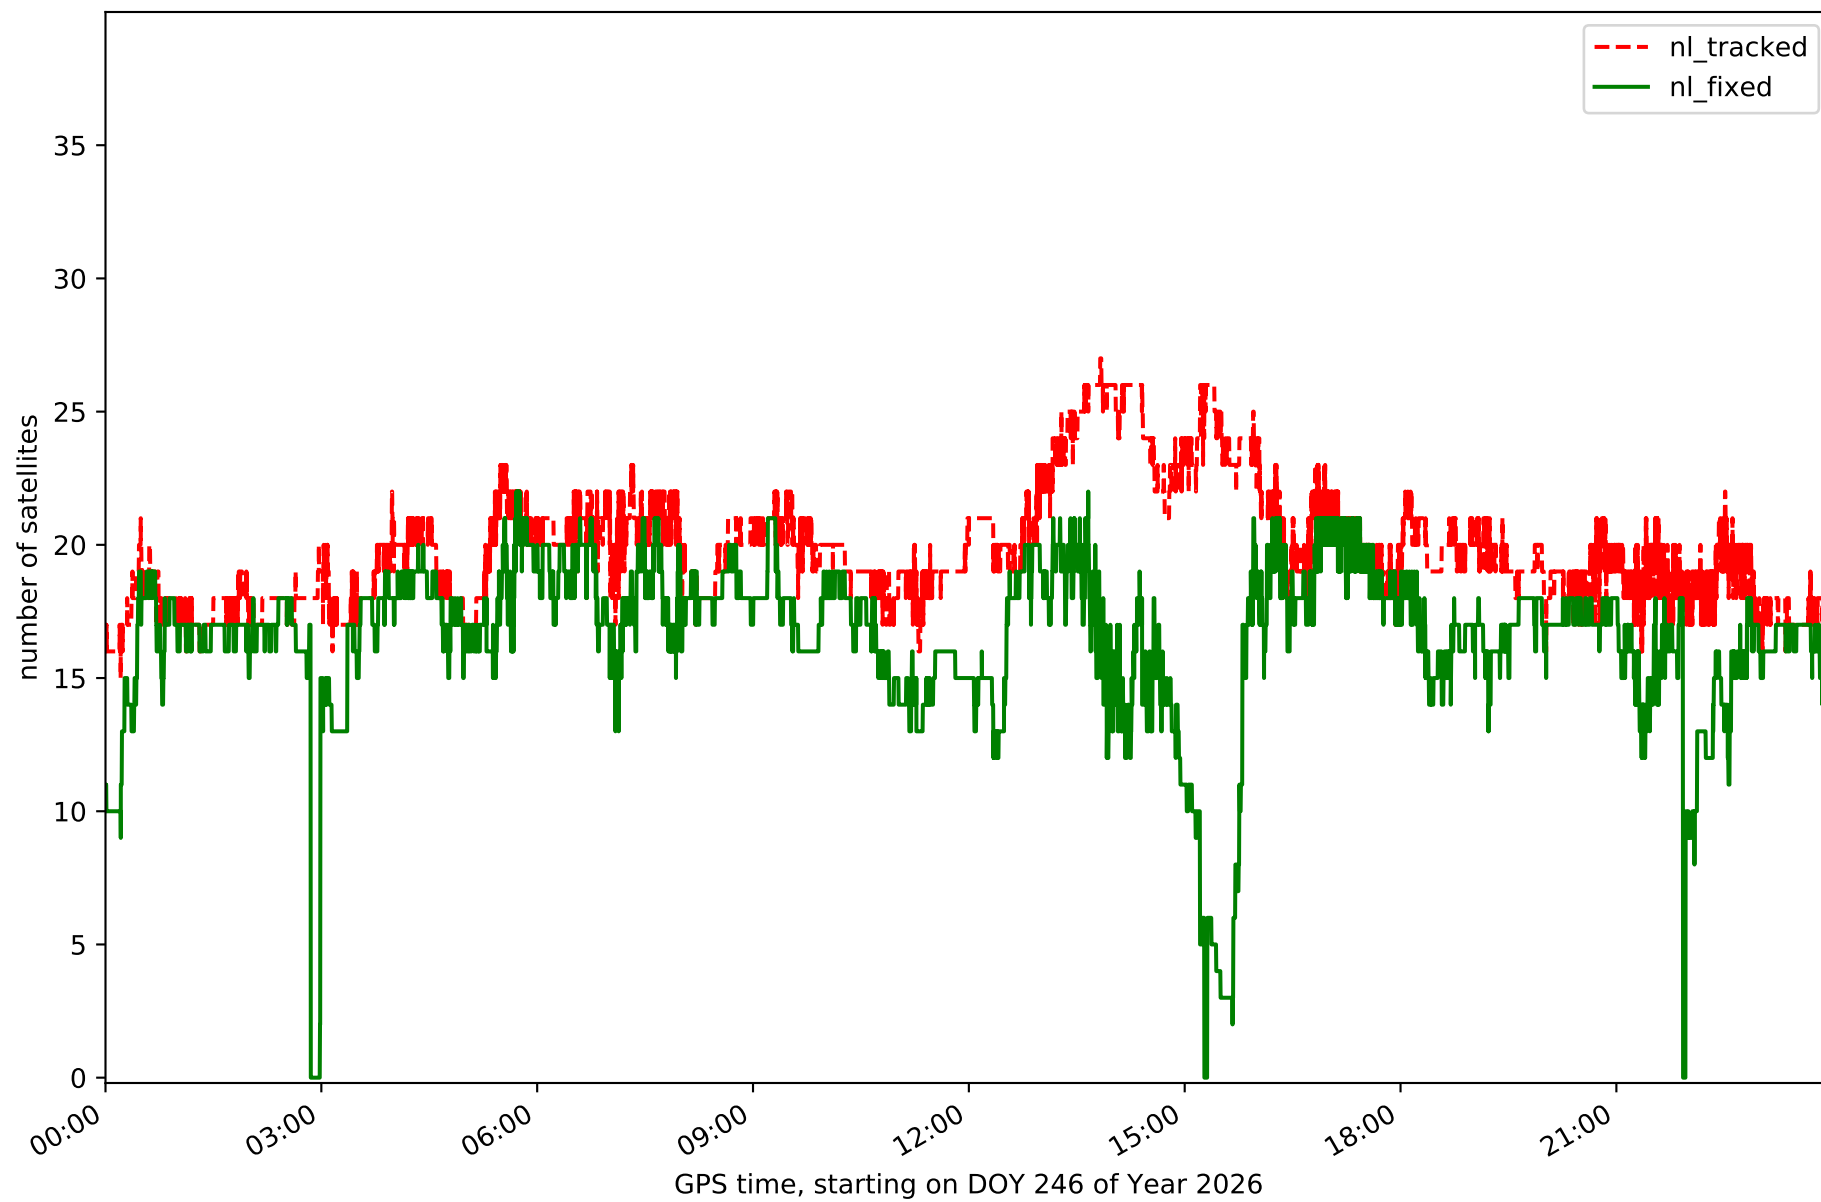


Station LZ03 in network N31T

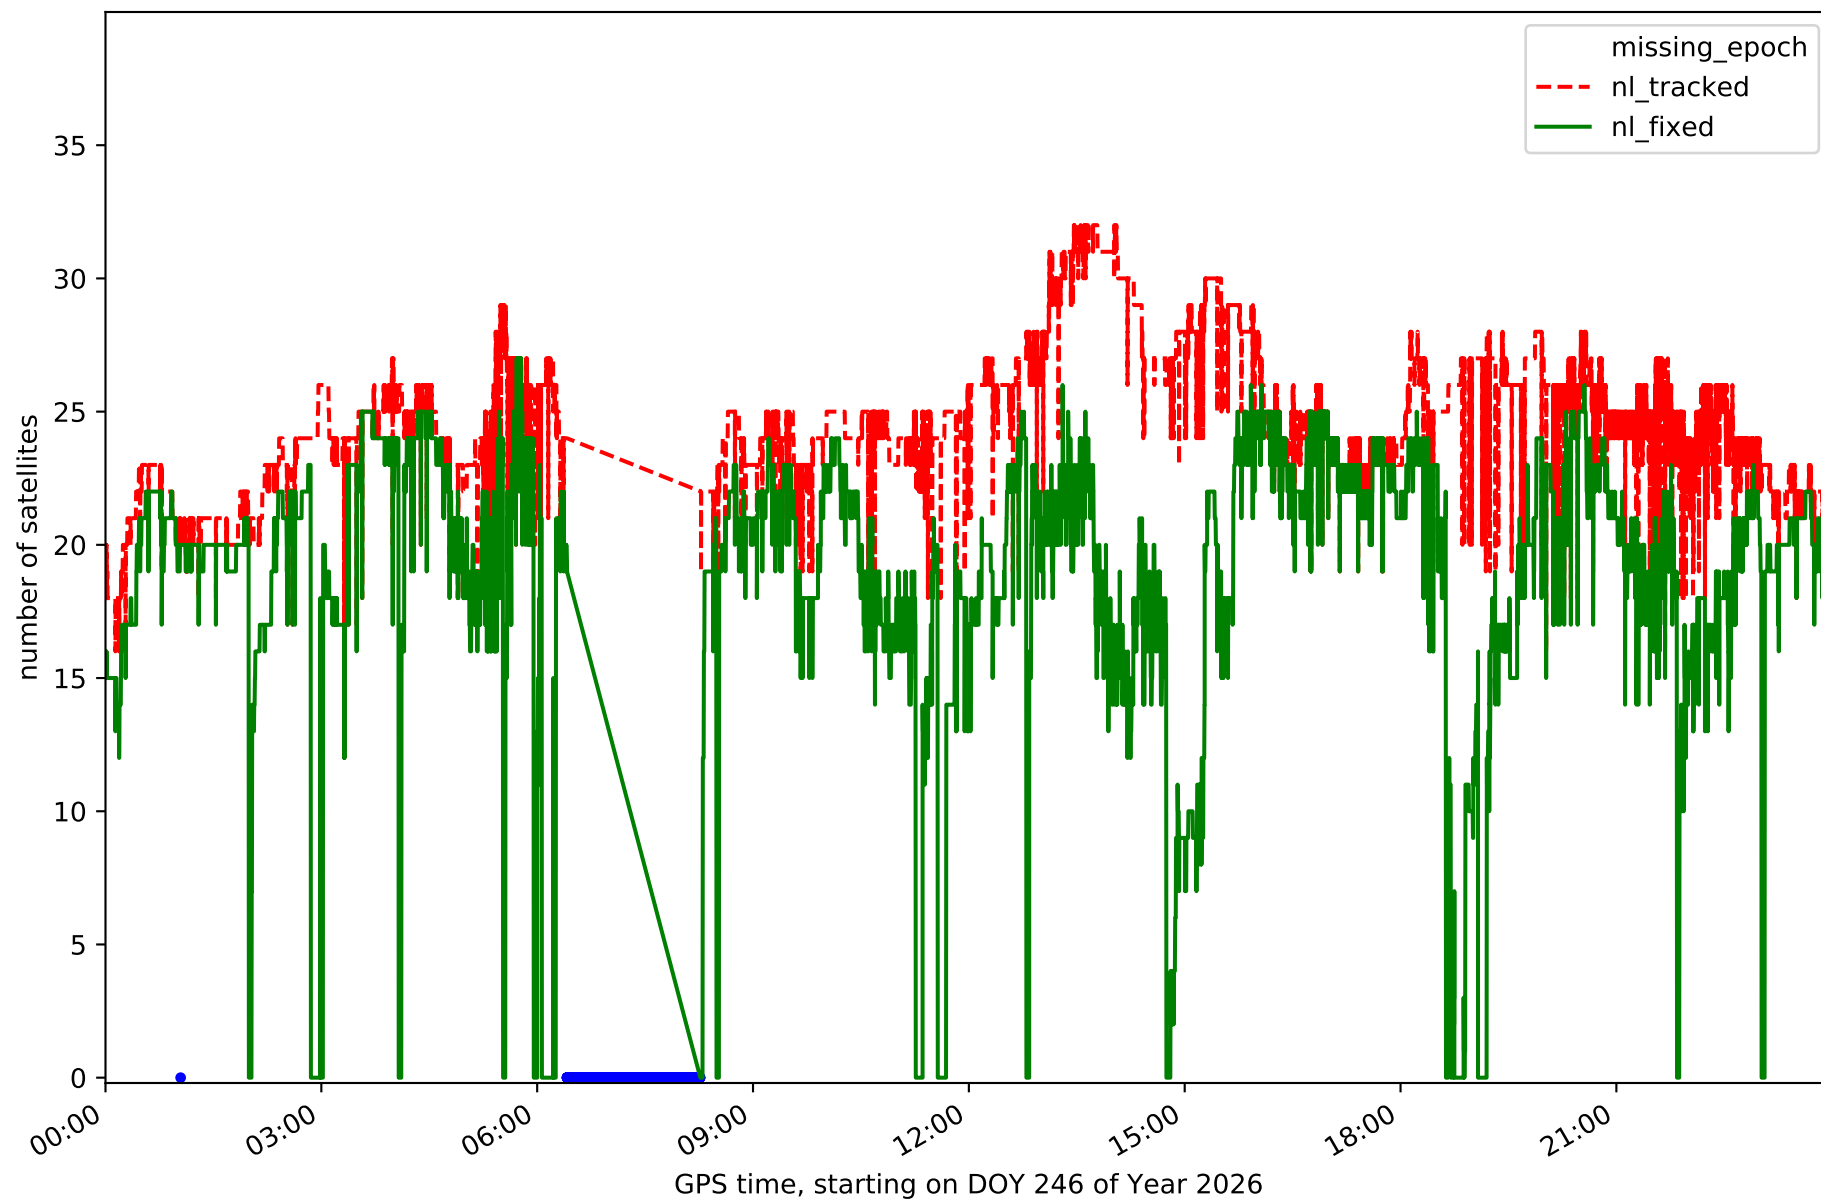


Station MASP in network N31T

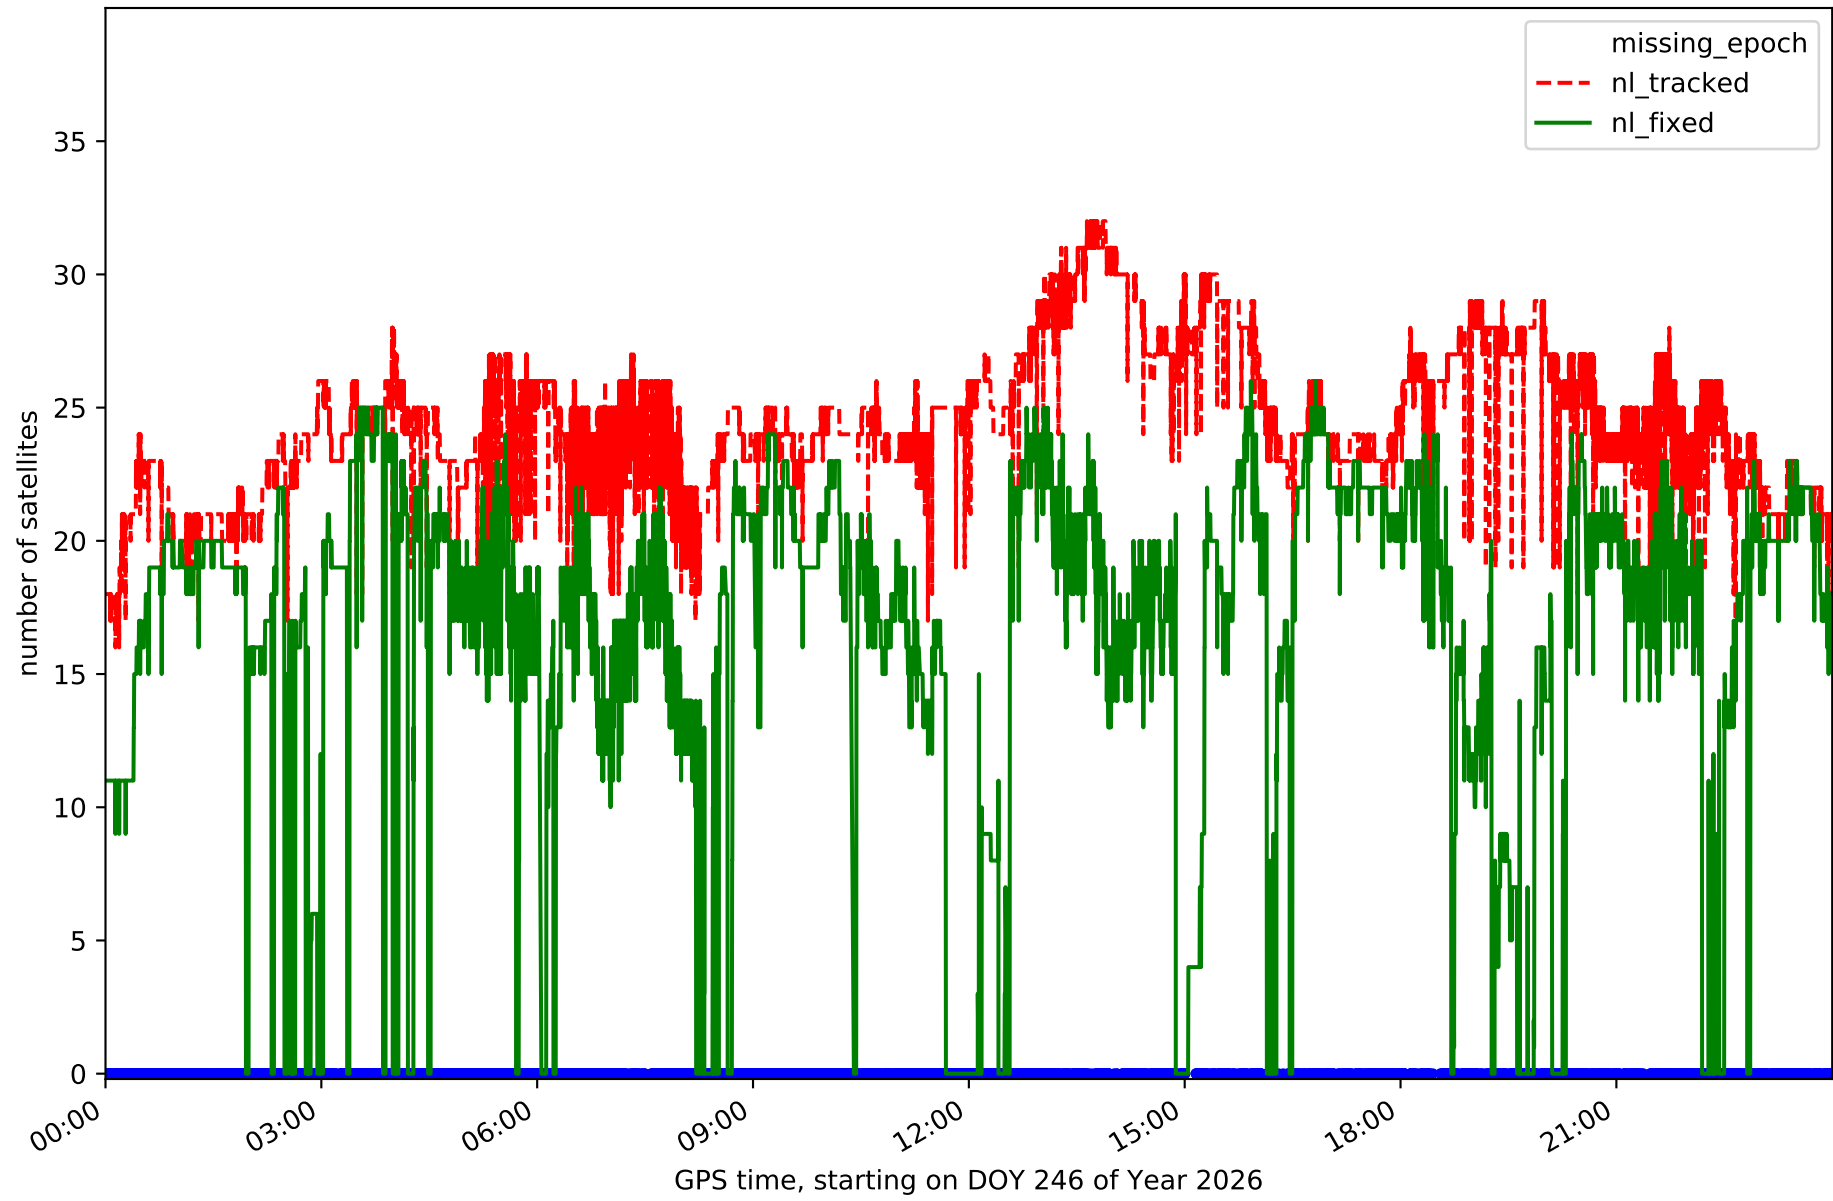


Station ULP2 in network N31T

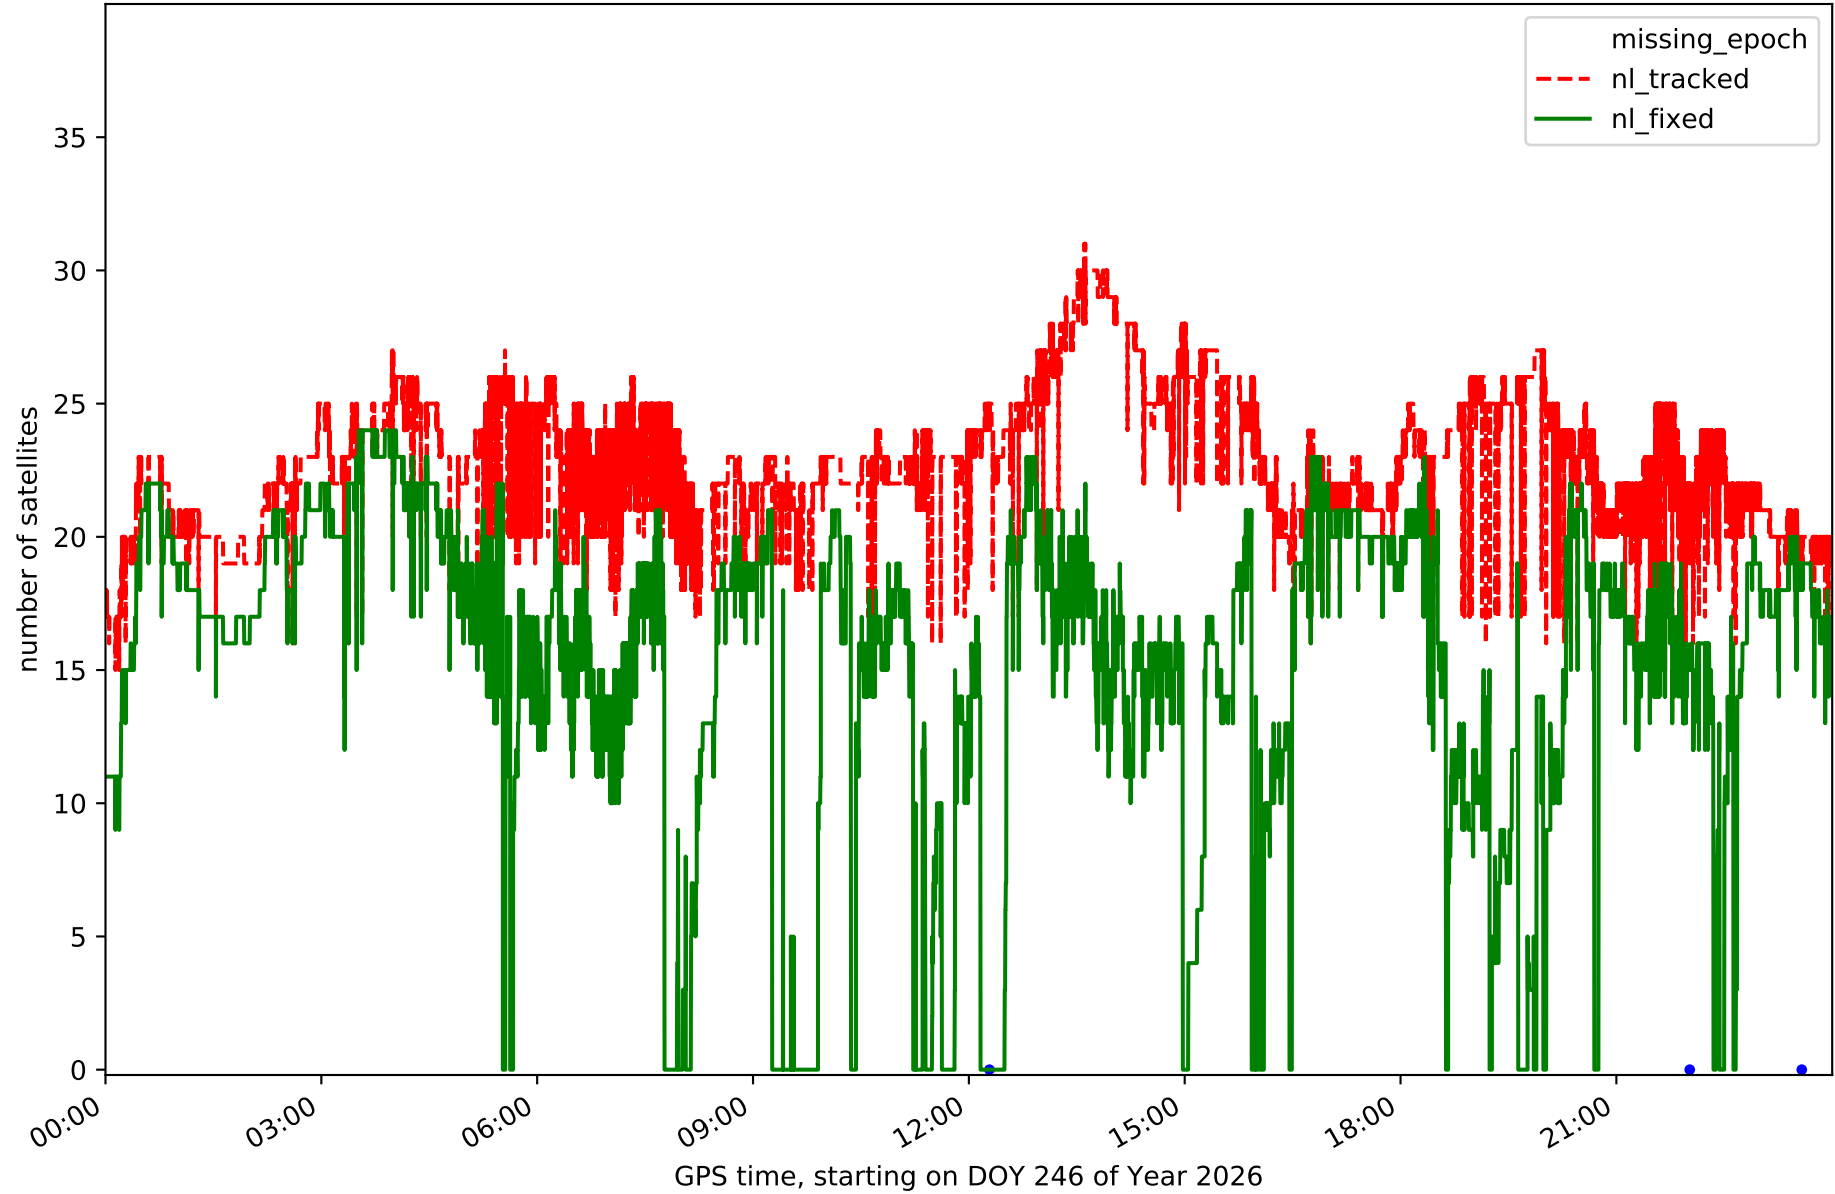


RefCheck for station FUER in network N31T

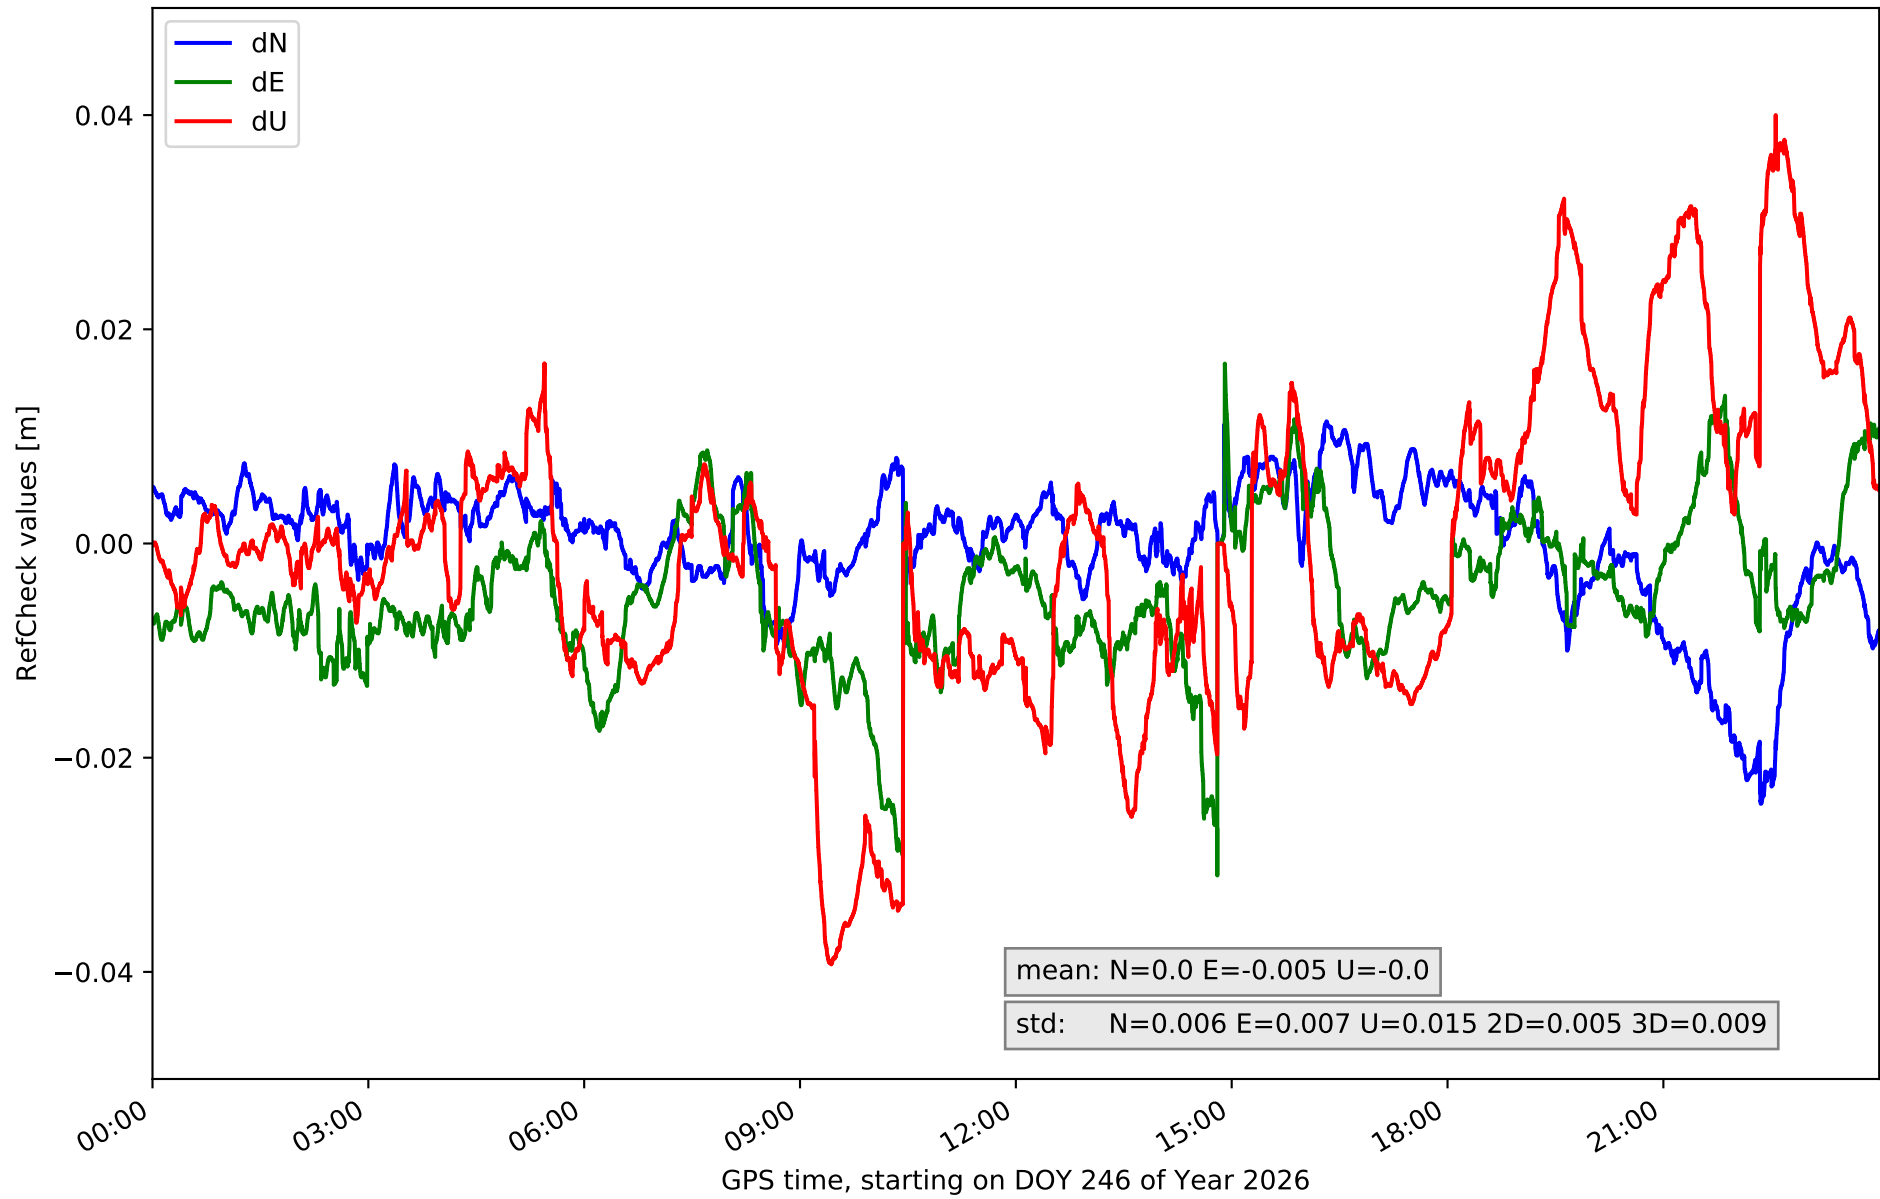


RefCheck for station LALA in network N31T

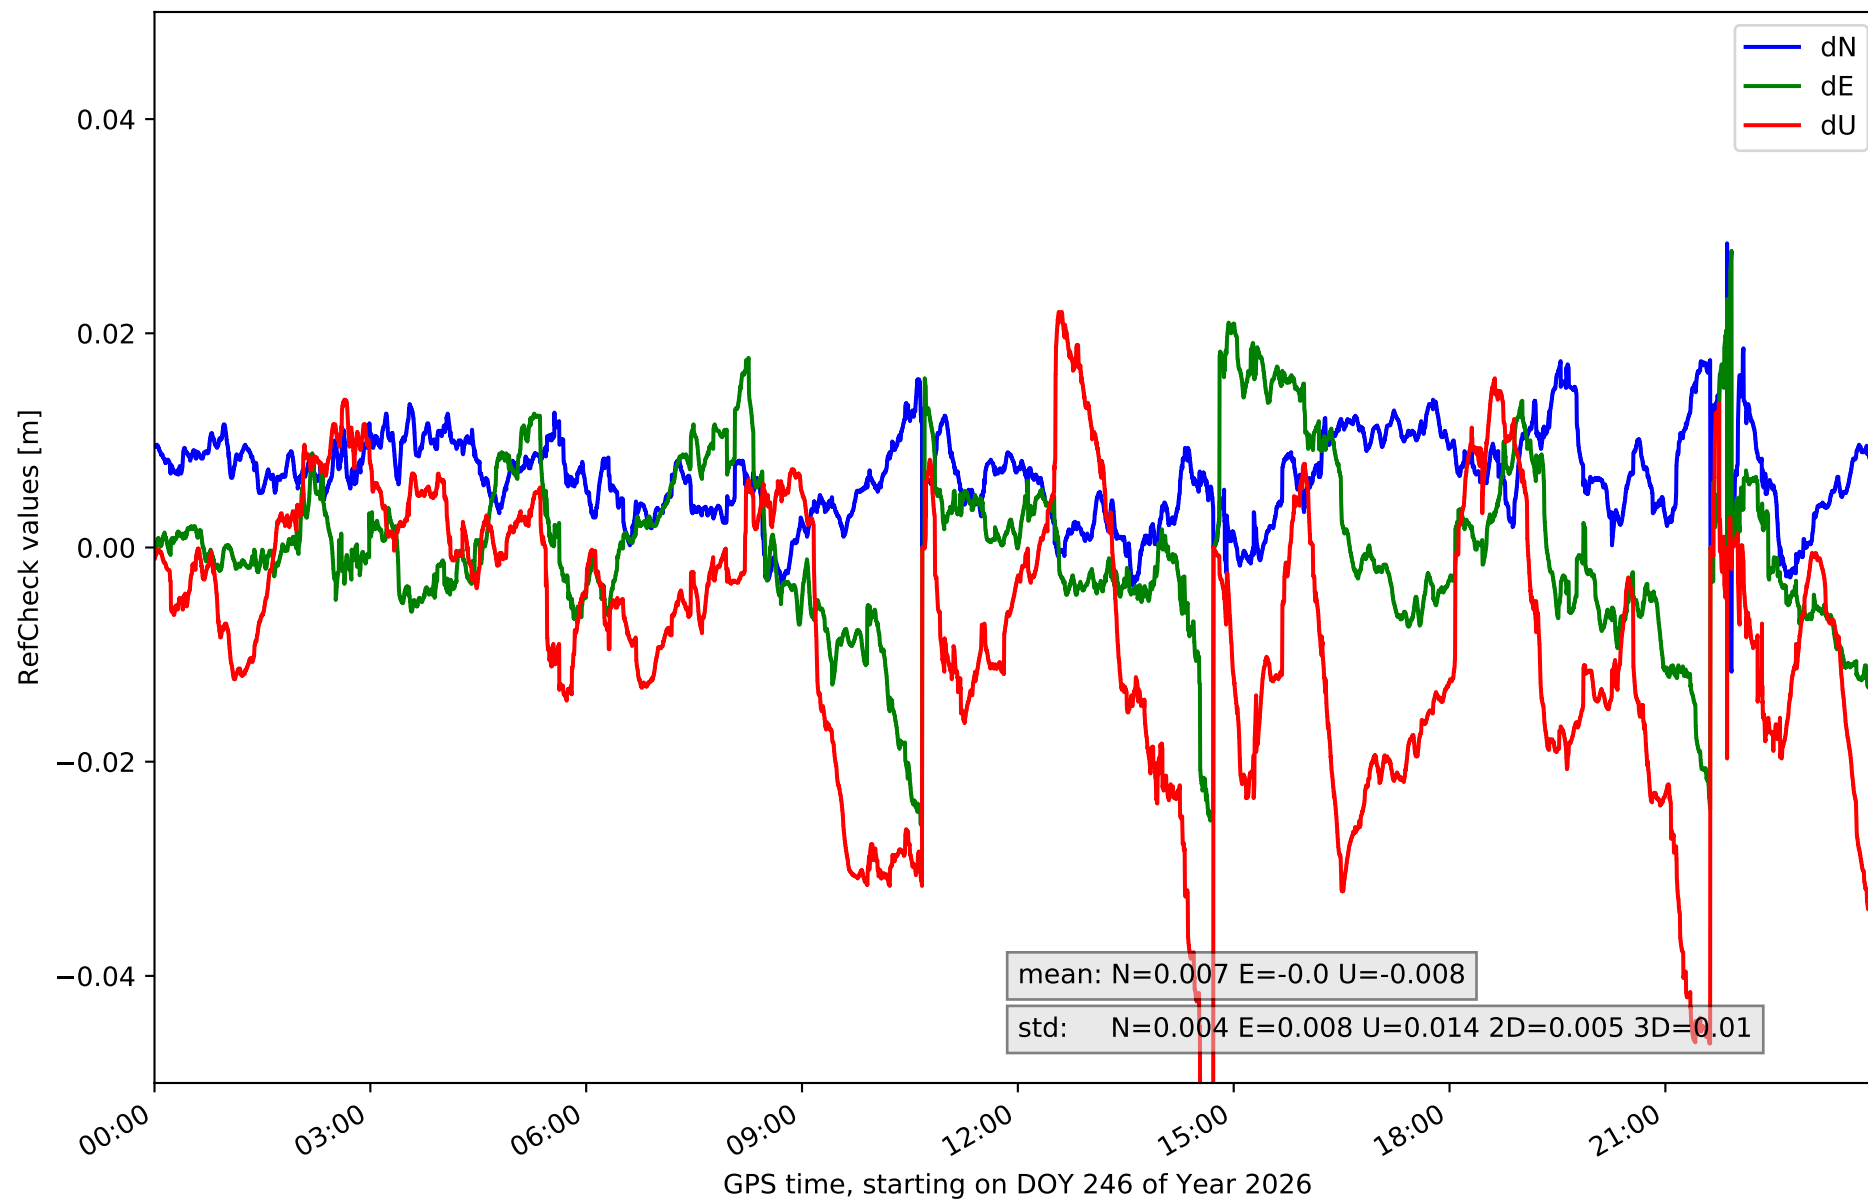


RefCheck for station LZ01 in network N31T

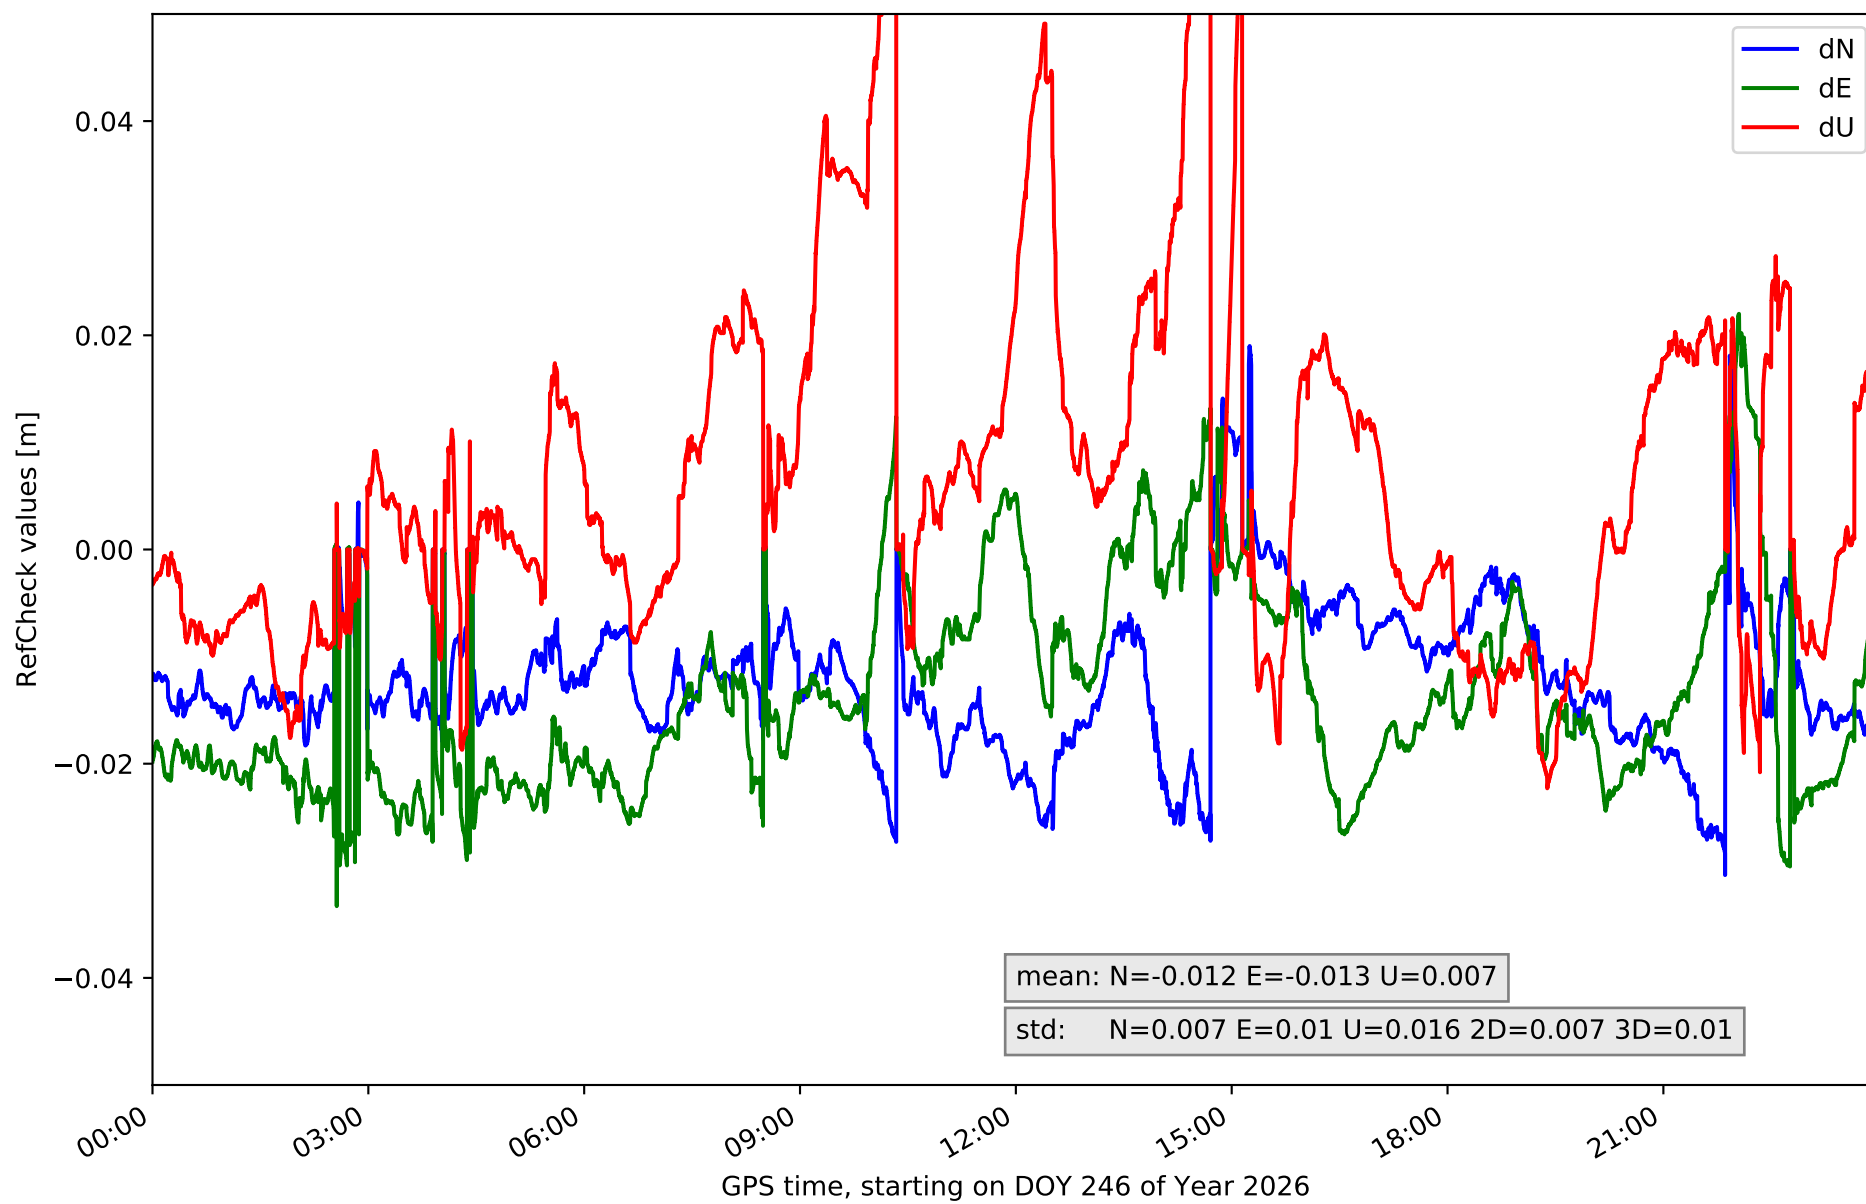


RefCheck for station LZ02 in network N31T

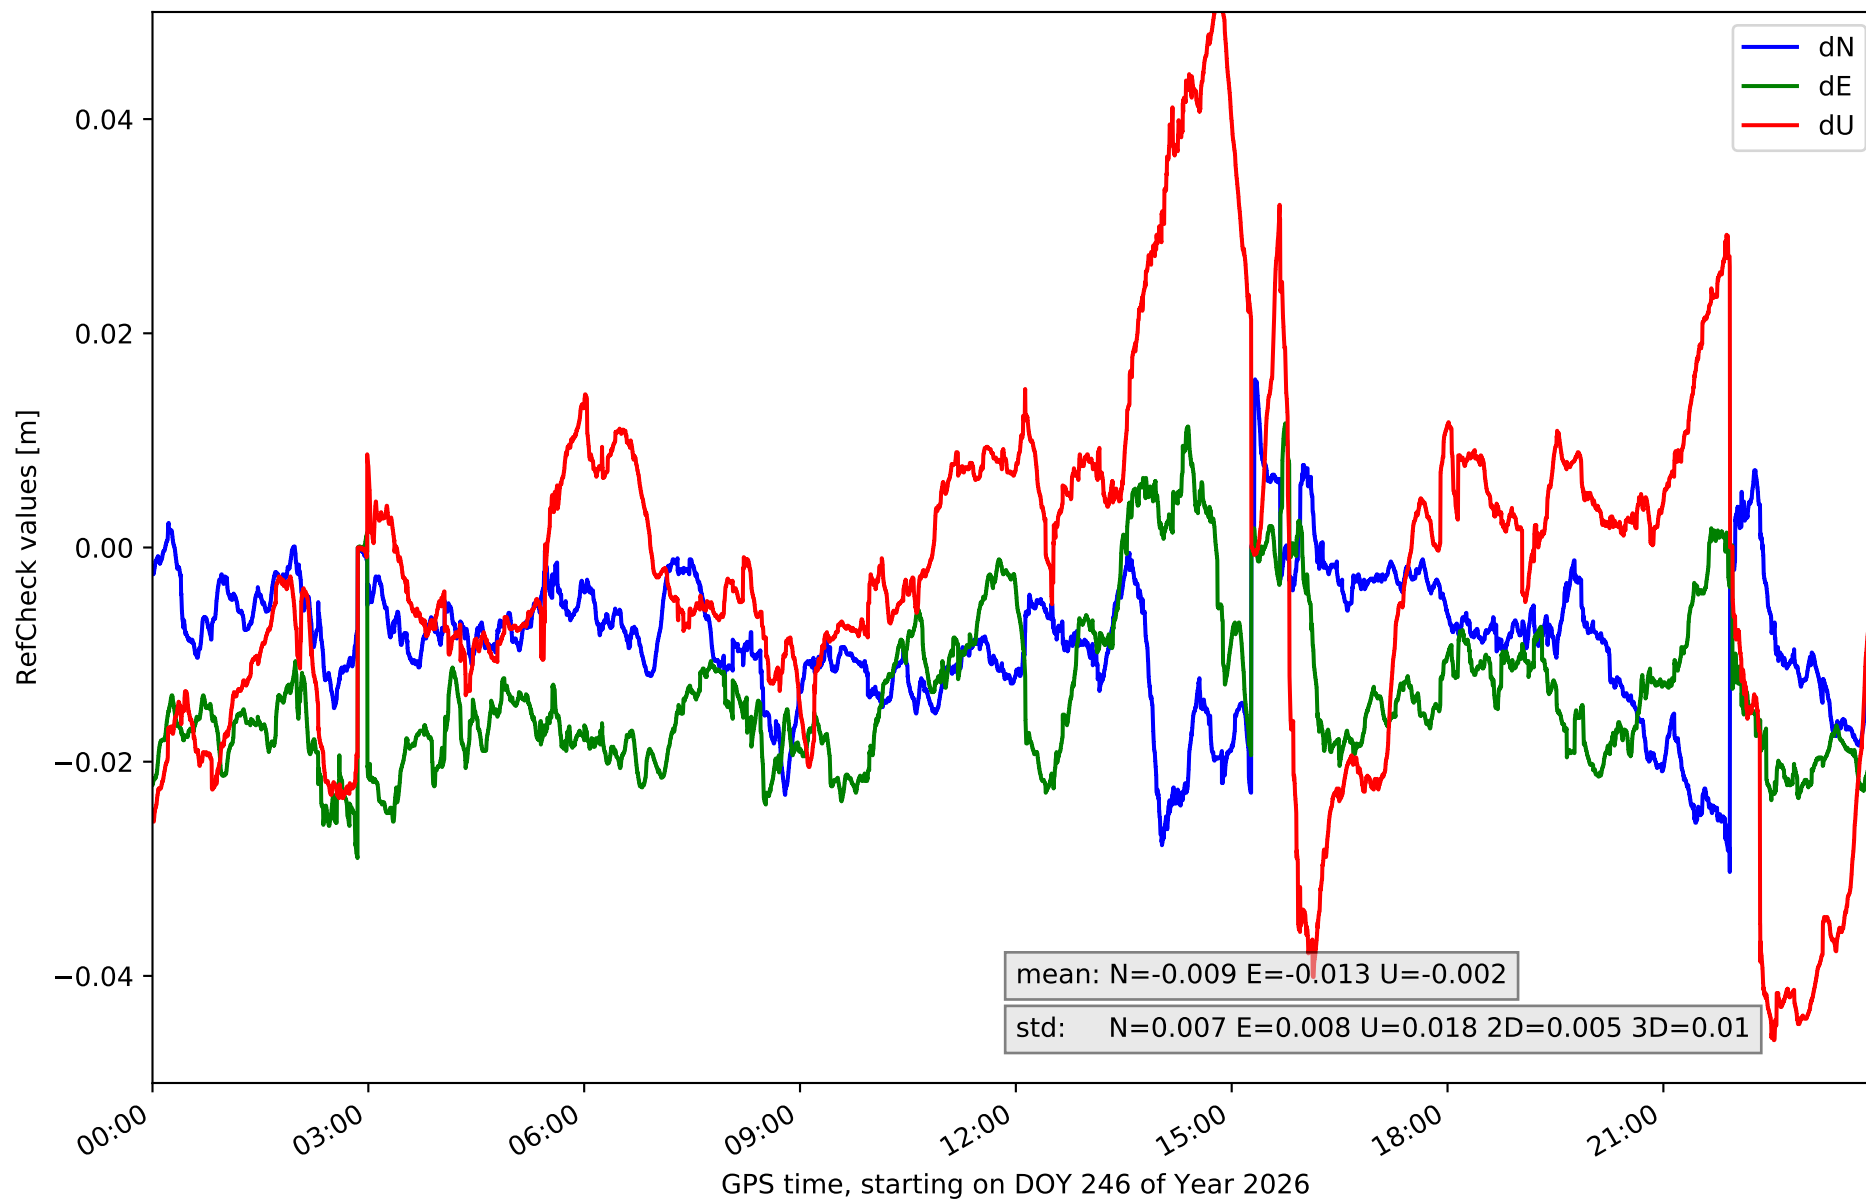


RefCheck for station LZ03 in network N31T

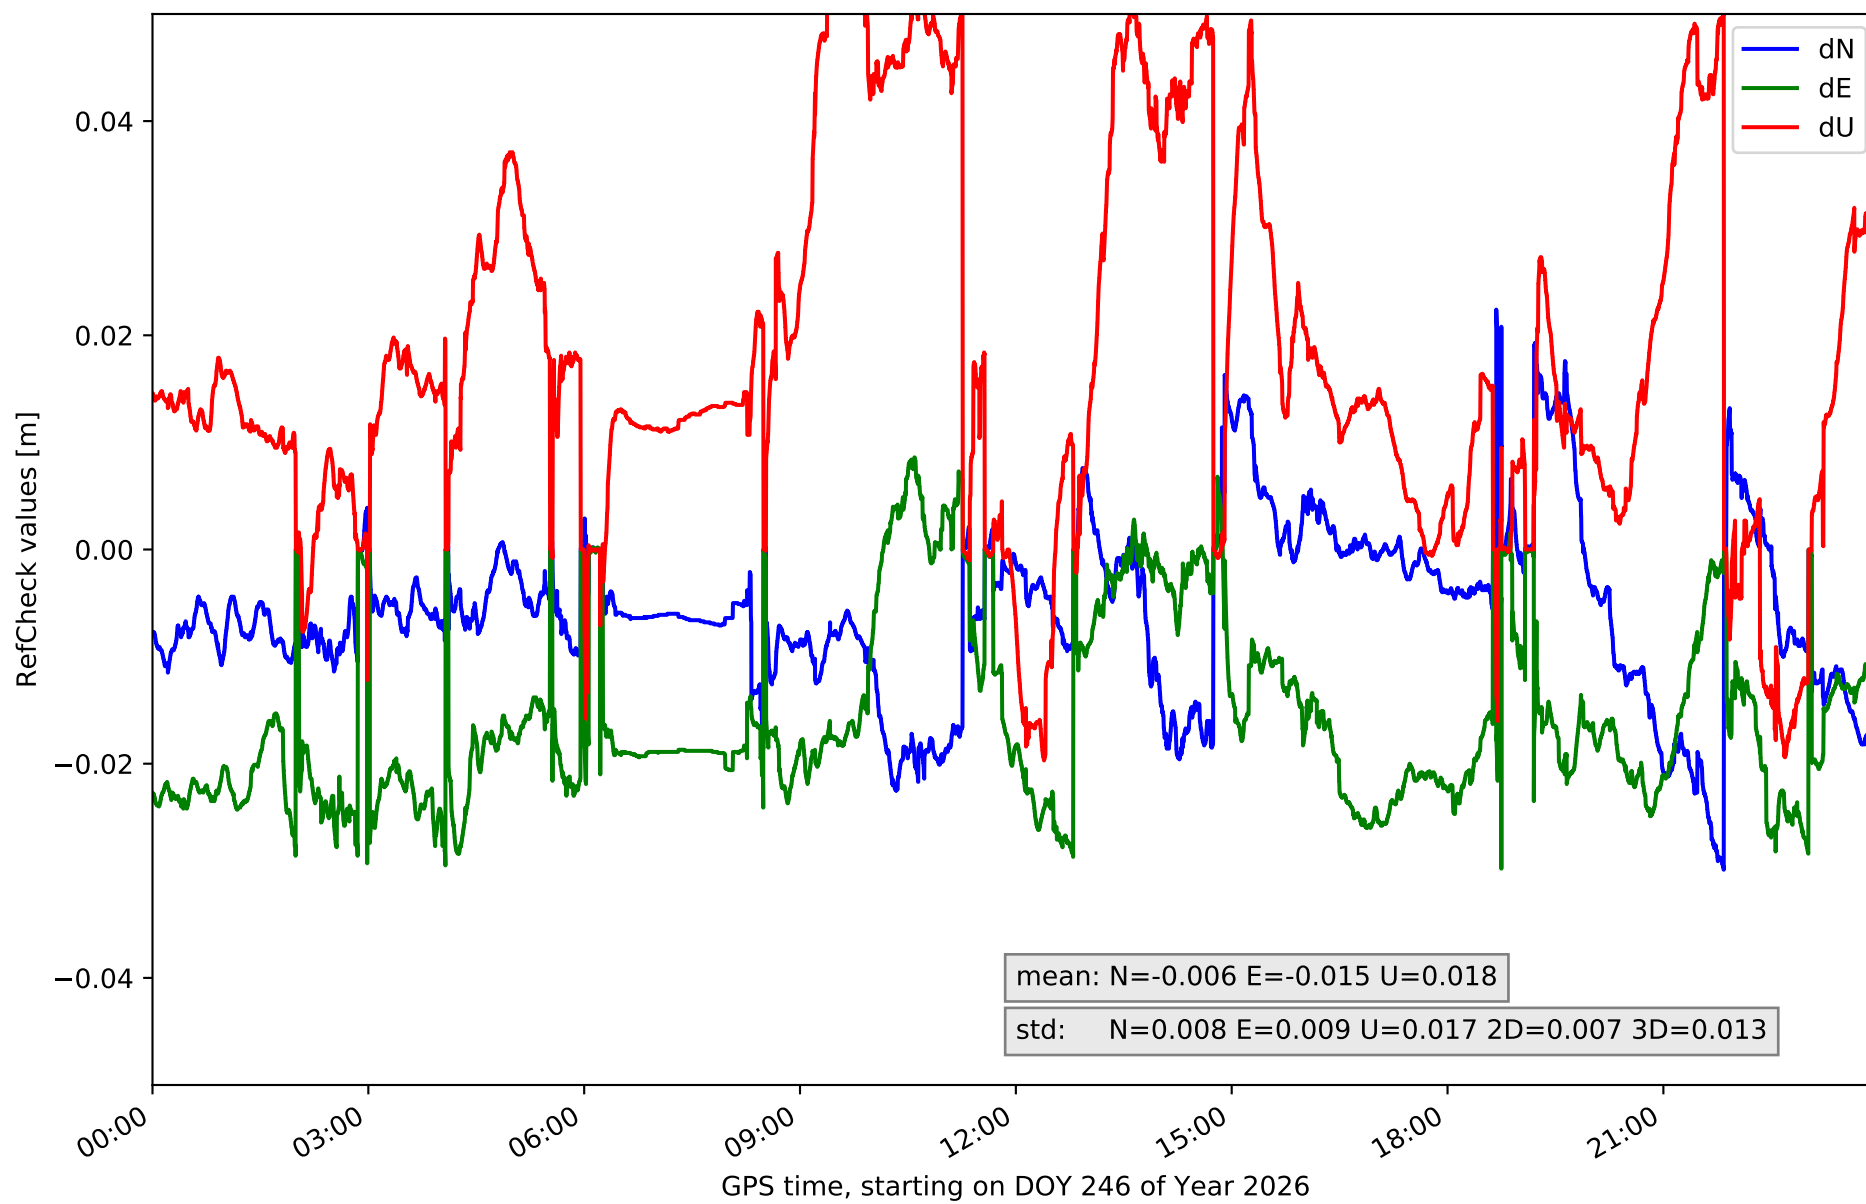

RefCheck for station MASP in network N31T

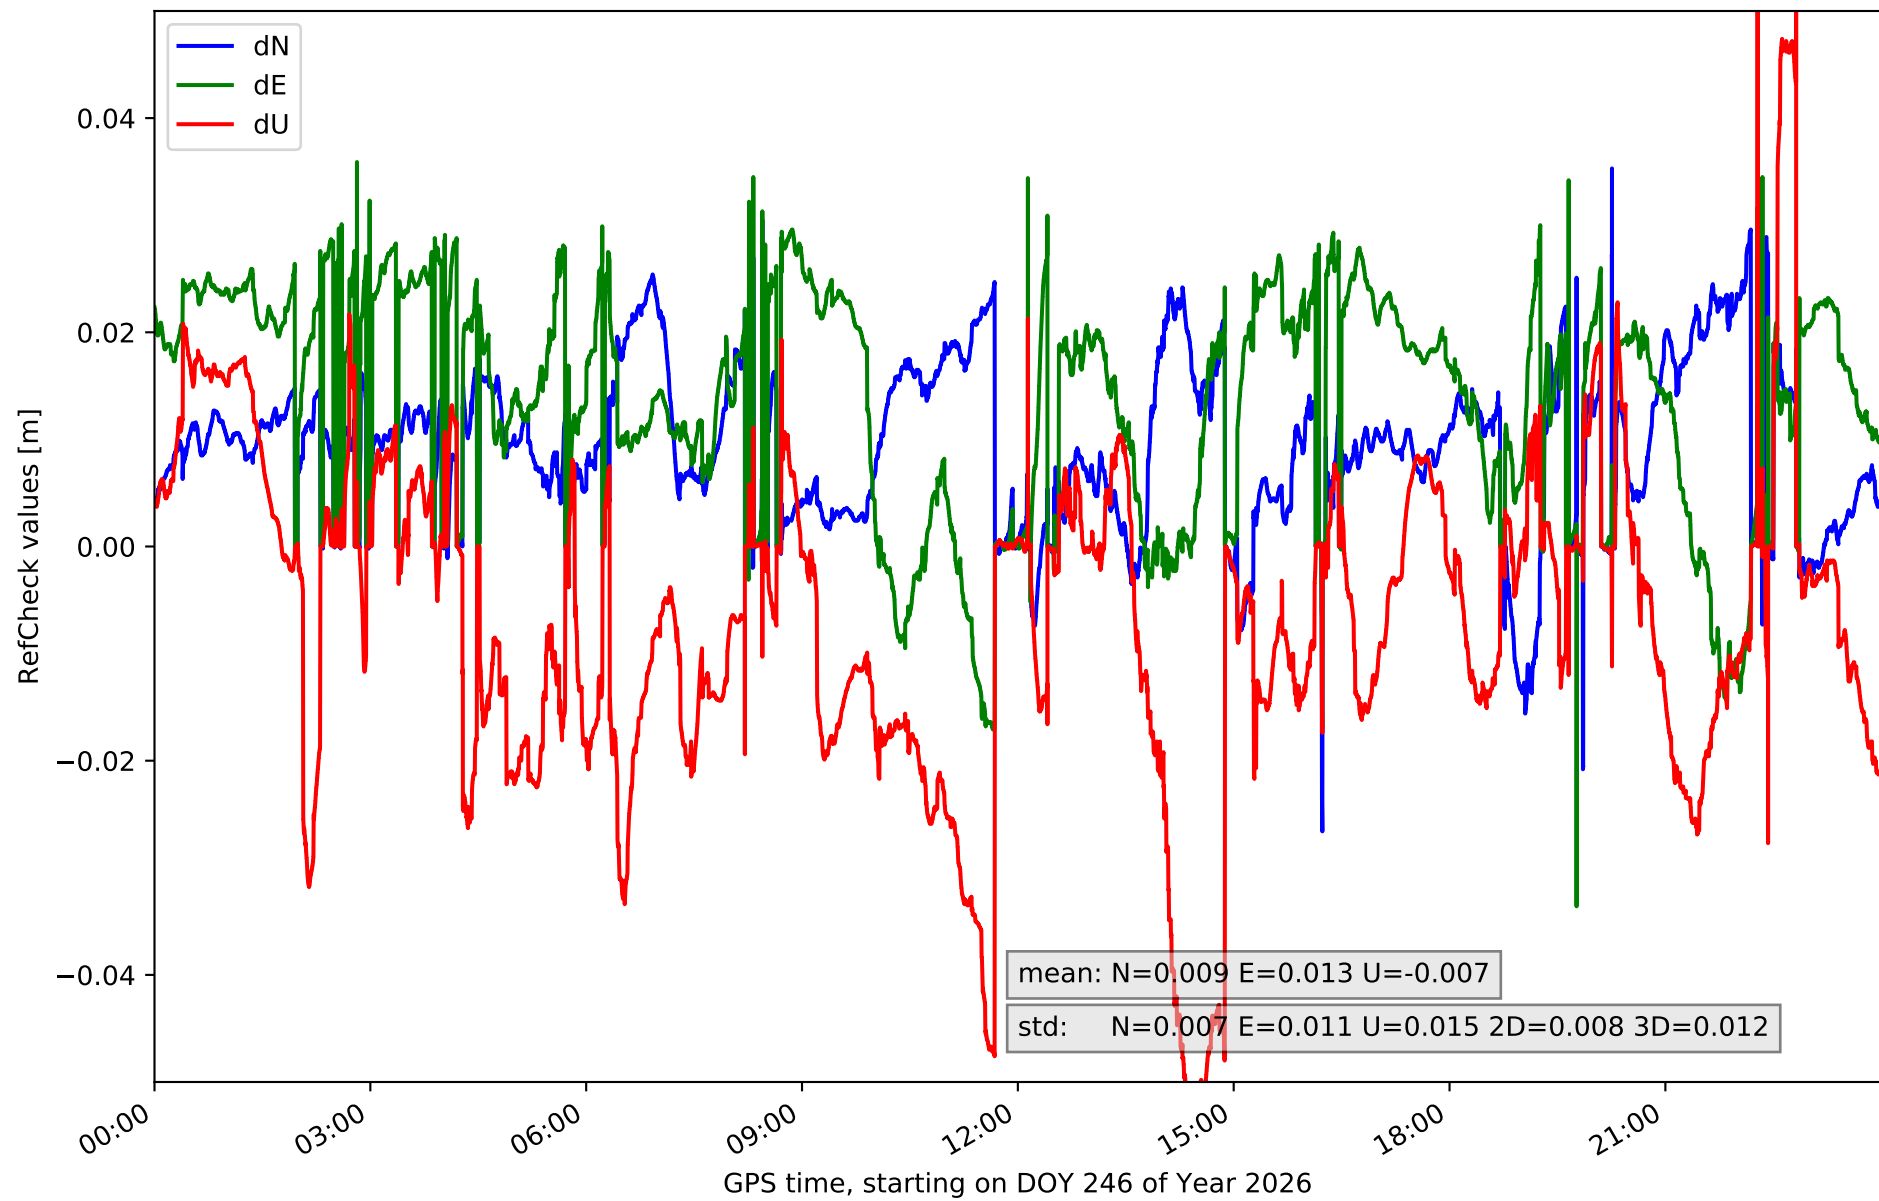

RefCheck for station ULP2 in network N31T

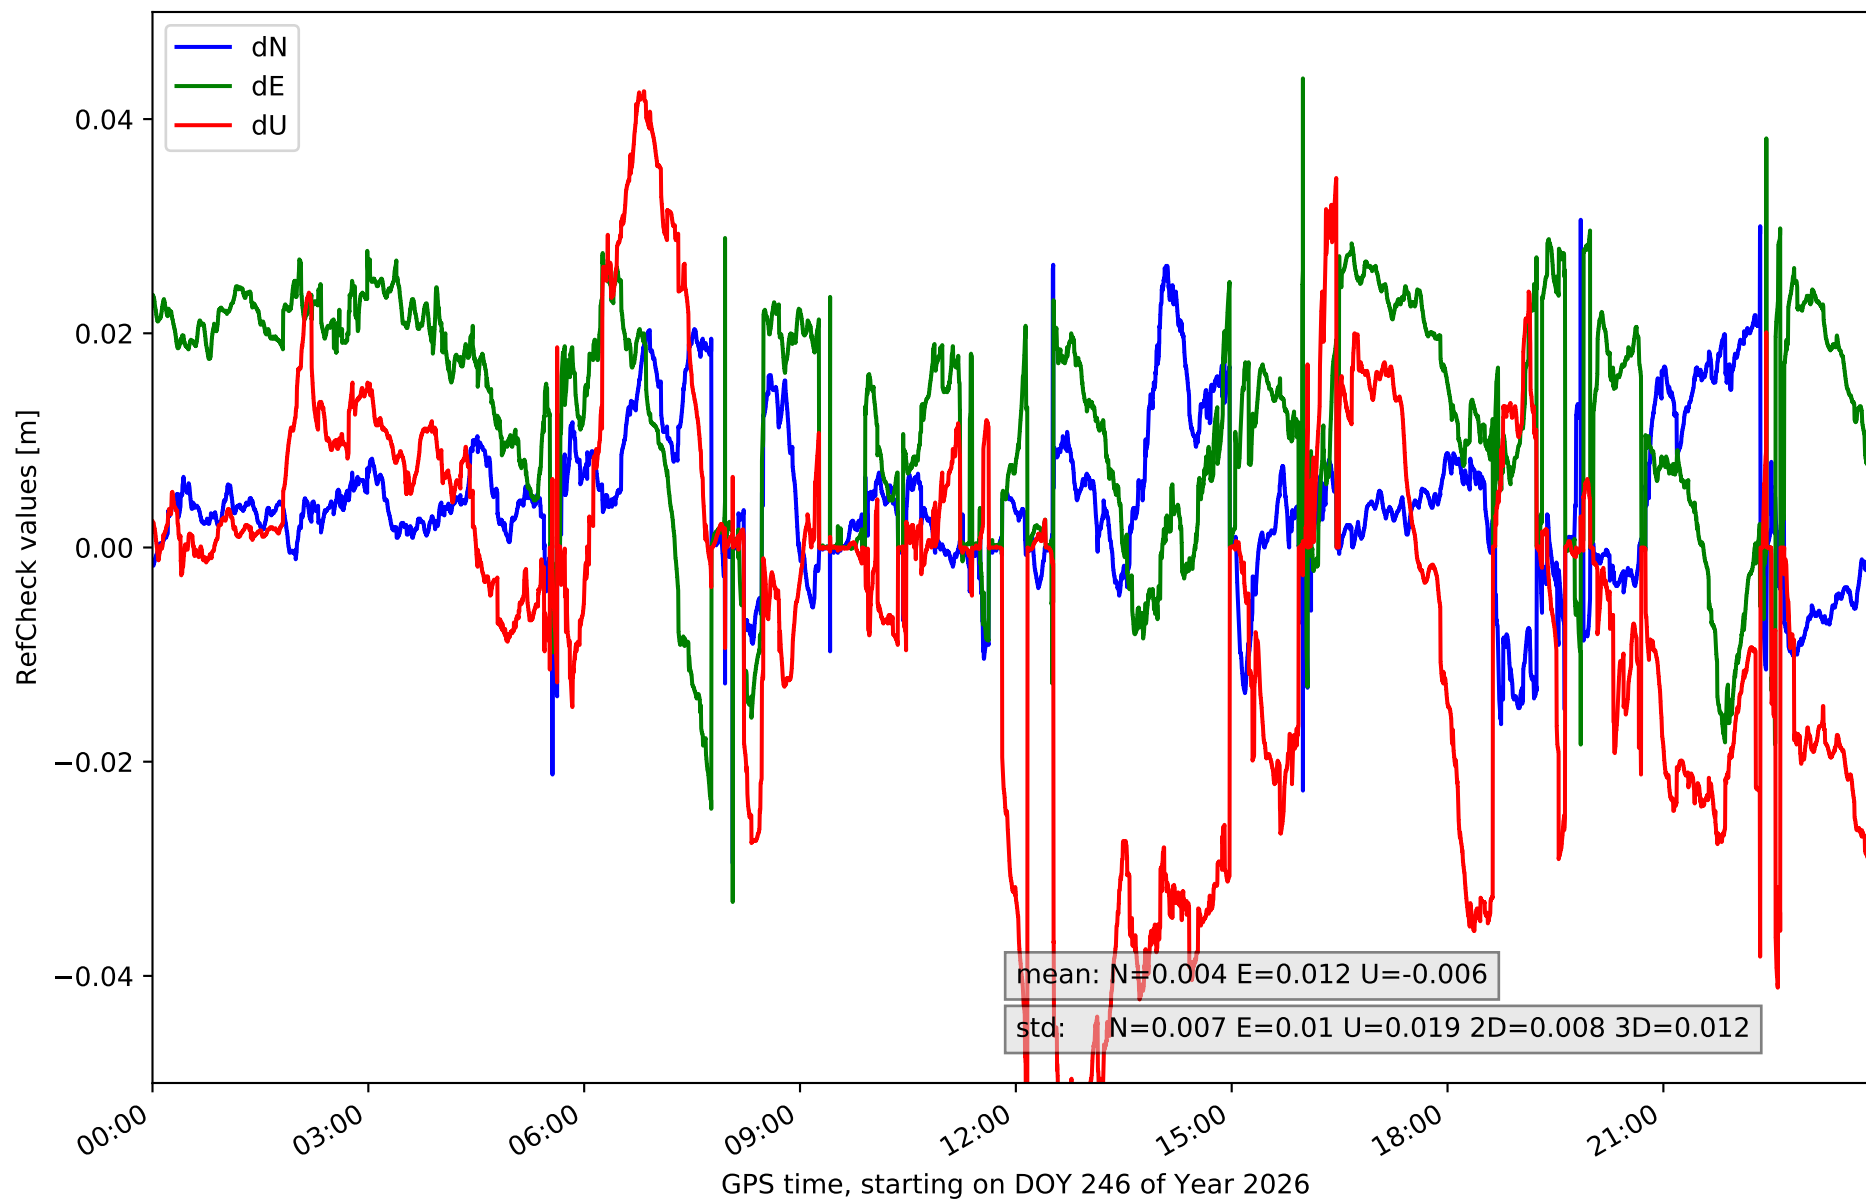

RefCheck values for network N31T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
FUER	-0.024	0.011	0.006	-0.031	0.017	0.007	-0.039	0.04	0.015	0.005	0.009	24226	31.8	15872	20.8
LALA	-0.012	0.028	0.004	-0.027	0.028	0.008	-0.06	0.022	0.014	0.005	0.01	33398	43.8	21077	27.6
LZ01	-0.03	0.019	0.007	-0.033	0.022	0.01	-0.022	0.06	0.016	0.007	0.01	67784	88.9	58767	77.1
LZ02	-0.03	0.016	0.007	-0.029	0.012	0.008	-0.046	0.053	0.018	0.005	0.01	71371	93.6	47284	62.0
LZ03	-0.03	0.022	0.008	-0.03	0.009	0.009	-0.02	0.056	0.017	0.007	0.013	68420	89.7	64859	85.1
MASP	-0.027	0.035	0.007	-0.034	0.036	0.011	-0.058	0.062	0.015	0.008	0.012	64836	85.0	57056	74.8
ULP2	-0.029	0.031	0.007	-0.033	0.044	0.01	-0.061	0.043	0.019	0.008	0.012	60158	78.9	52225	68.5
Mean	-0.026	0.023	0.007	-0.031	0.024	0.009	-0.044	0.048	0.016	0.006	0.011	55741.9	73.1	45305.7	59.4
Min/Max	-0.03	0.035	0.008	-0.034	0.044	0.011	-0.061	0.062	0.019	0.008	0.013	71371	93.6	64859	85.1

fixing statistic for network N31T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	82.9	86.3	78.2	87.4	69.4
considering satellites with dual-frequency fixed	75.4	79.1	69.3	79.7	65.1
considering all signals separately	76.6	79.5	69.3	80.3	65.2