

summary for network N01T

timeperiod chosen: from 2025-05-25-00:00:00 until 2025-05-25-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.0 seconds


average fixing percentage with threshold set to 0.3: 92.8 percent

stations available: 8 of 17


station information:

station ARAJ:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 580.921
station BUIT:	antenna: TRM57971.00	TZGD	receiver: TRIMBLE NETR9	height: 1032.705
station IGNE:	antenna: LEIAT504GG	LEIS	receiver: LEICA GR50	height: 766.956
station MAD1:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 724.483
station ORUS:	antenna: TRM57971.00	TZGD	receiver: TRIMBLE NETR9	height: 862.752
station SMDV:	antenna: TPSCR.G3	TPSH	receiver: TPS NET-G5	height: 670.791
station TALV:	antenna: TPSCR.G5	TPSH	receiver: TPS NET-G5	height: 458.35
station YEB1:	antenna: LEIAR25	NONE	receiver: LEICA GR25	height: 975.396


Processing rate in network N01T

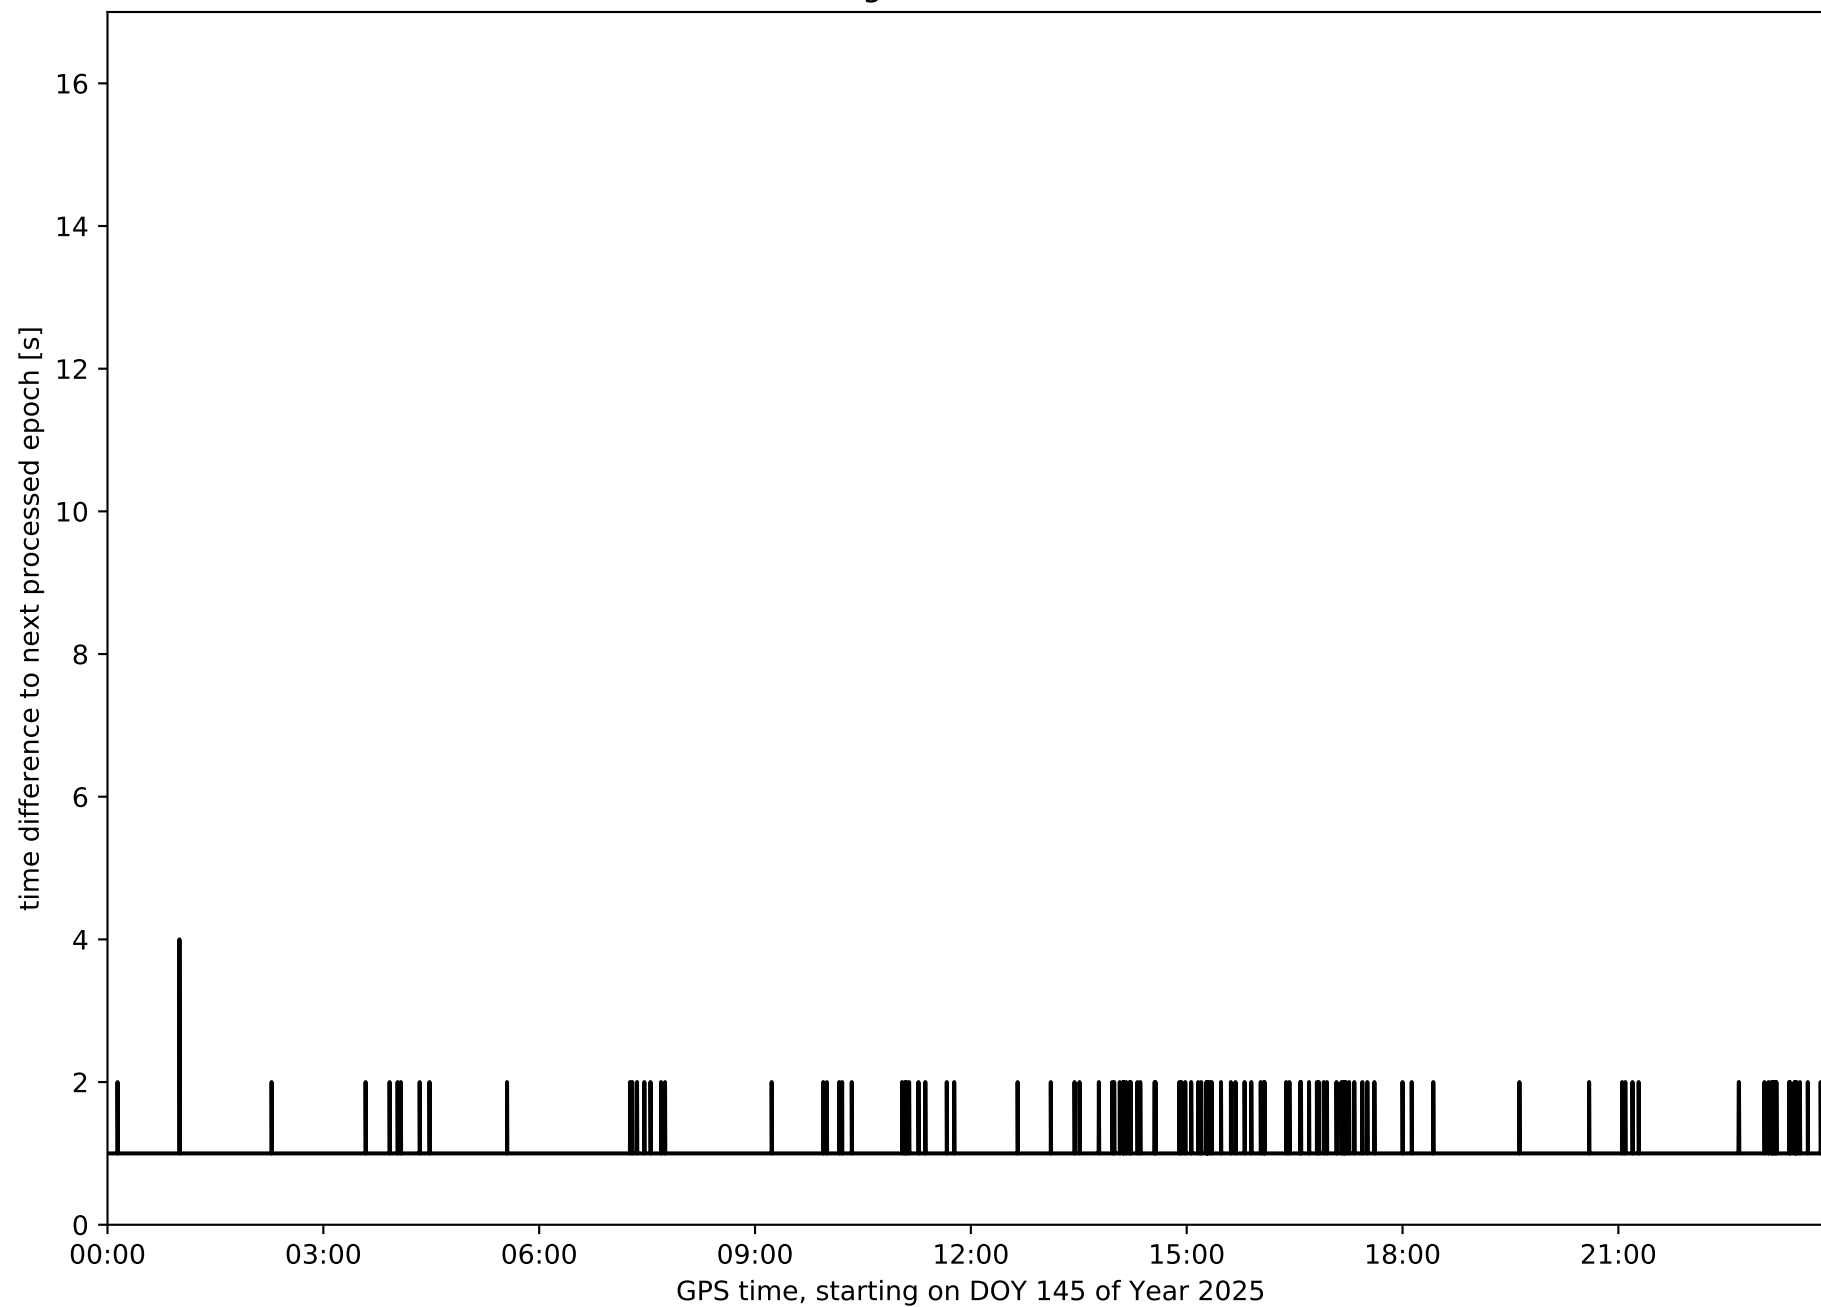


Histogram of the processing rate in network N01T (durations larger 15 seconds neglected)

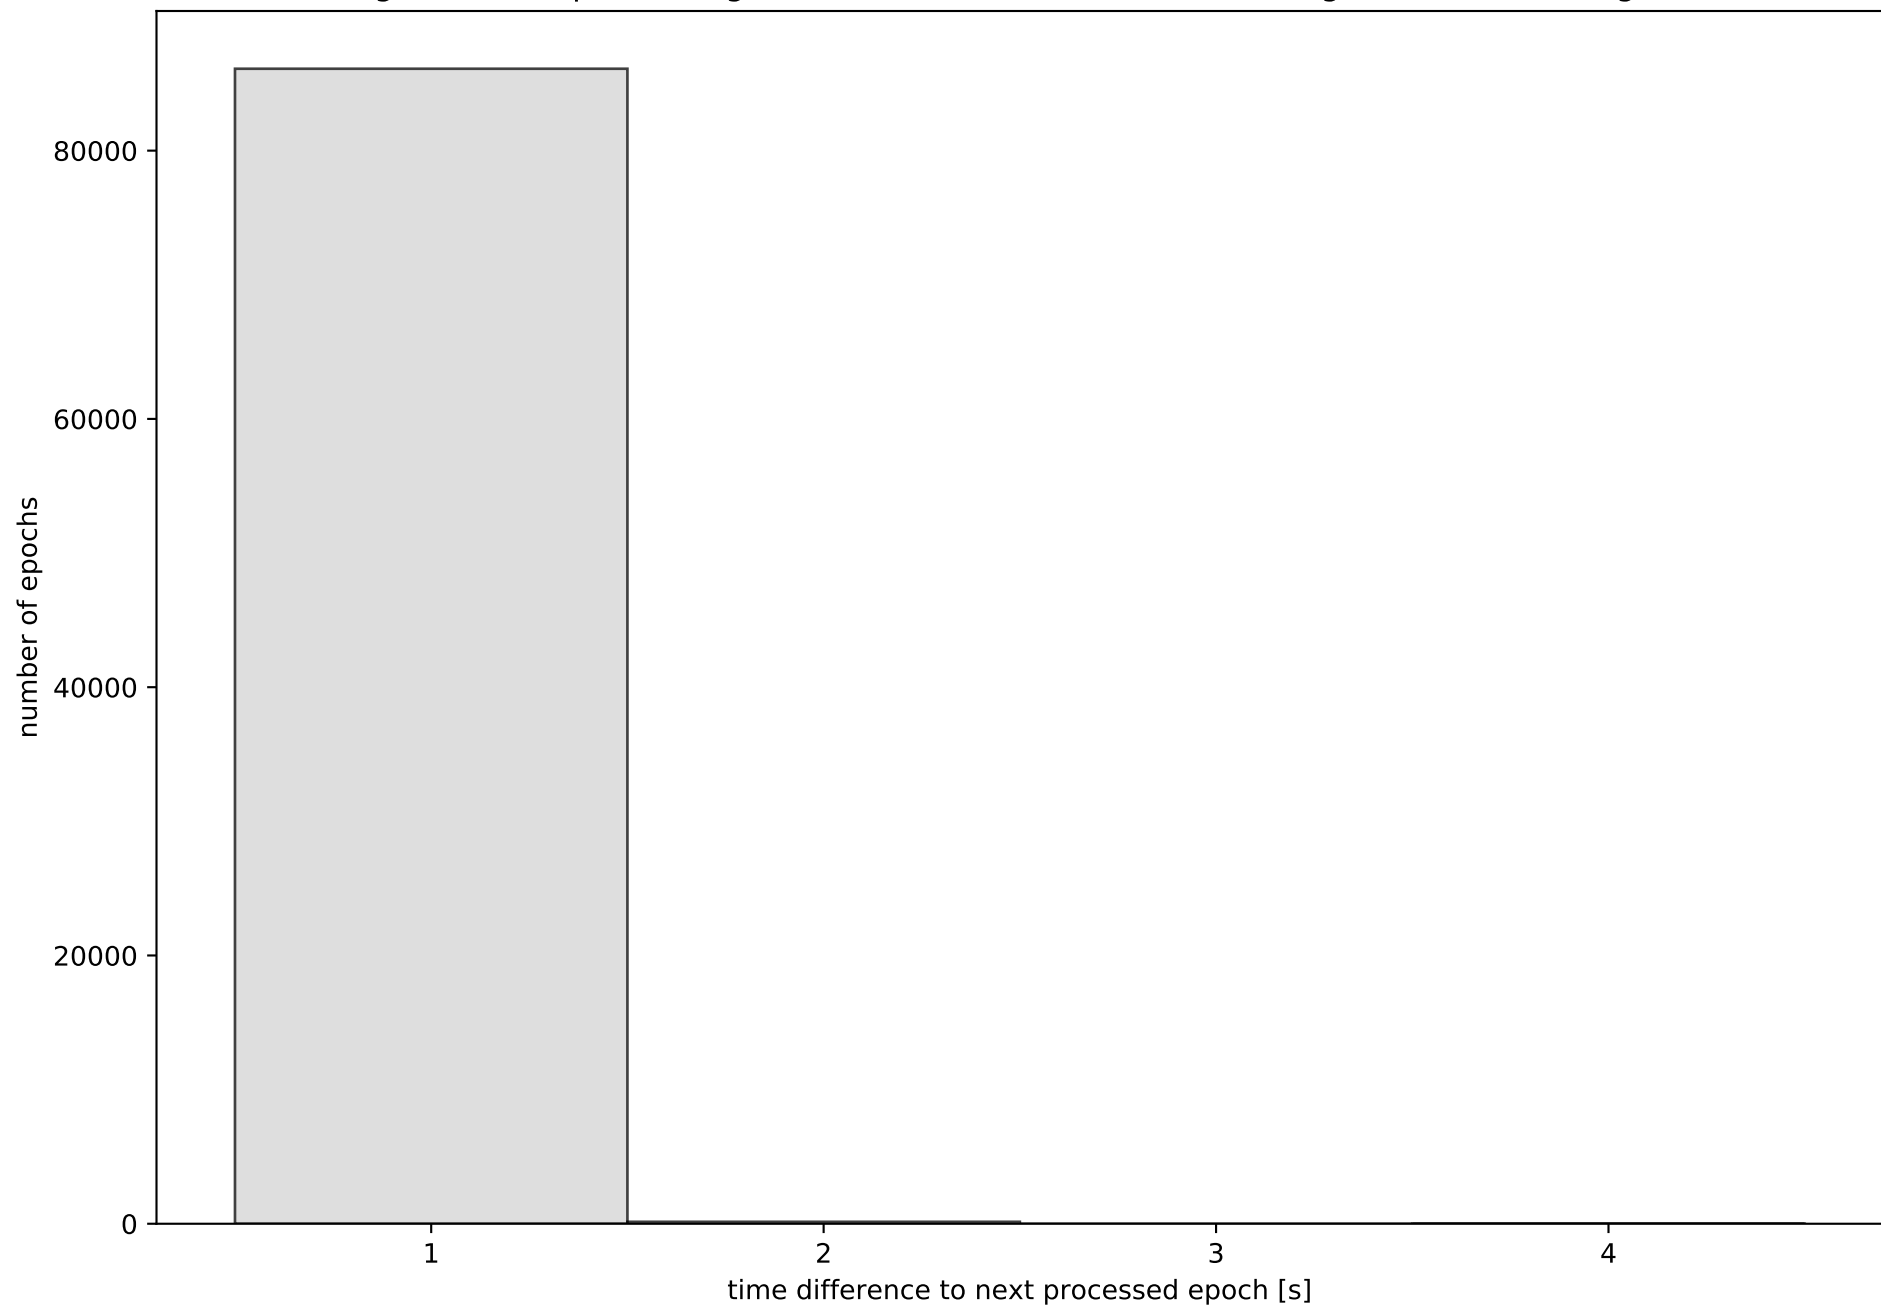


Network N01T with threshold set to 0.3

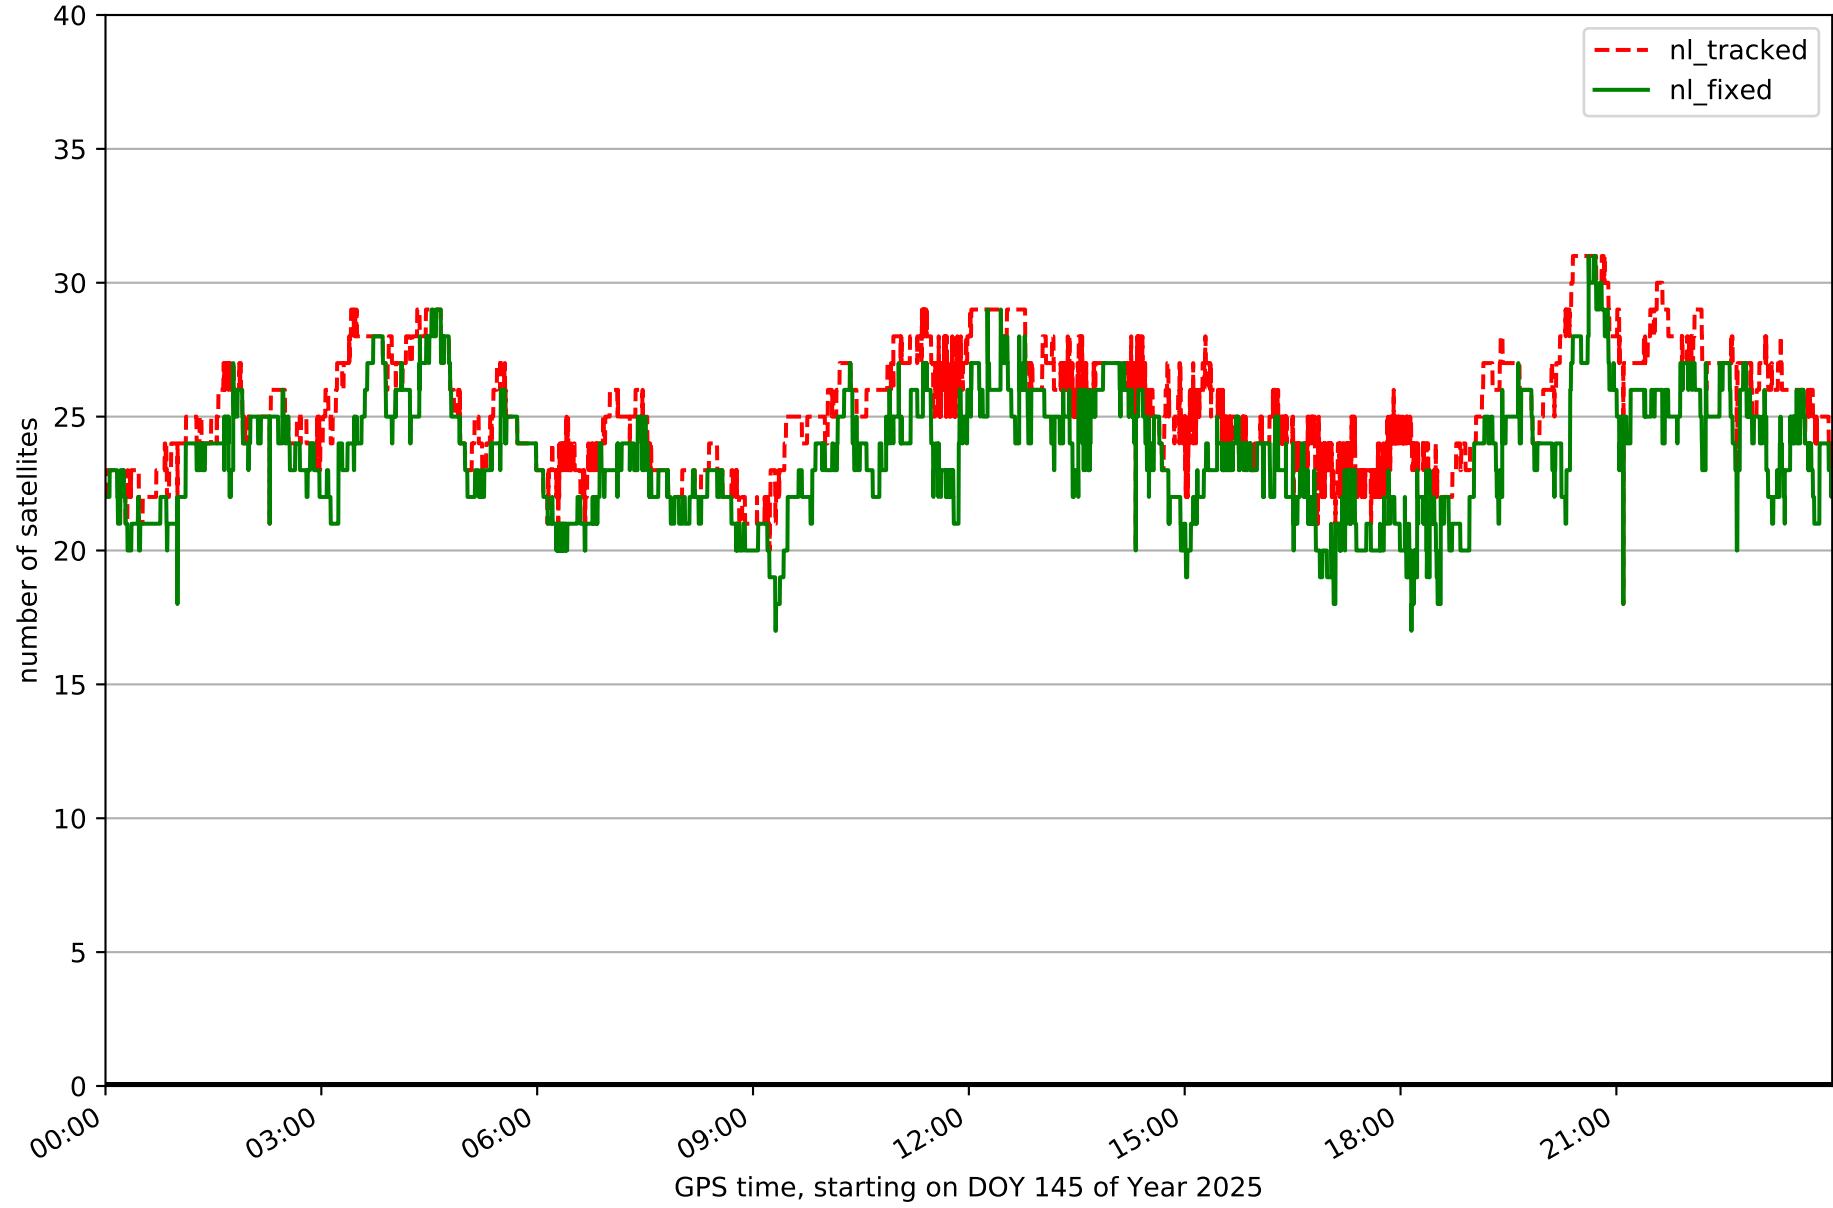


Fixing percentage of satellites in network N01T with threshold set to 0.3

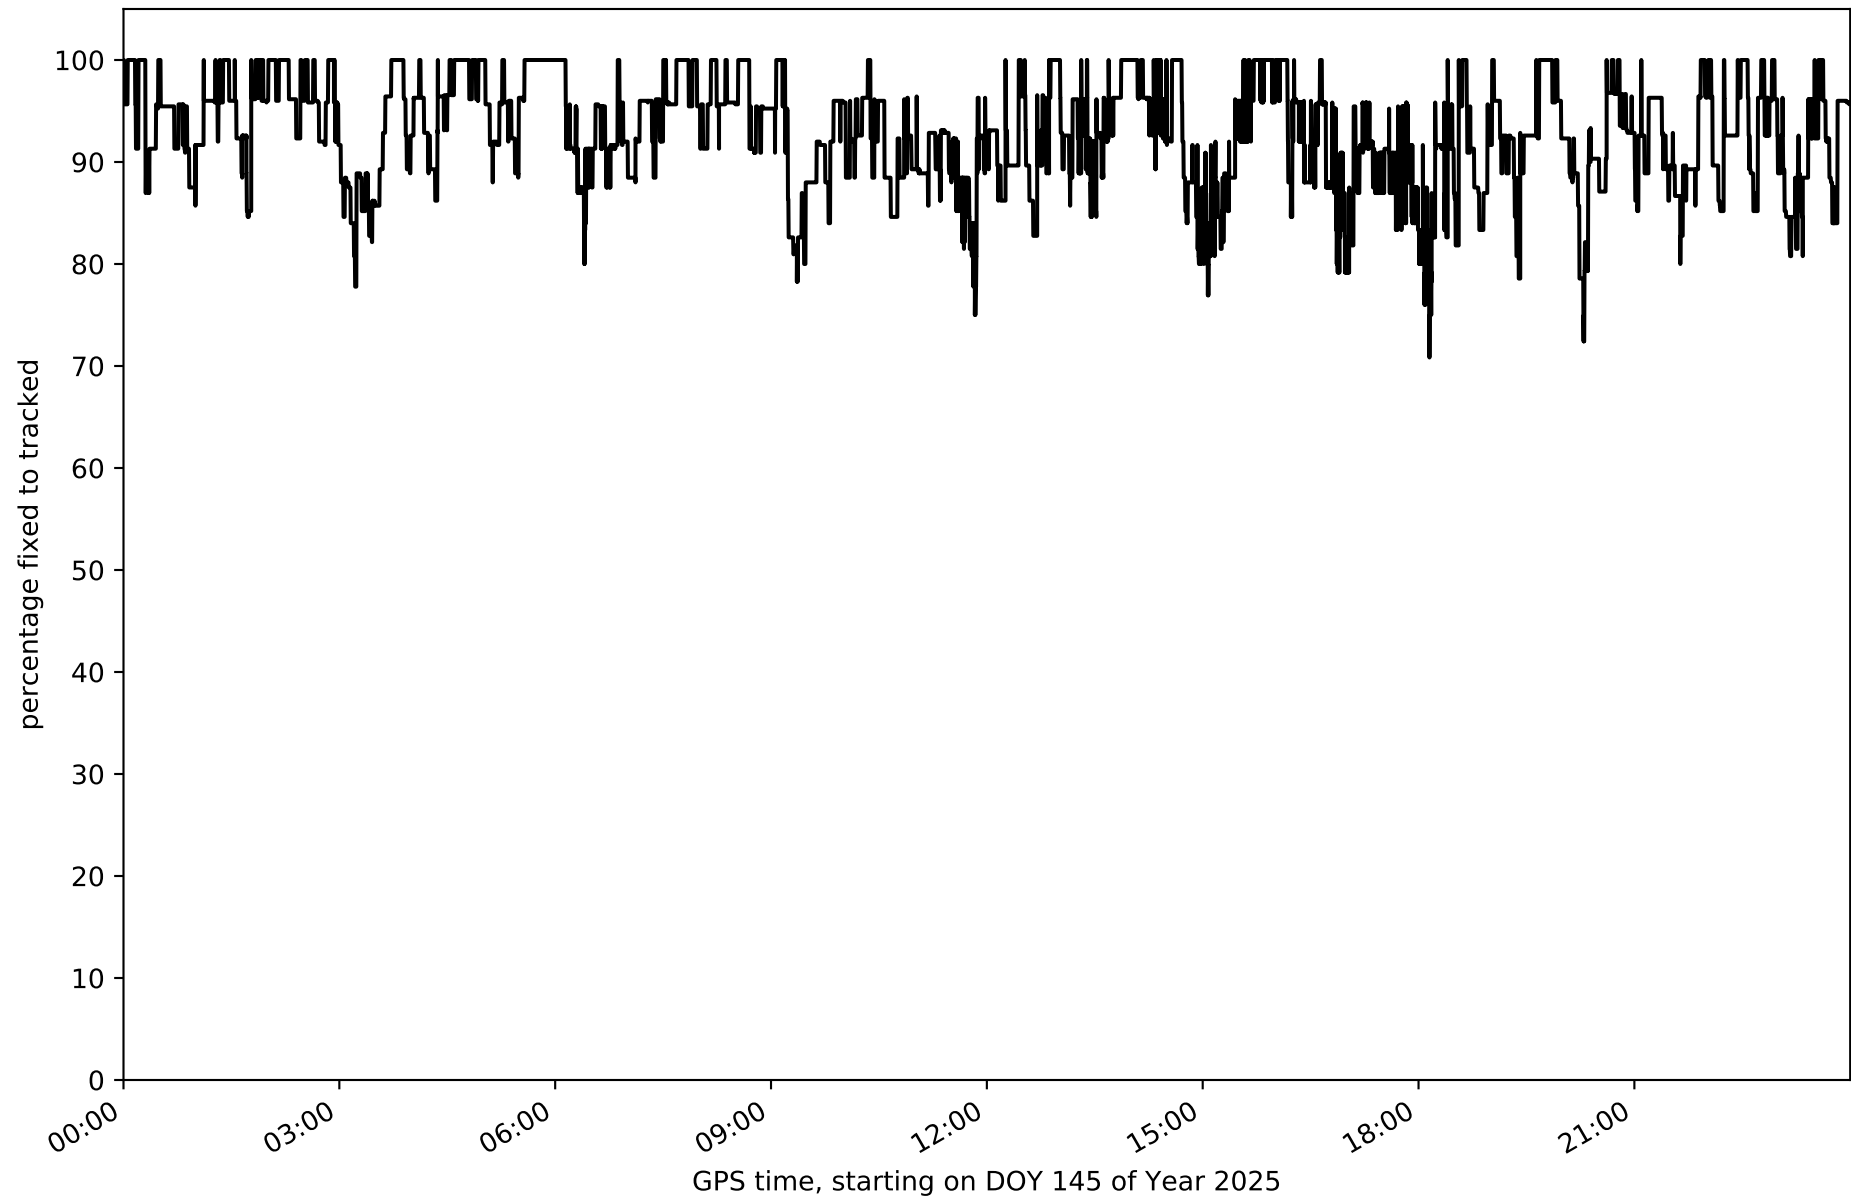


Network N01T - only GPS with threshold set to 0.3

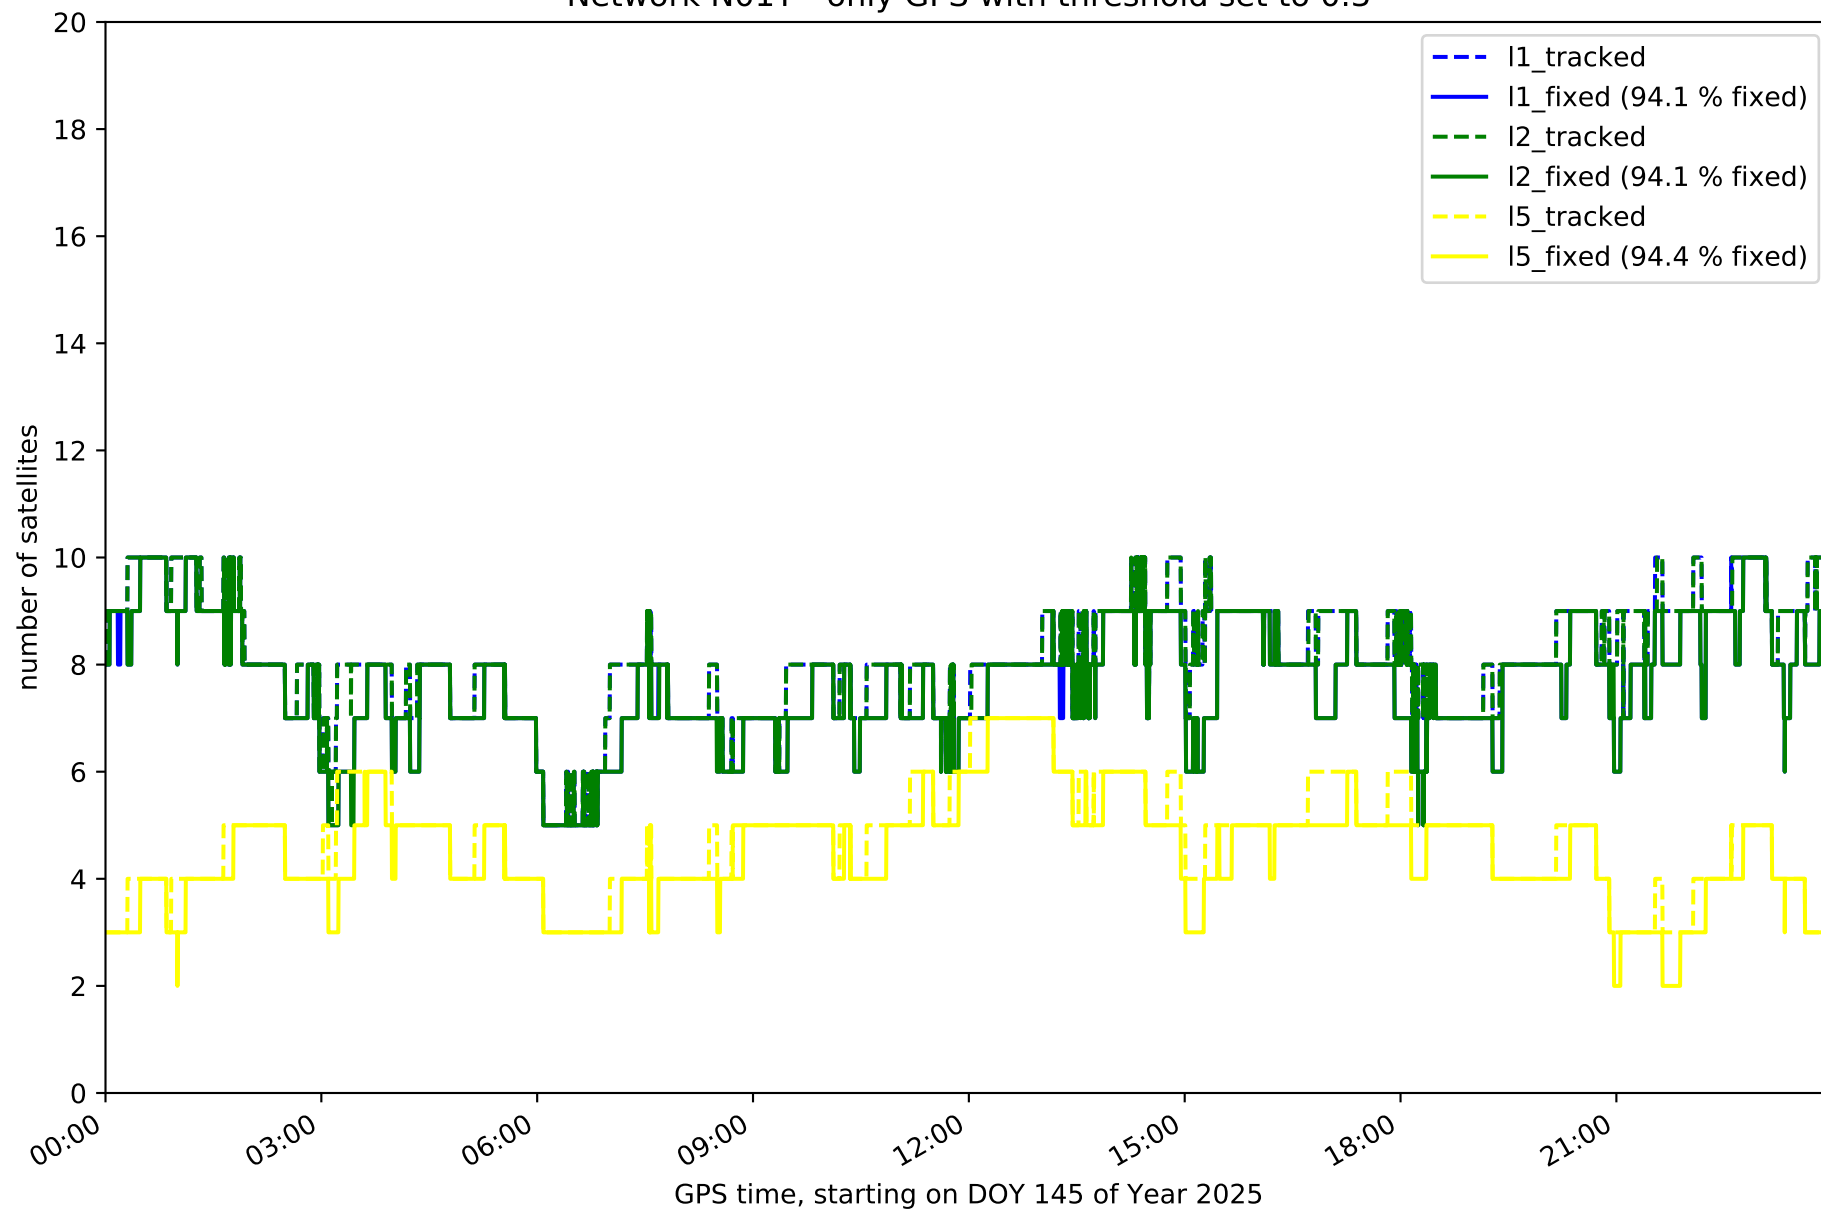


Network N01T - only GLONASS with threshold set to 0.3

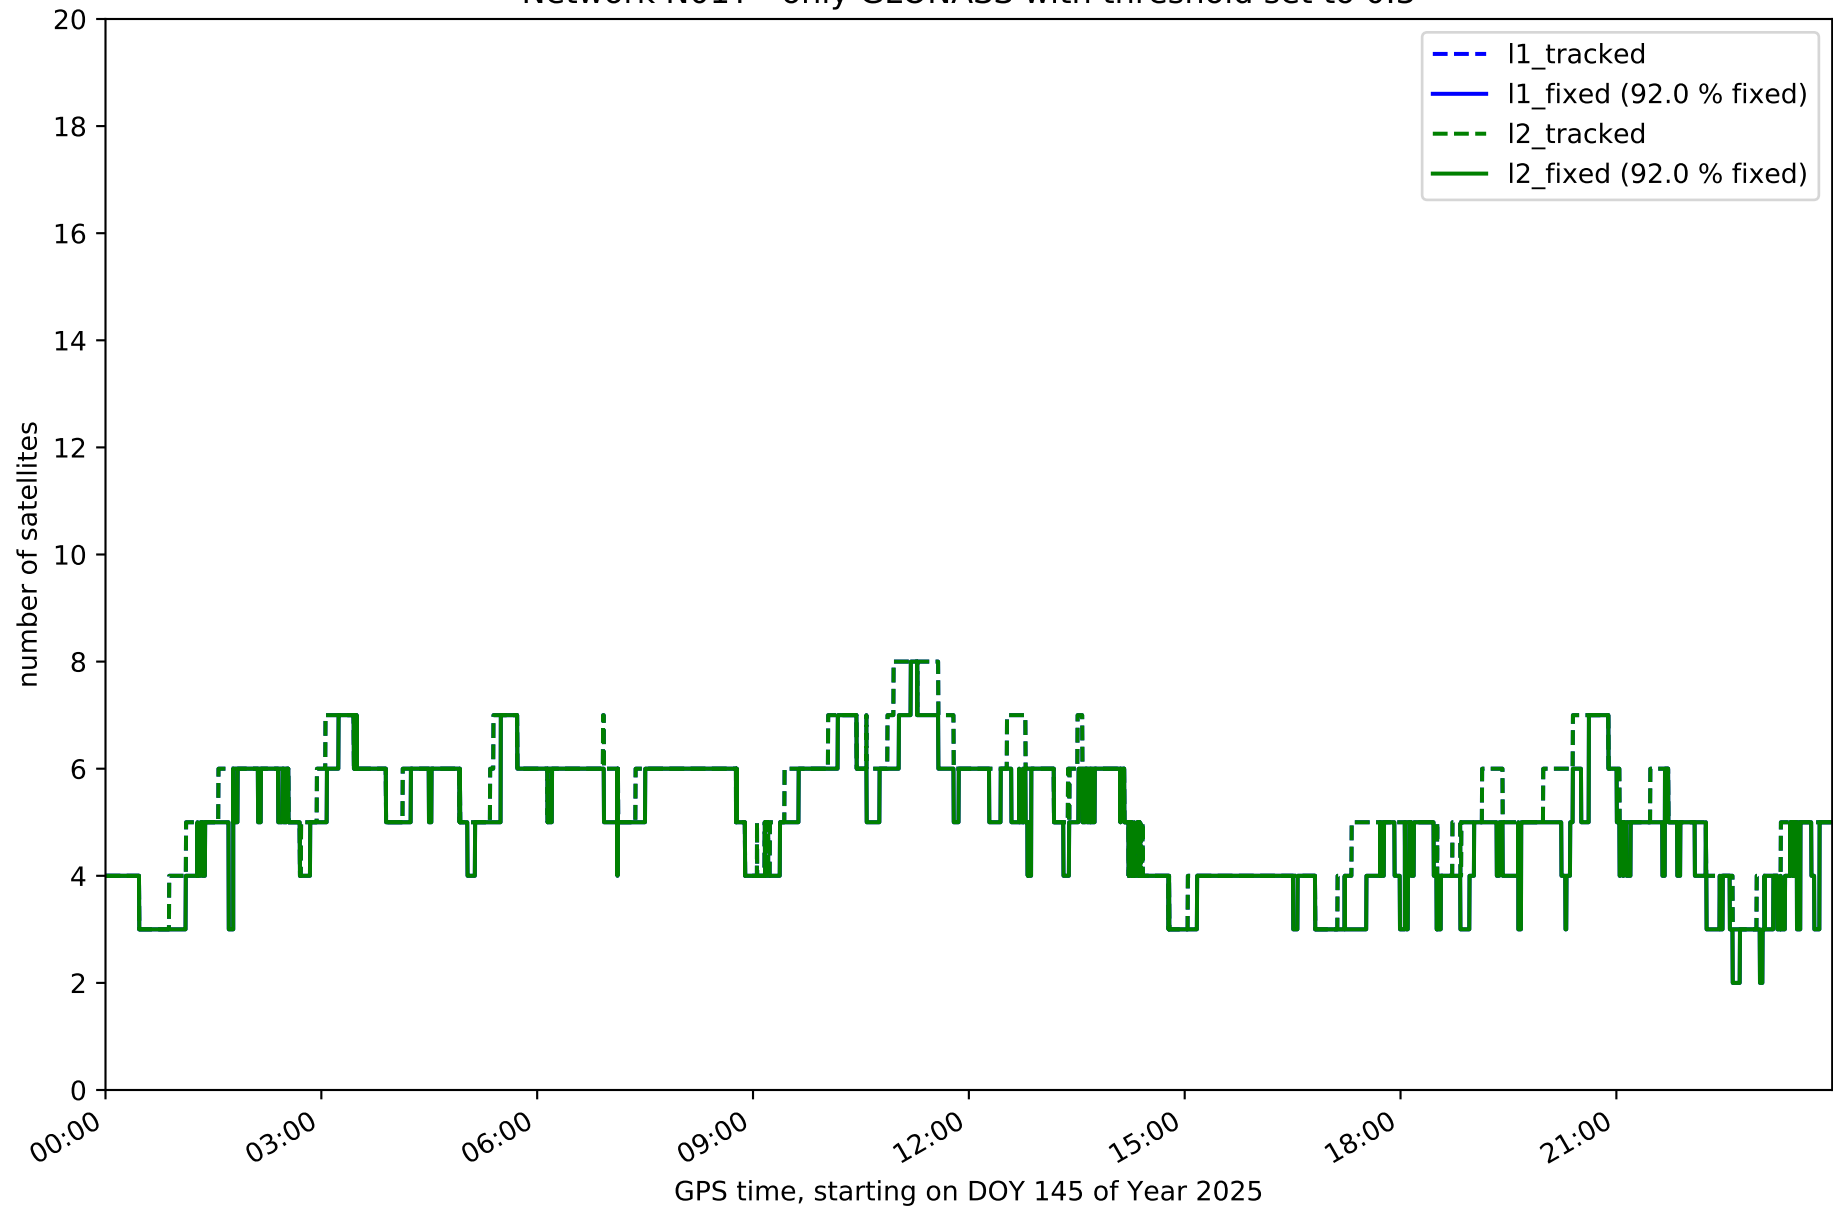


Network N01T - only BDS with threshold set to 0.3

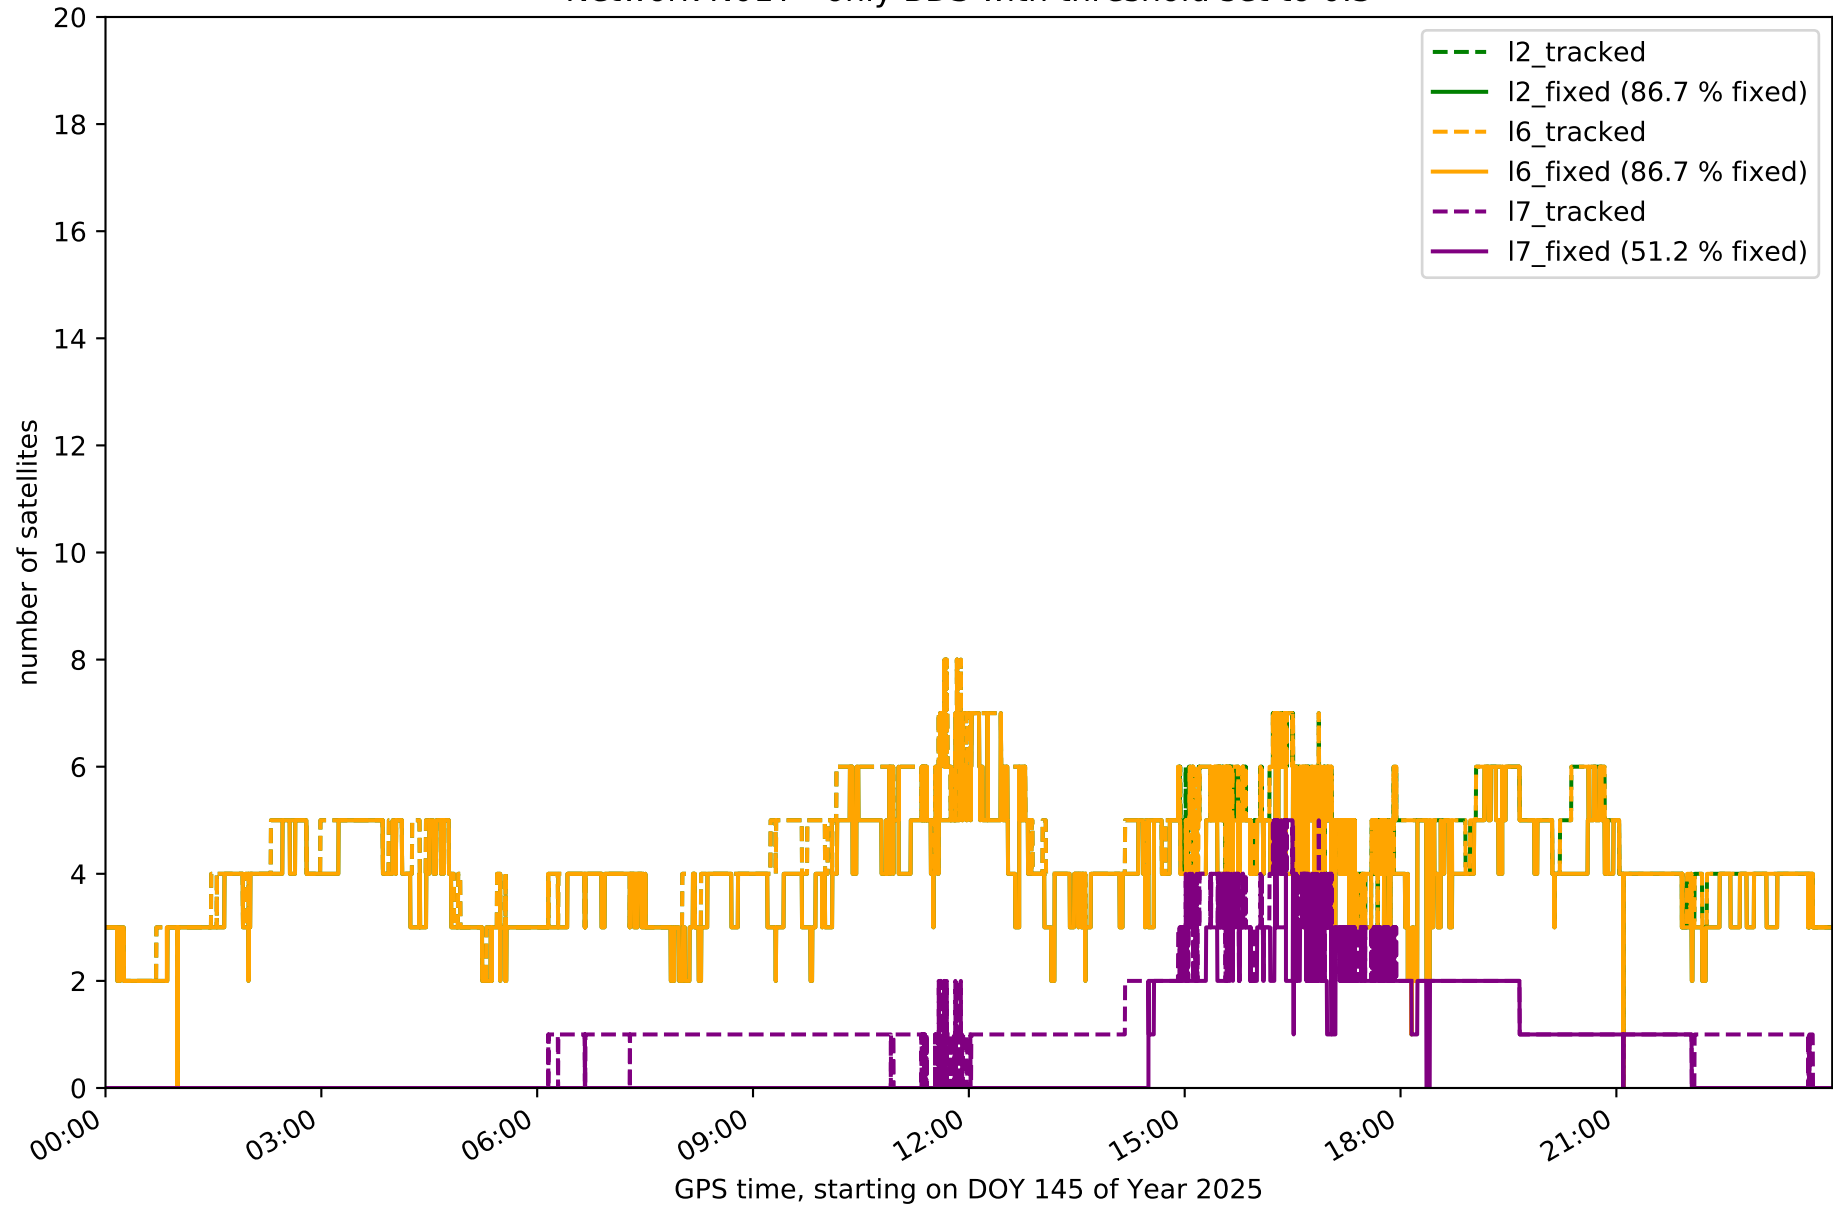

Network N01T - only Galileo with threshold set to 0.3

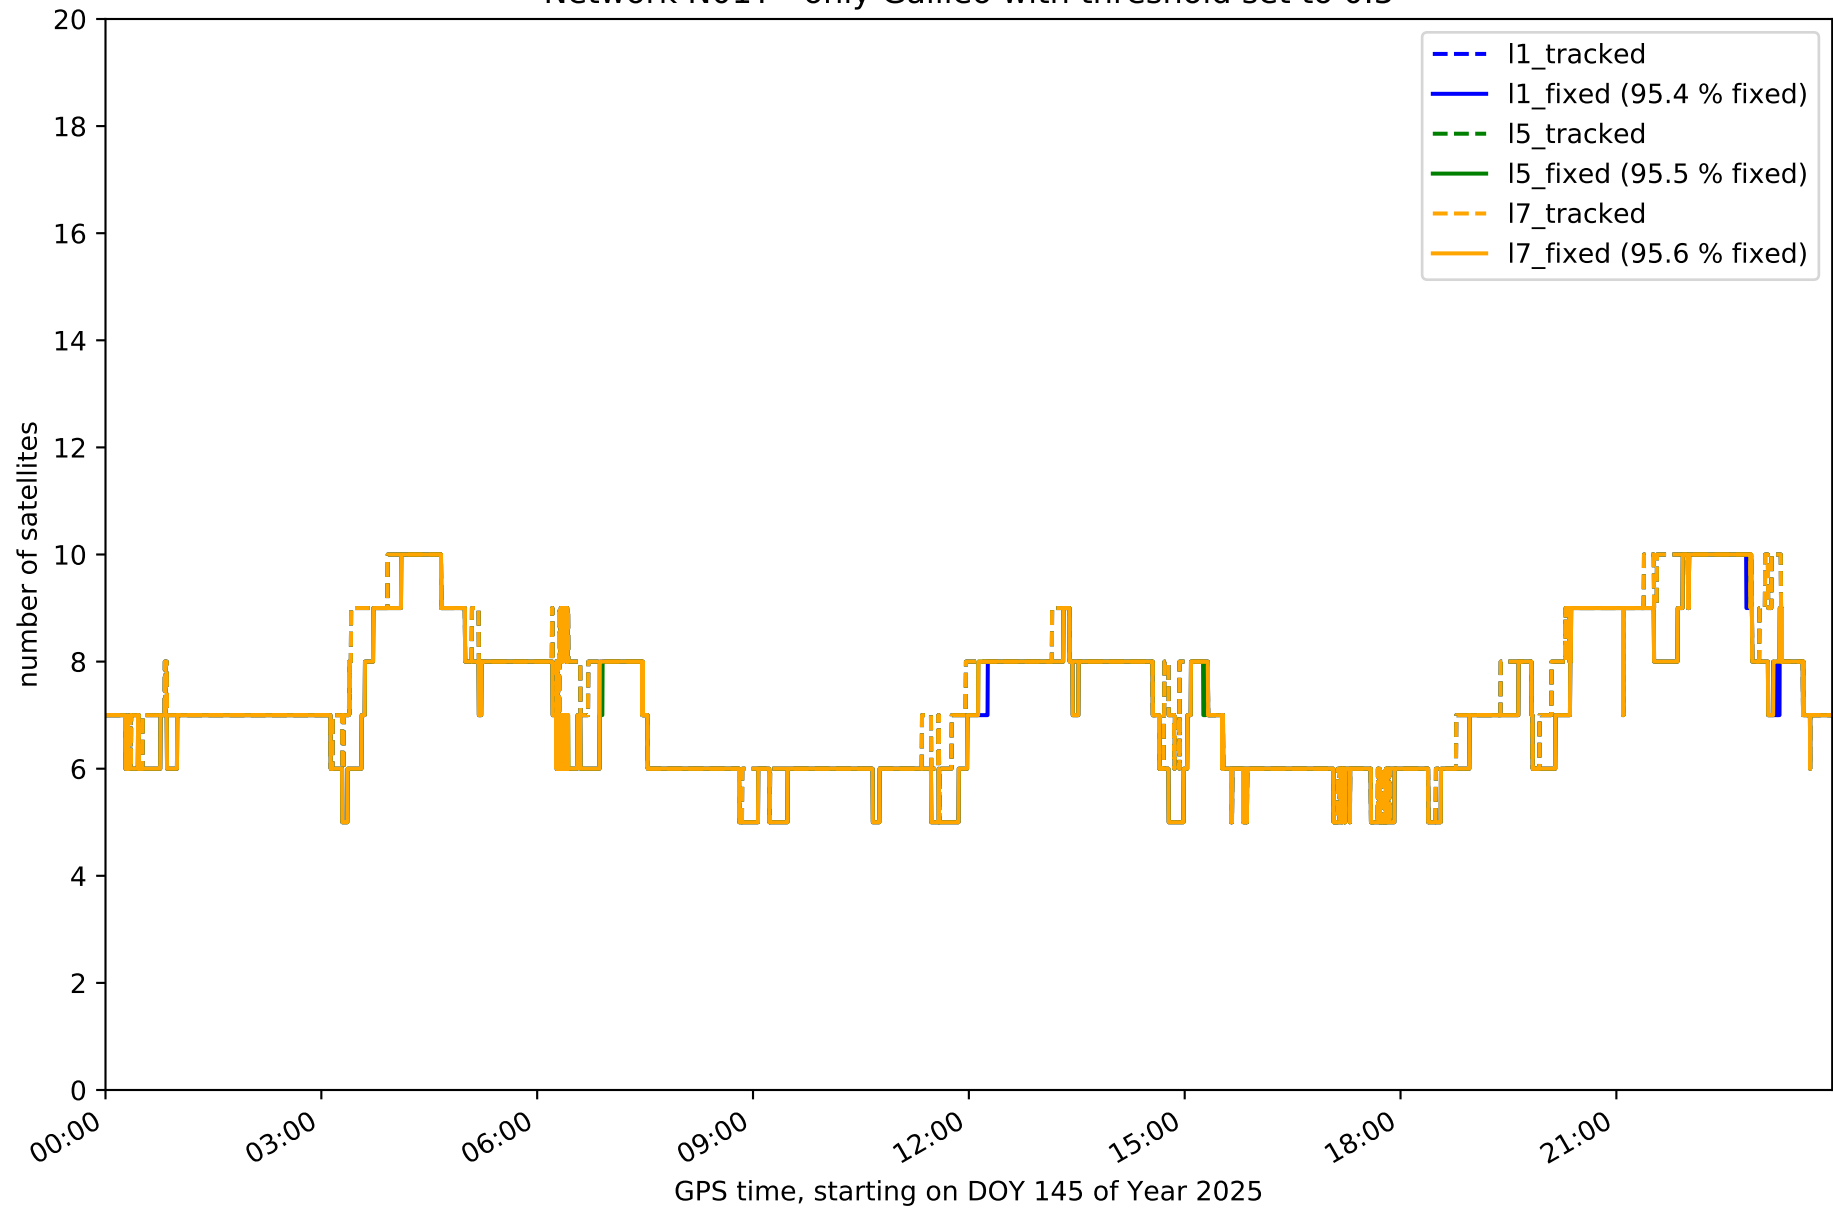


Station ARAJ in network N01T

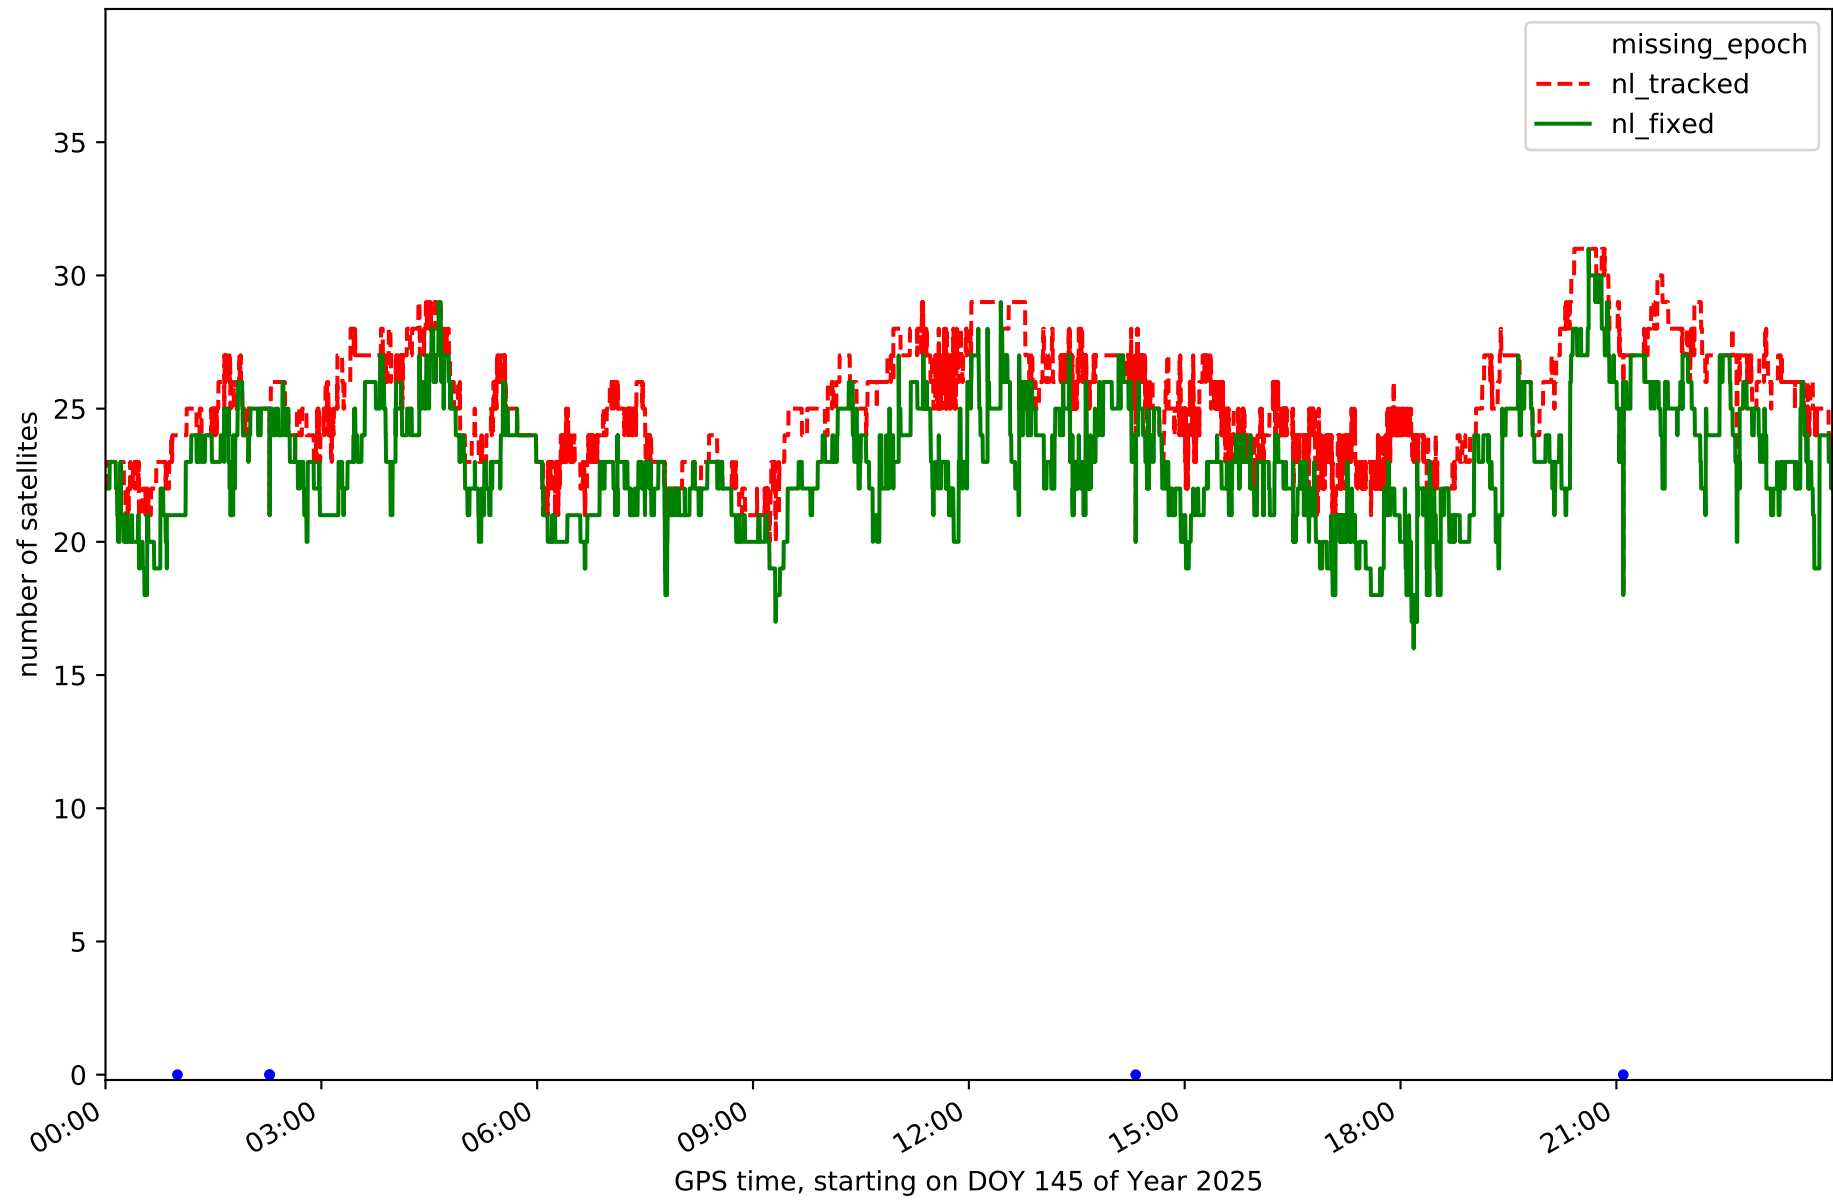


Station BUIT in network N01T




Station IGNE in network N01T

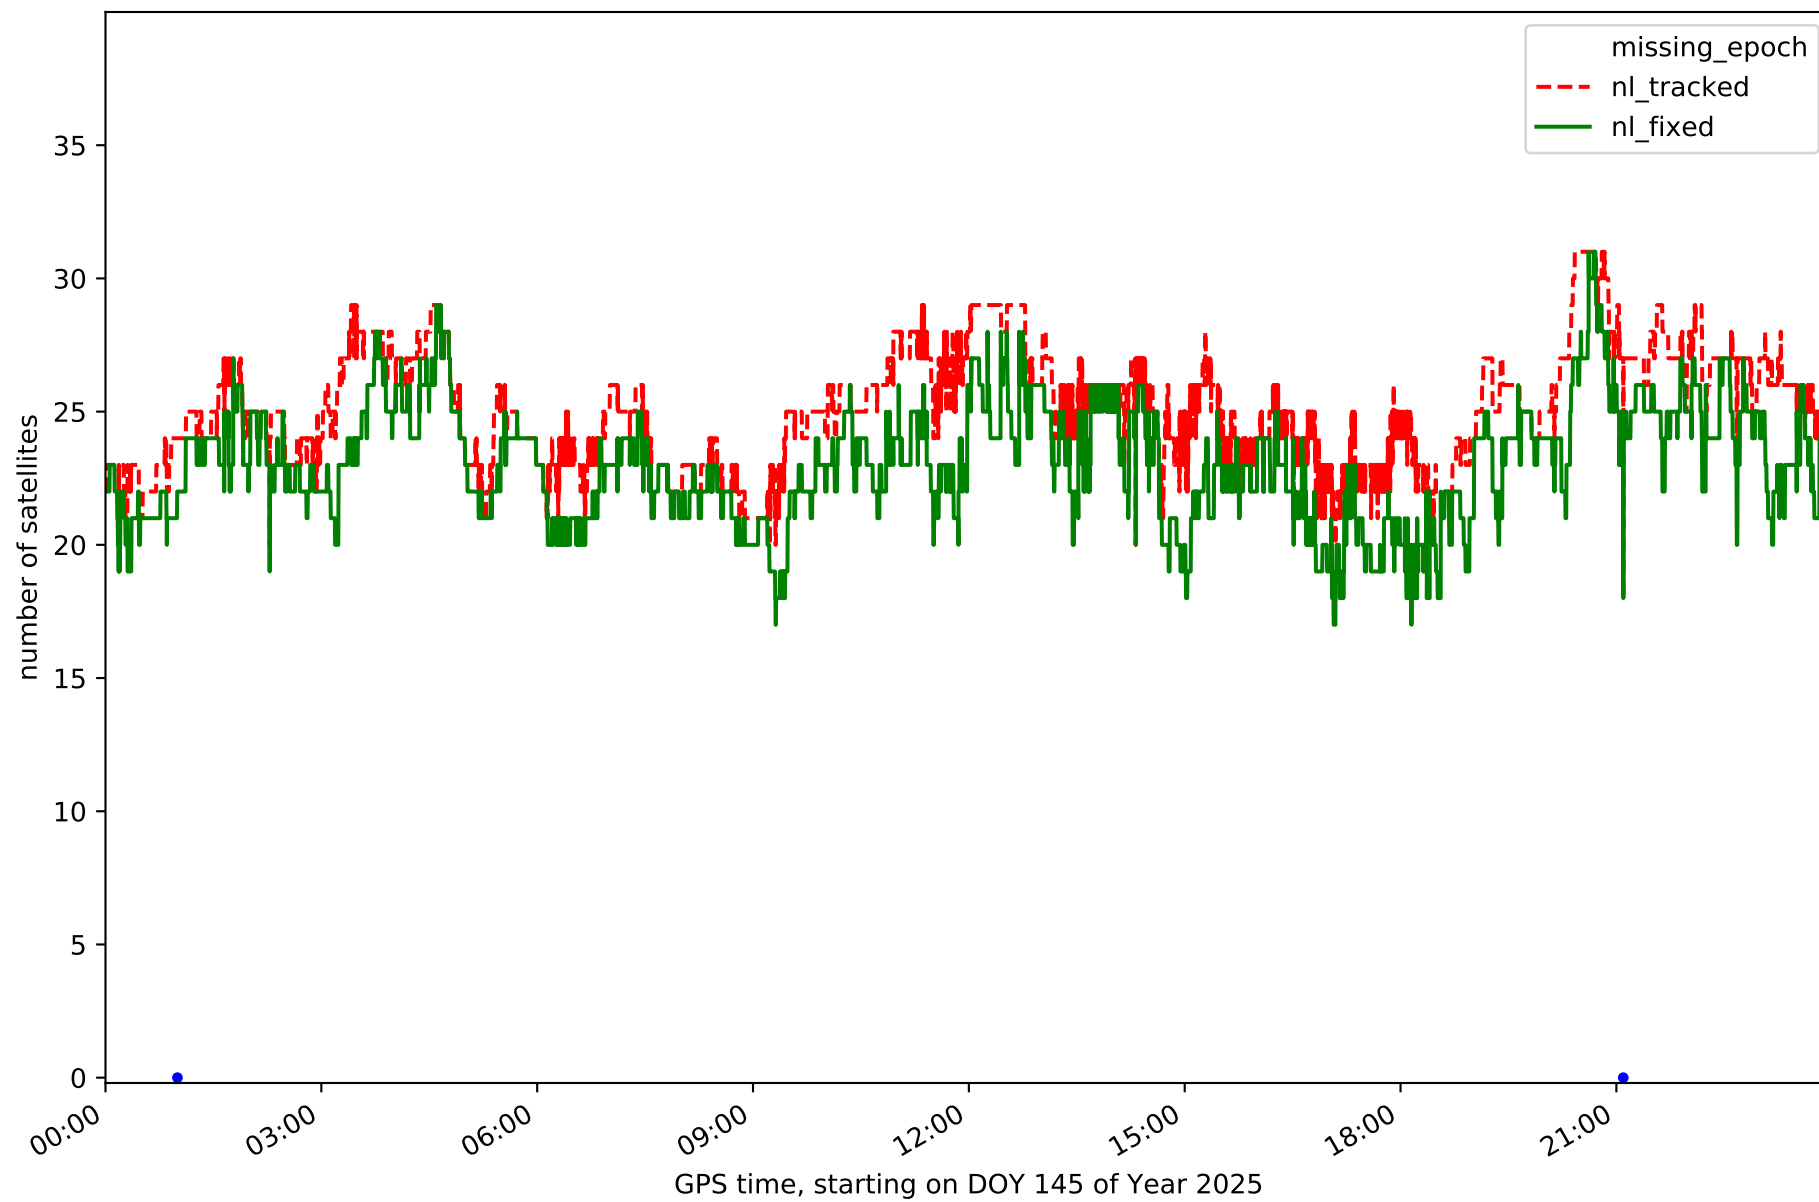


Station MAD1 in network N01T

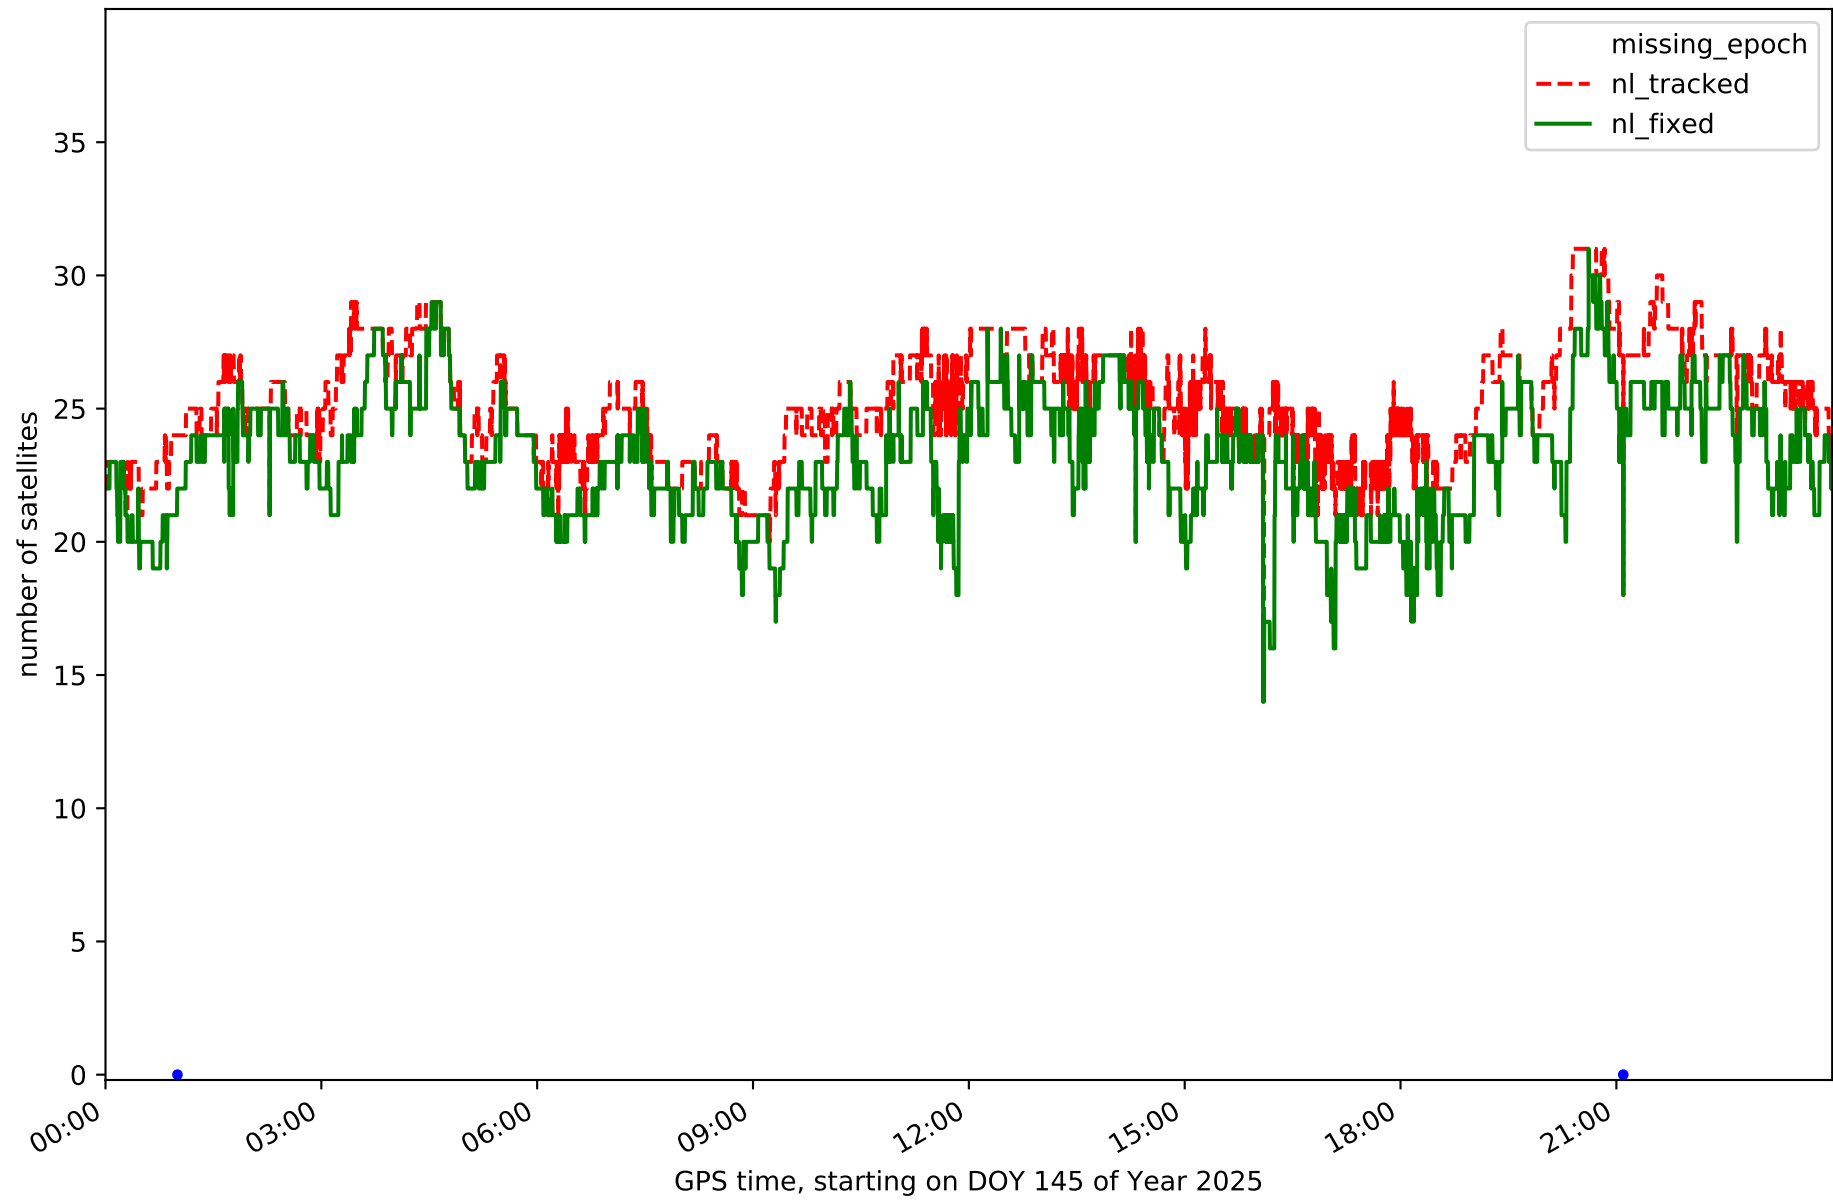


Station ORUS in network N01T

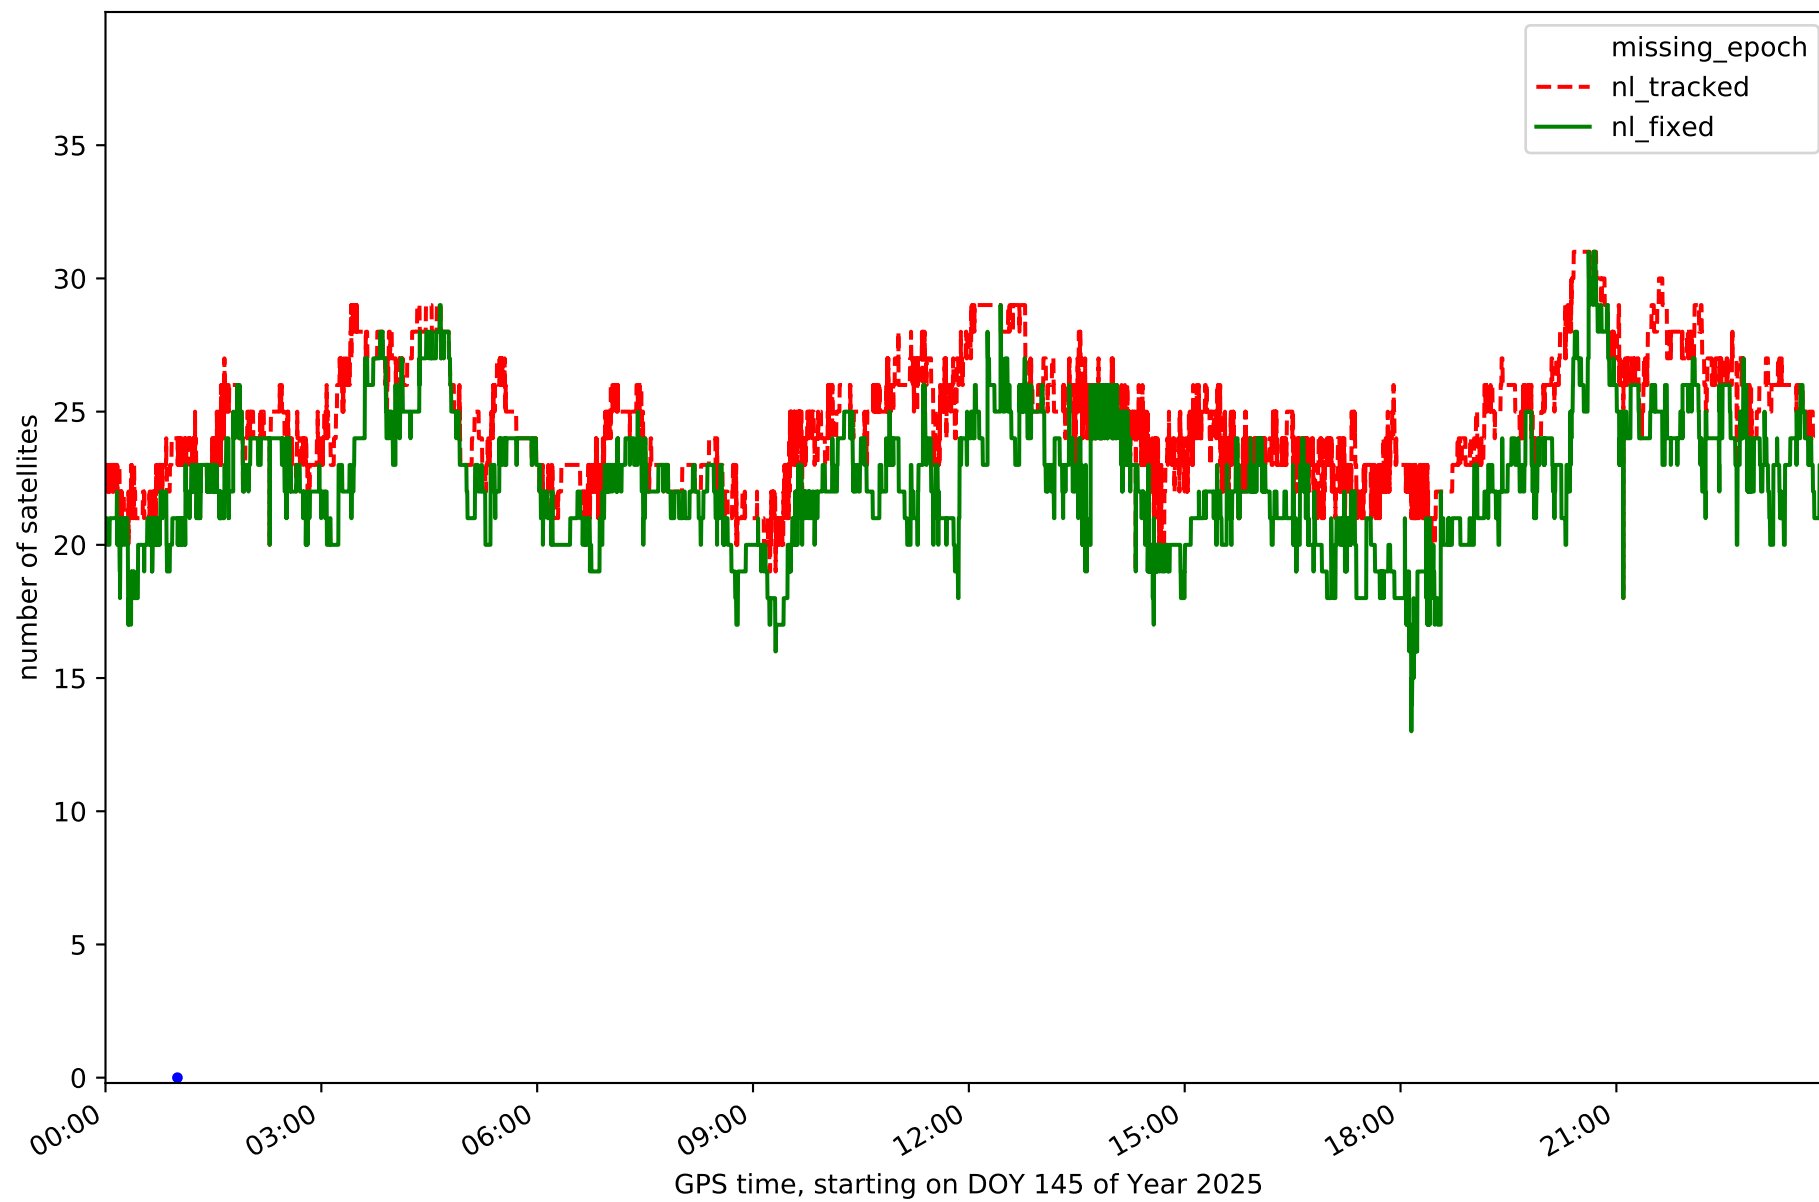


Station SMDV in network N01T

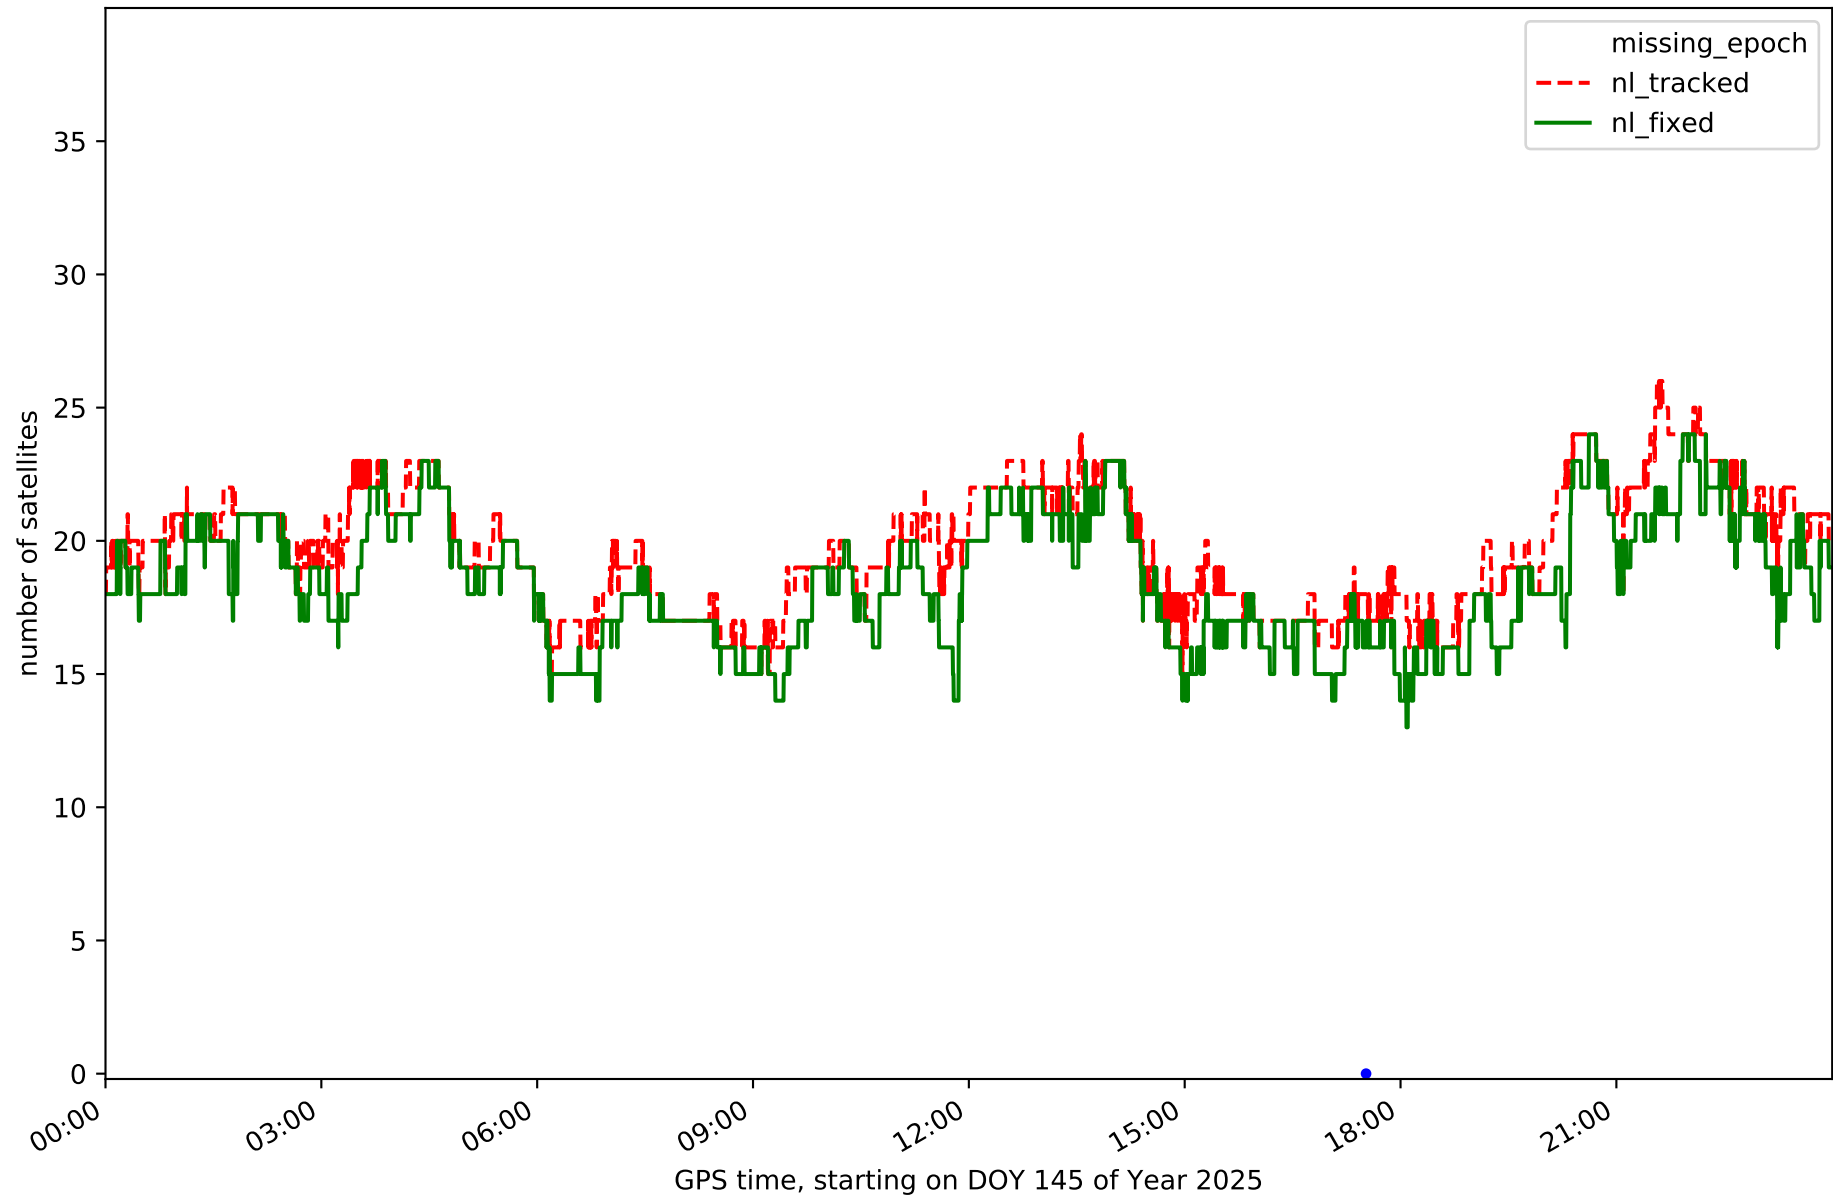


Station TALV in network N01T

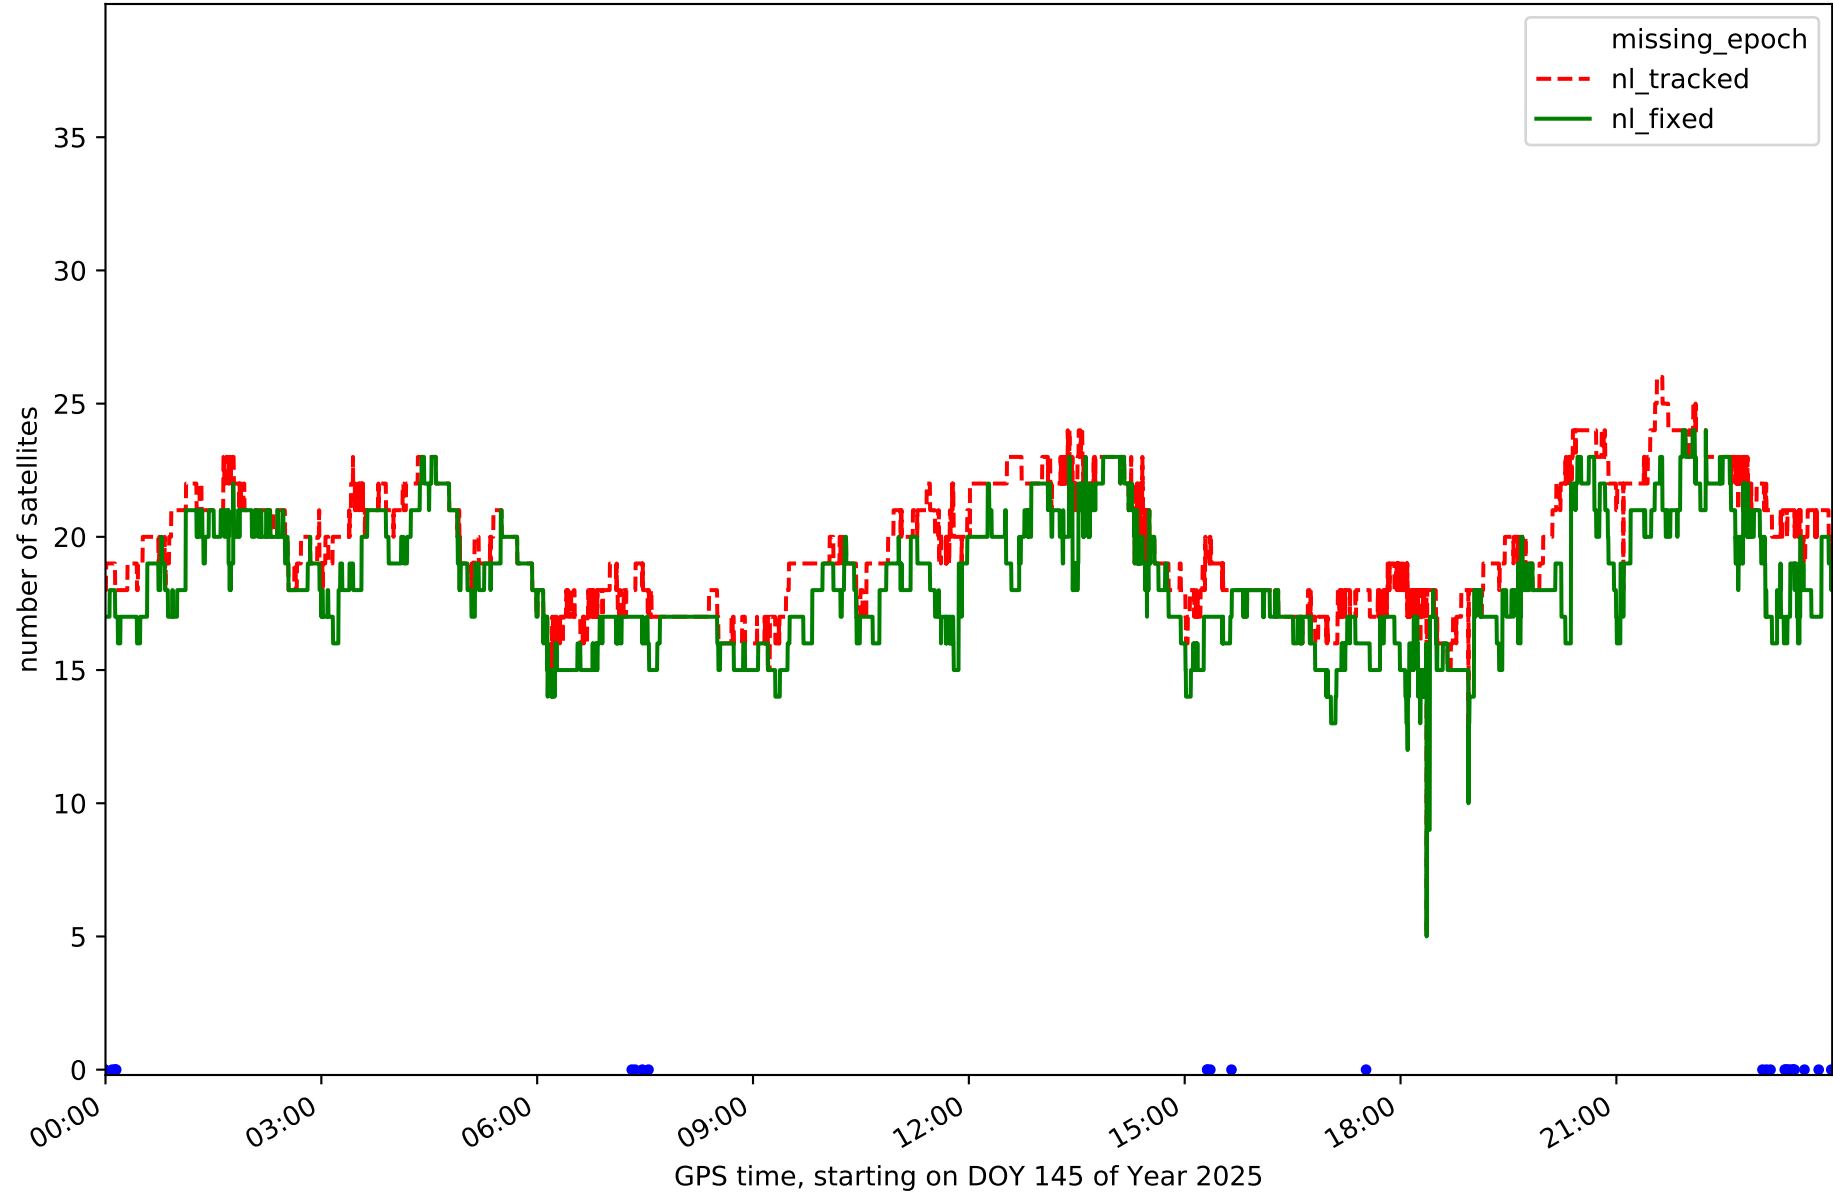


Station YEB1 in network N01T

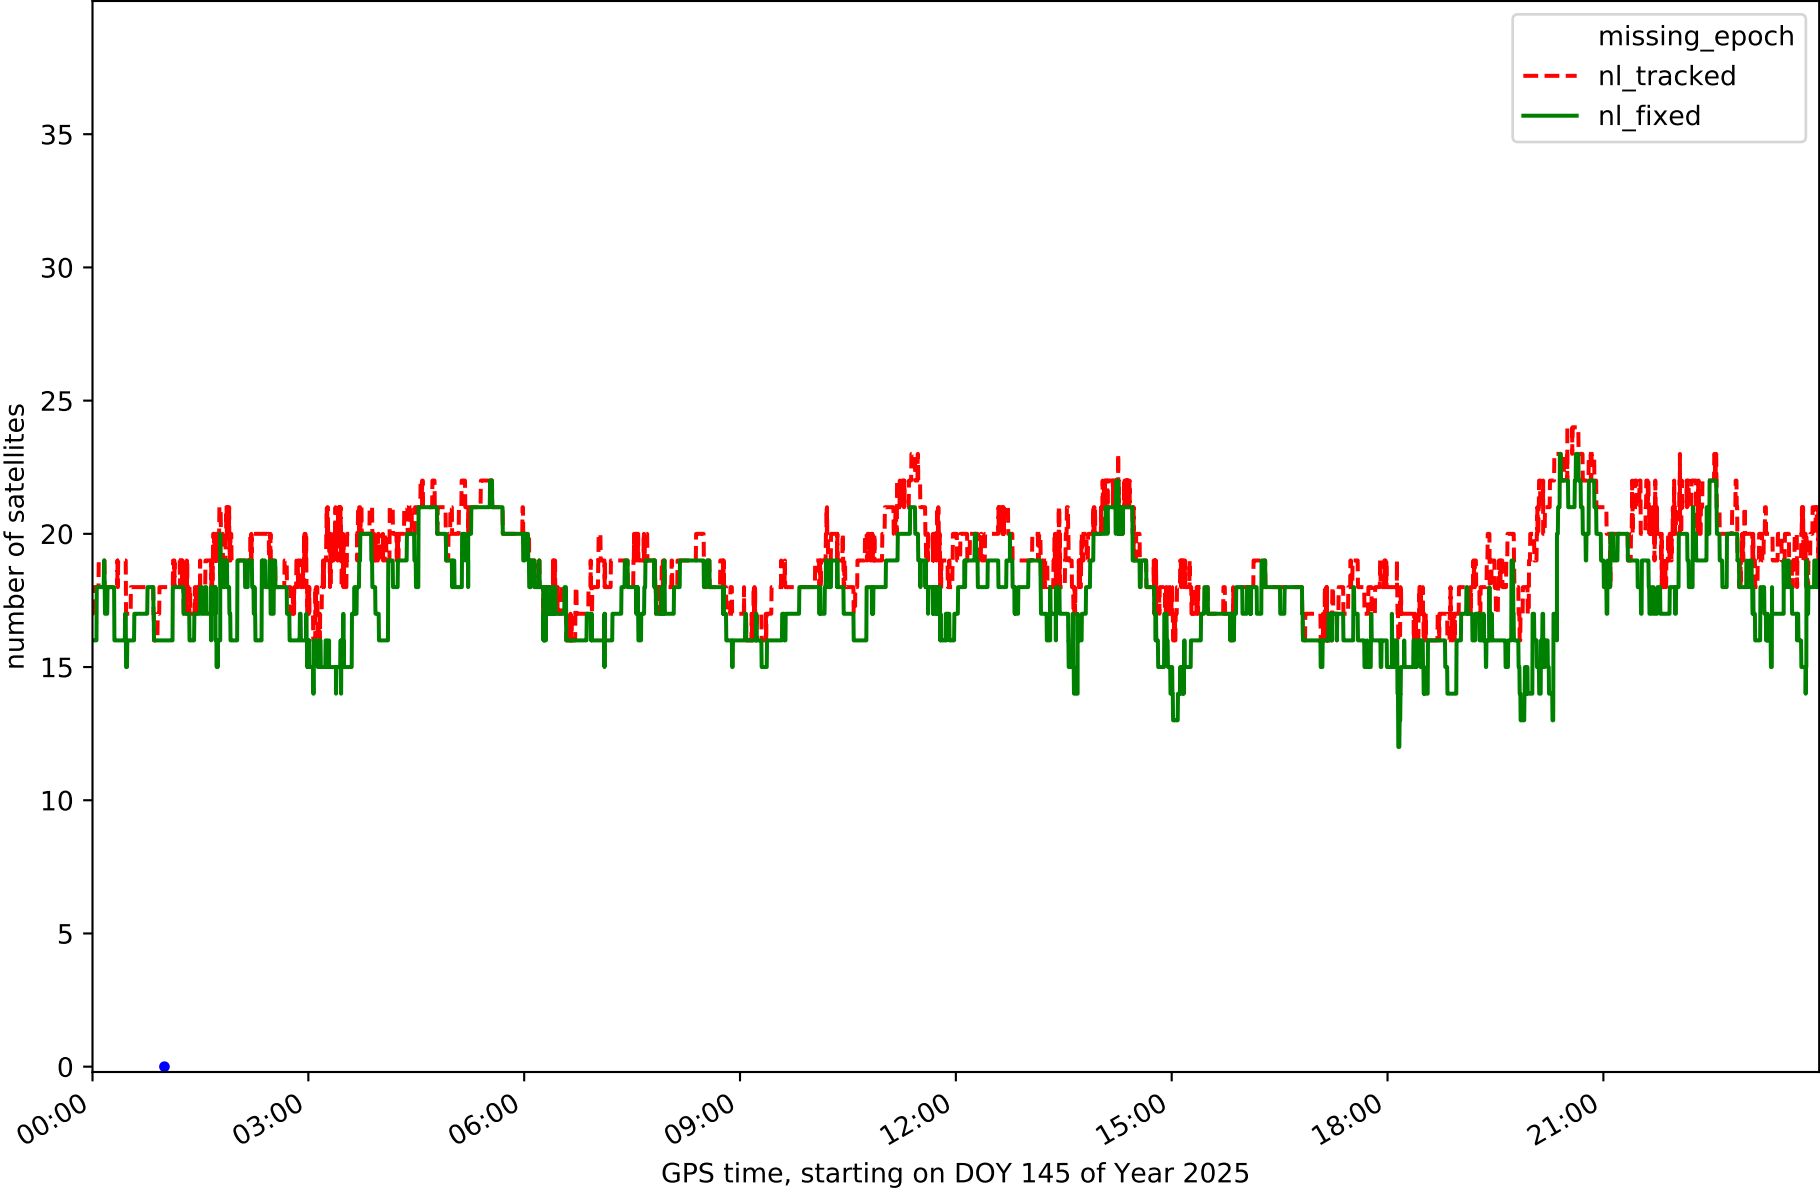


RefCheck for station ARAJ in network N01T

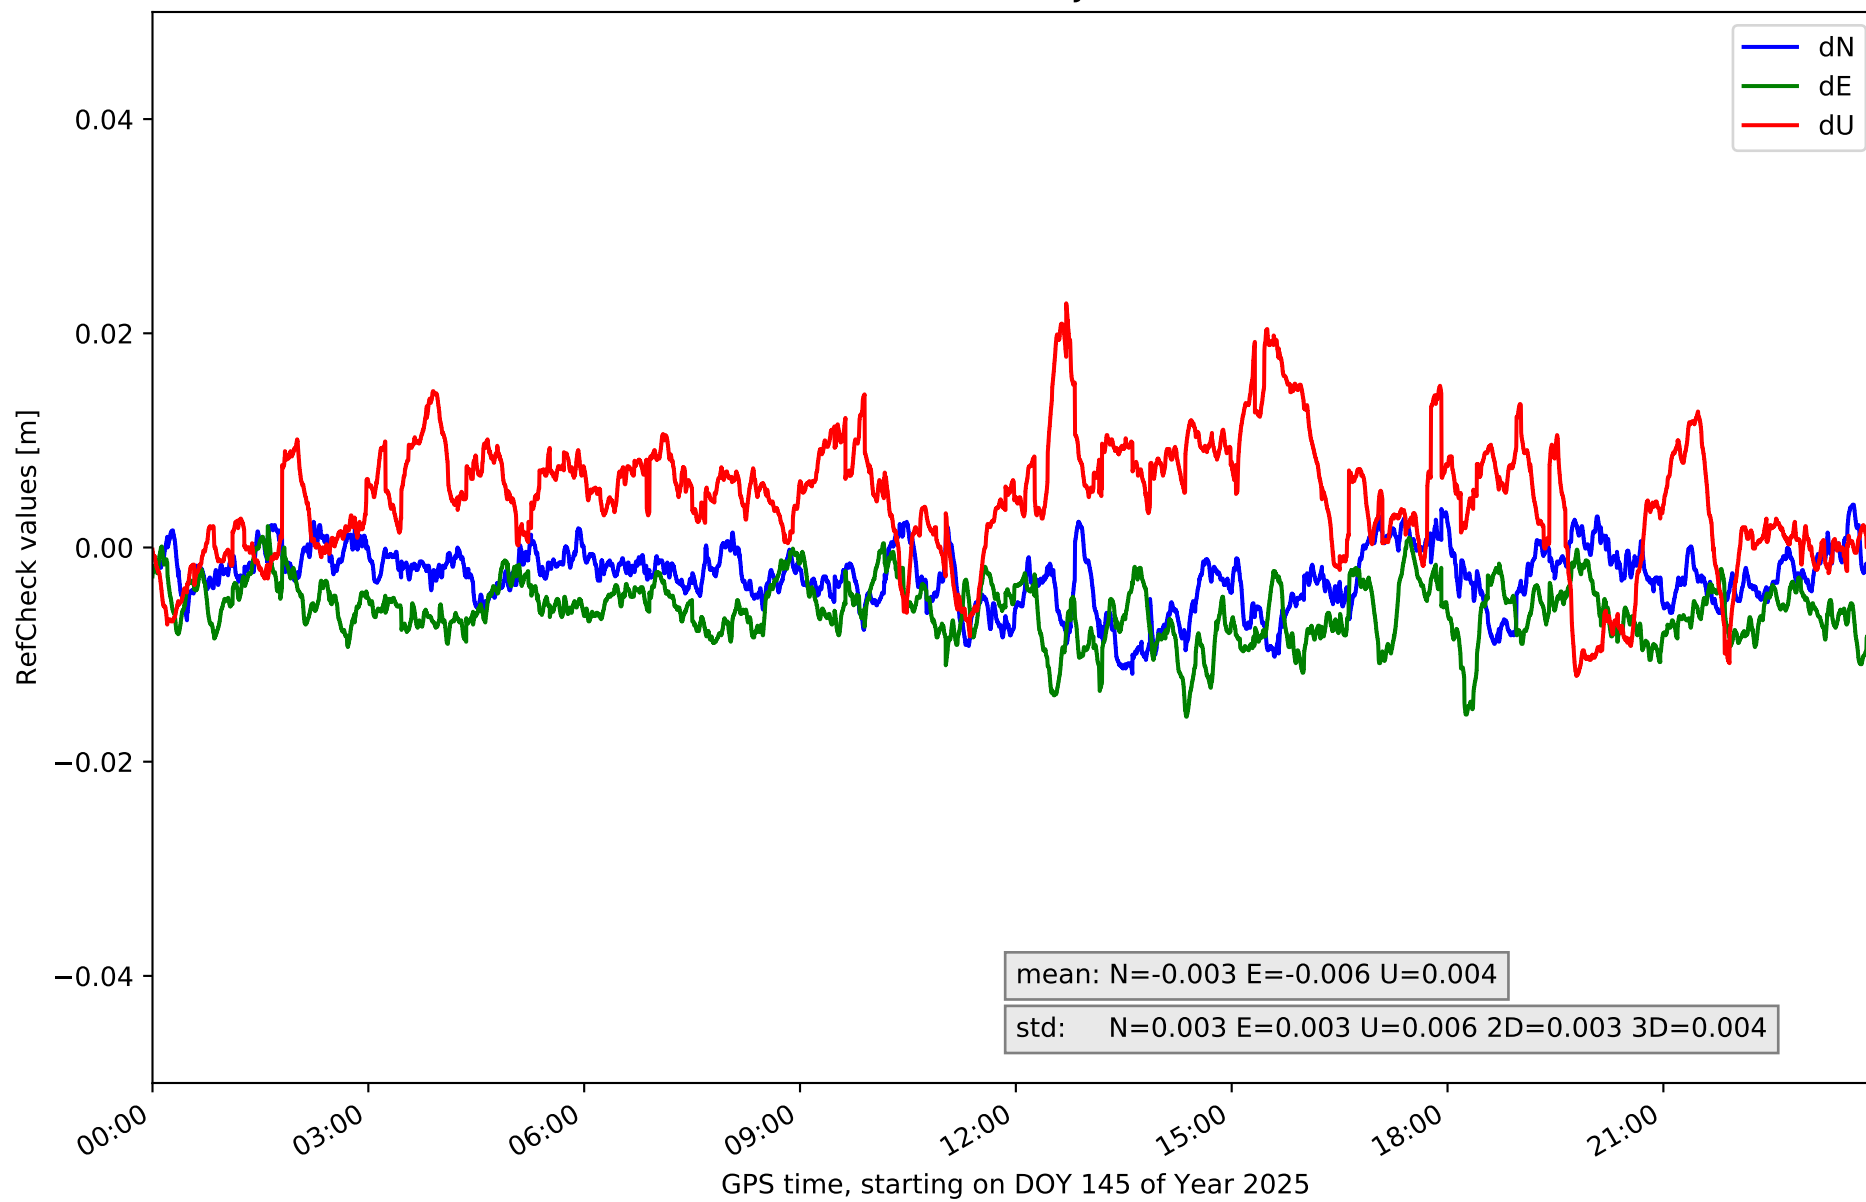


RefCheck for station BUIT in network N01T

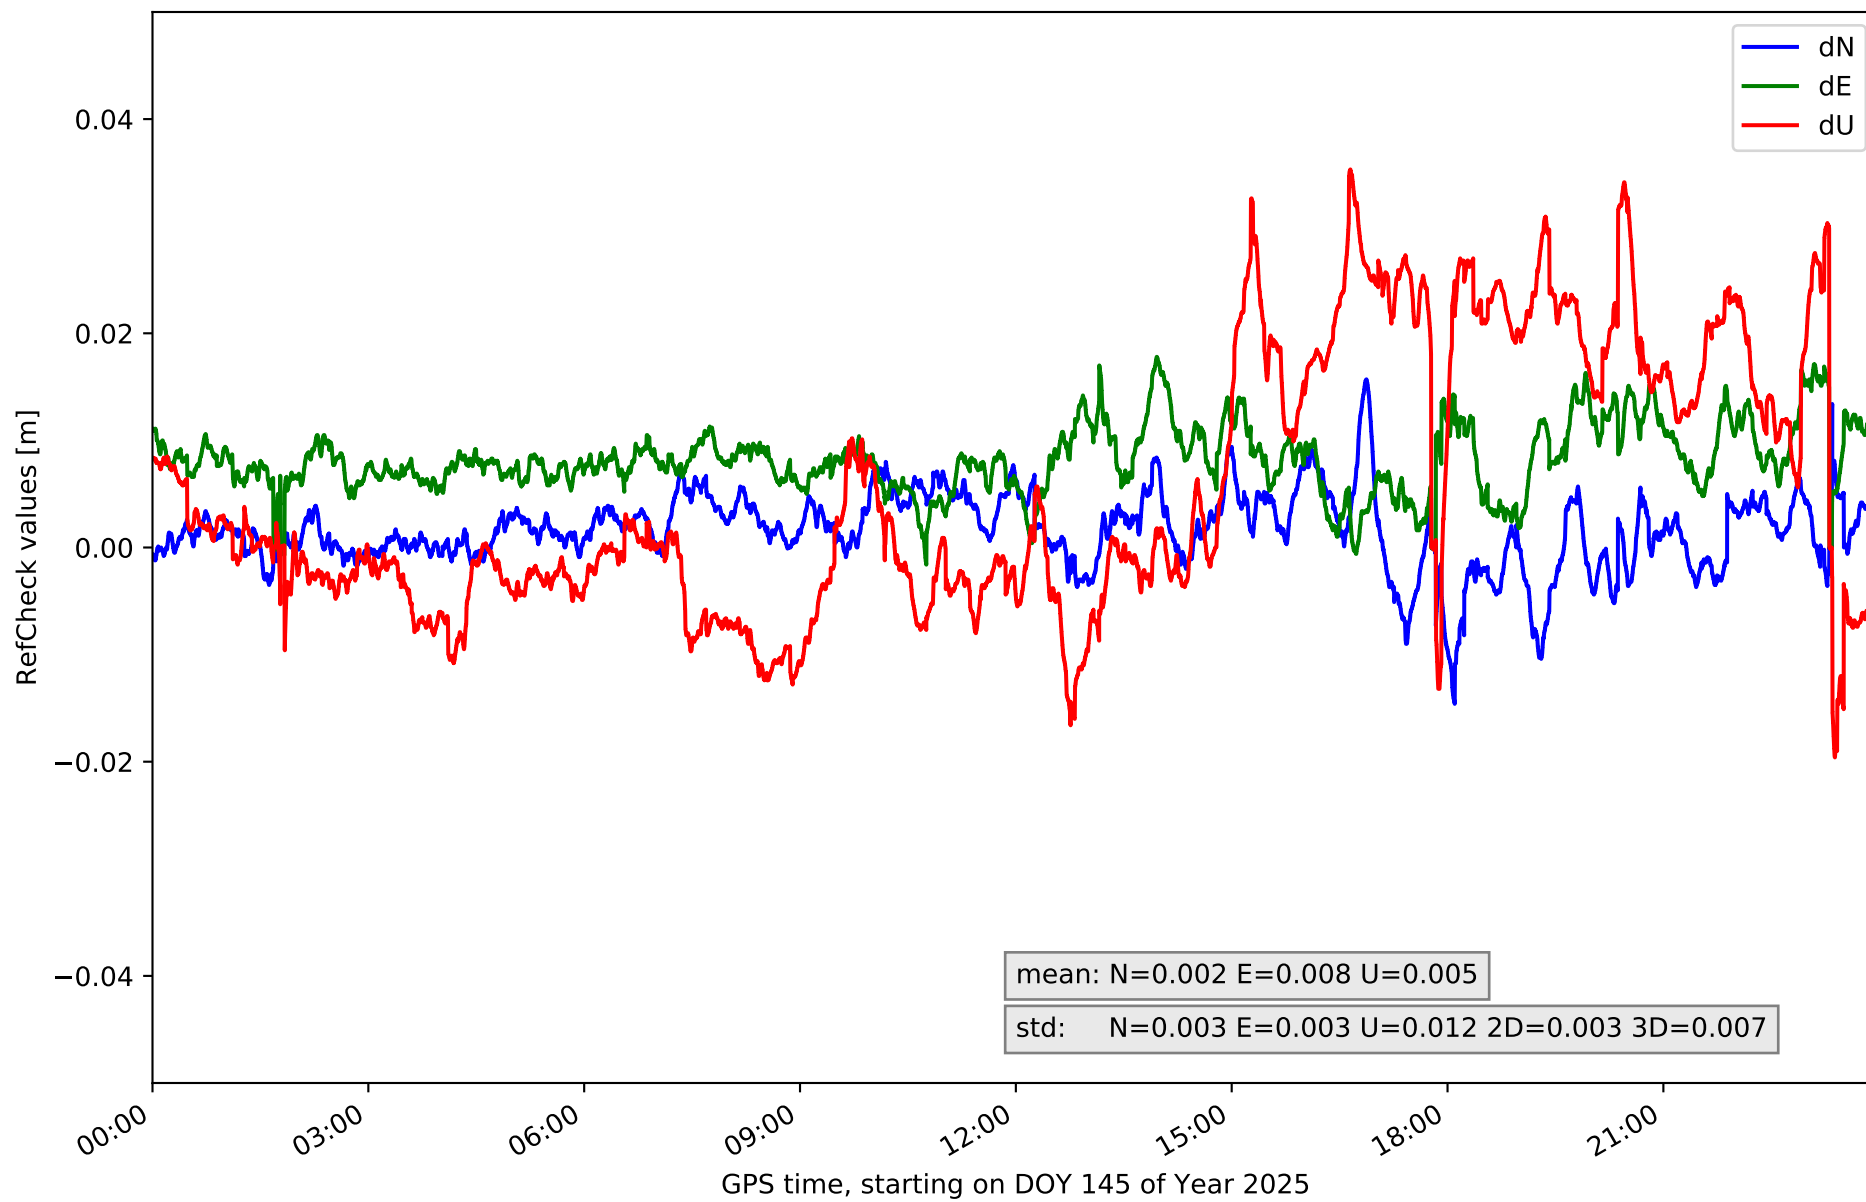


RefCheck for station IGNE in network N01T

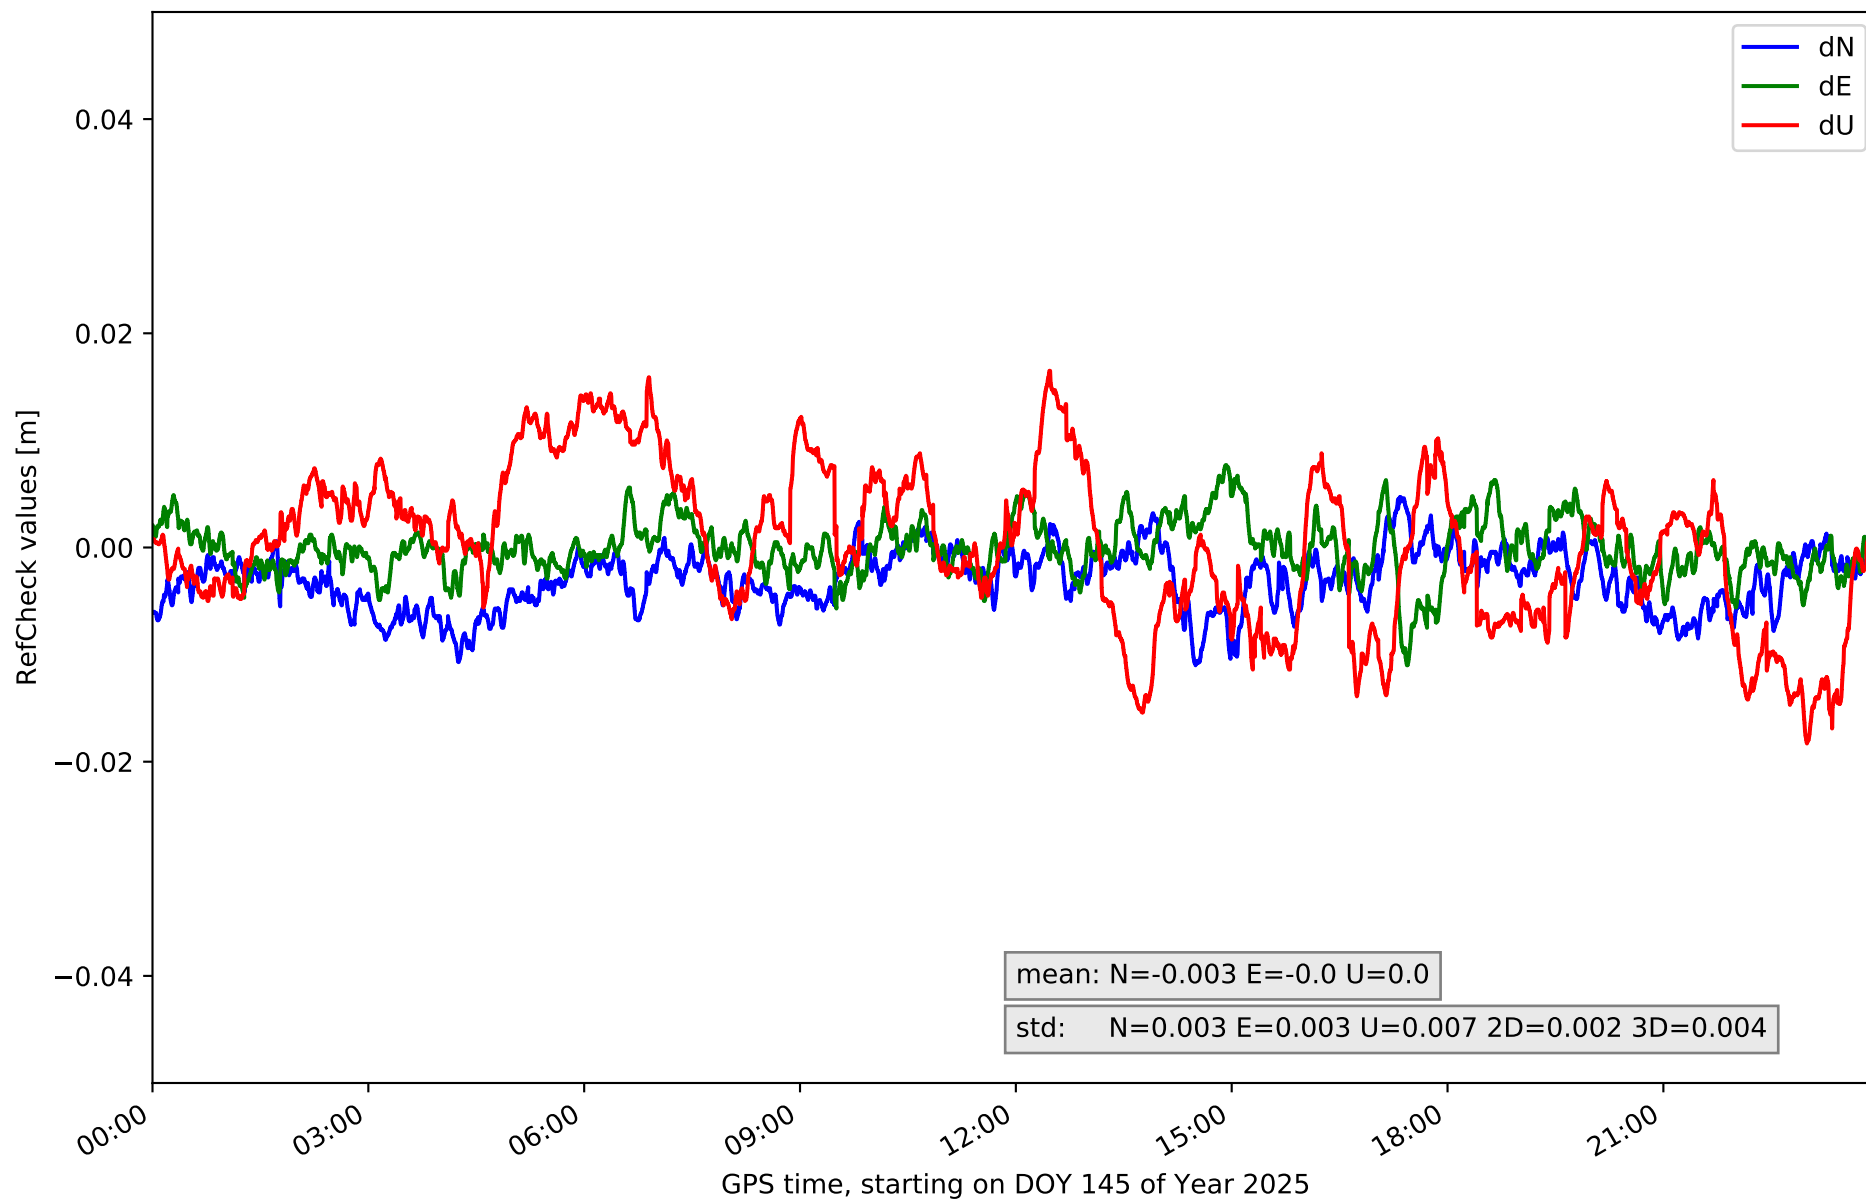


RefCheck for station MAD1 in network N01T

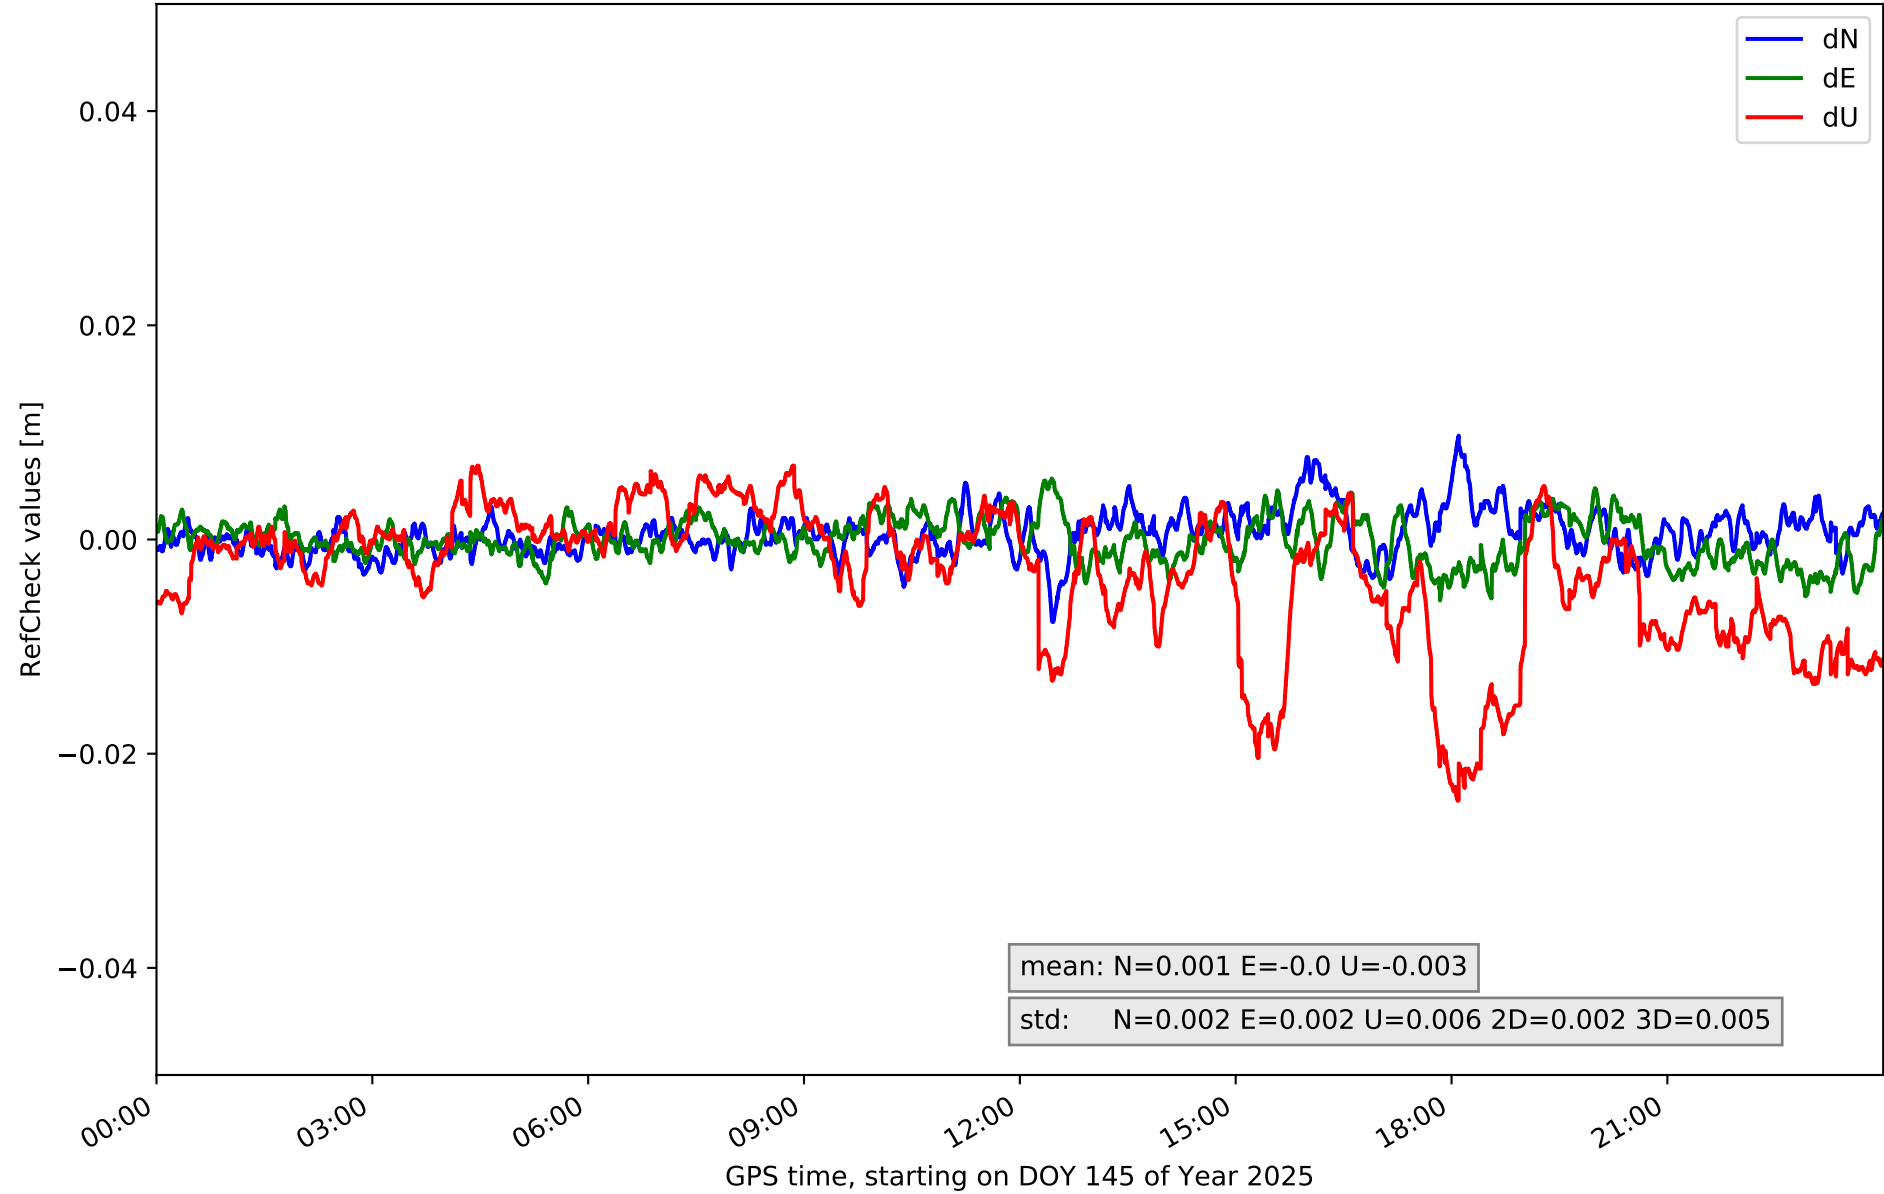


RefCheck for station ORUS in network N01T

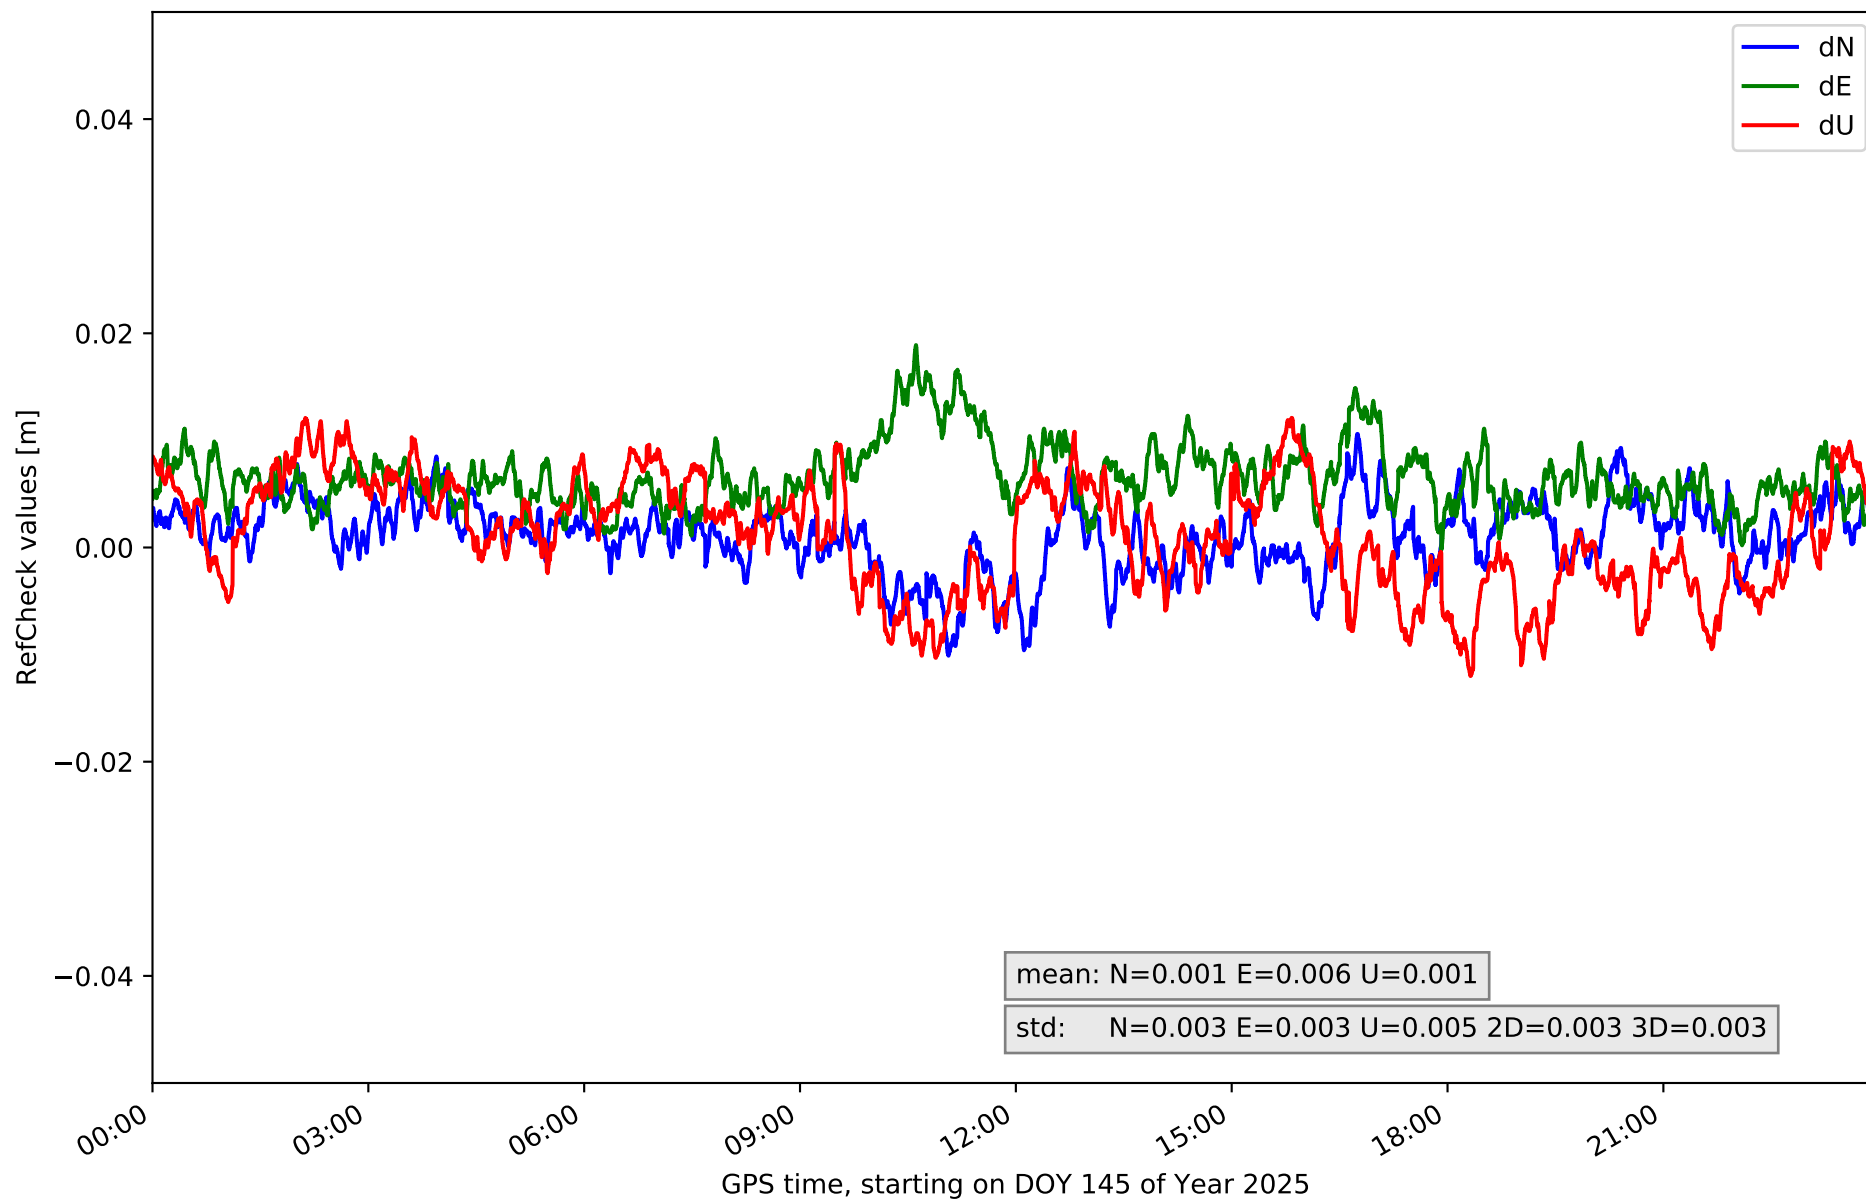


RefCheck for station SMDV in network N01T

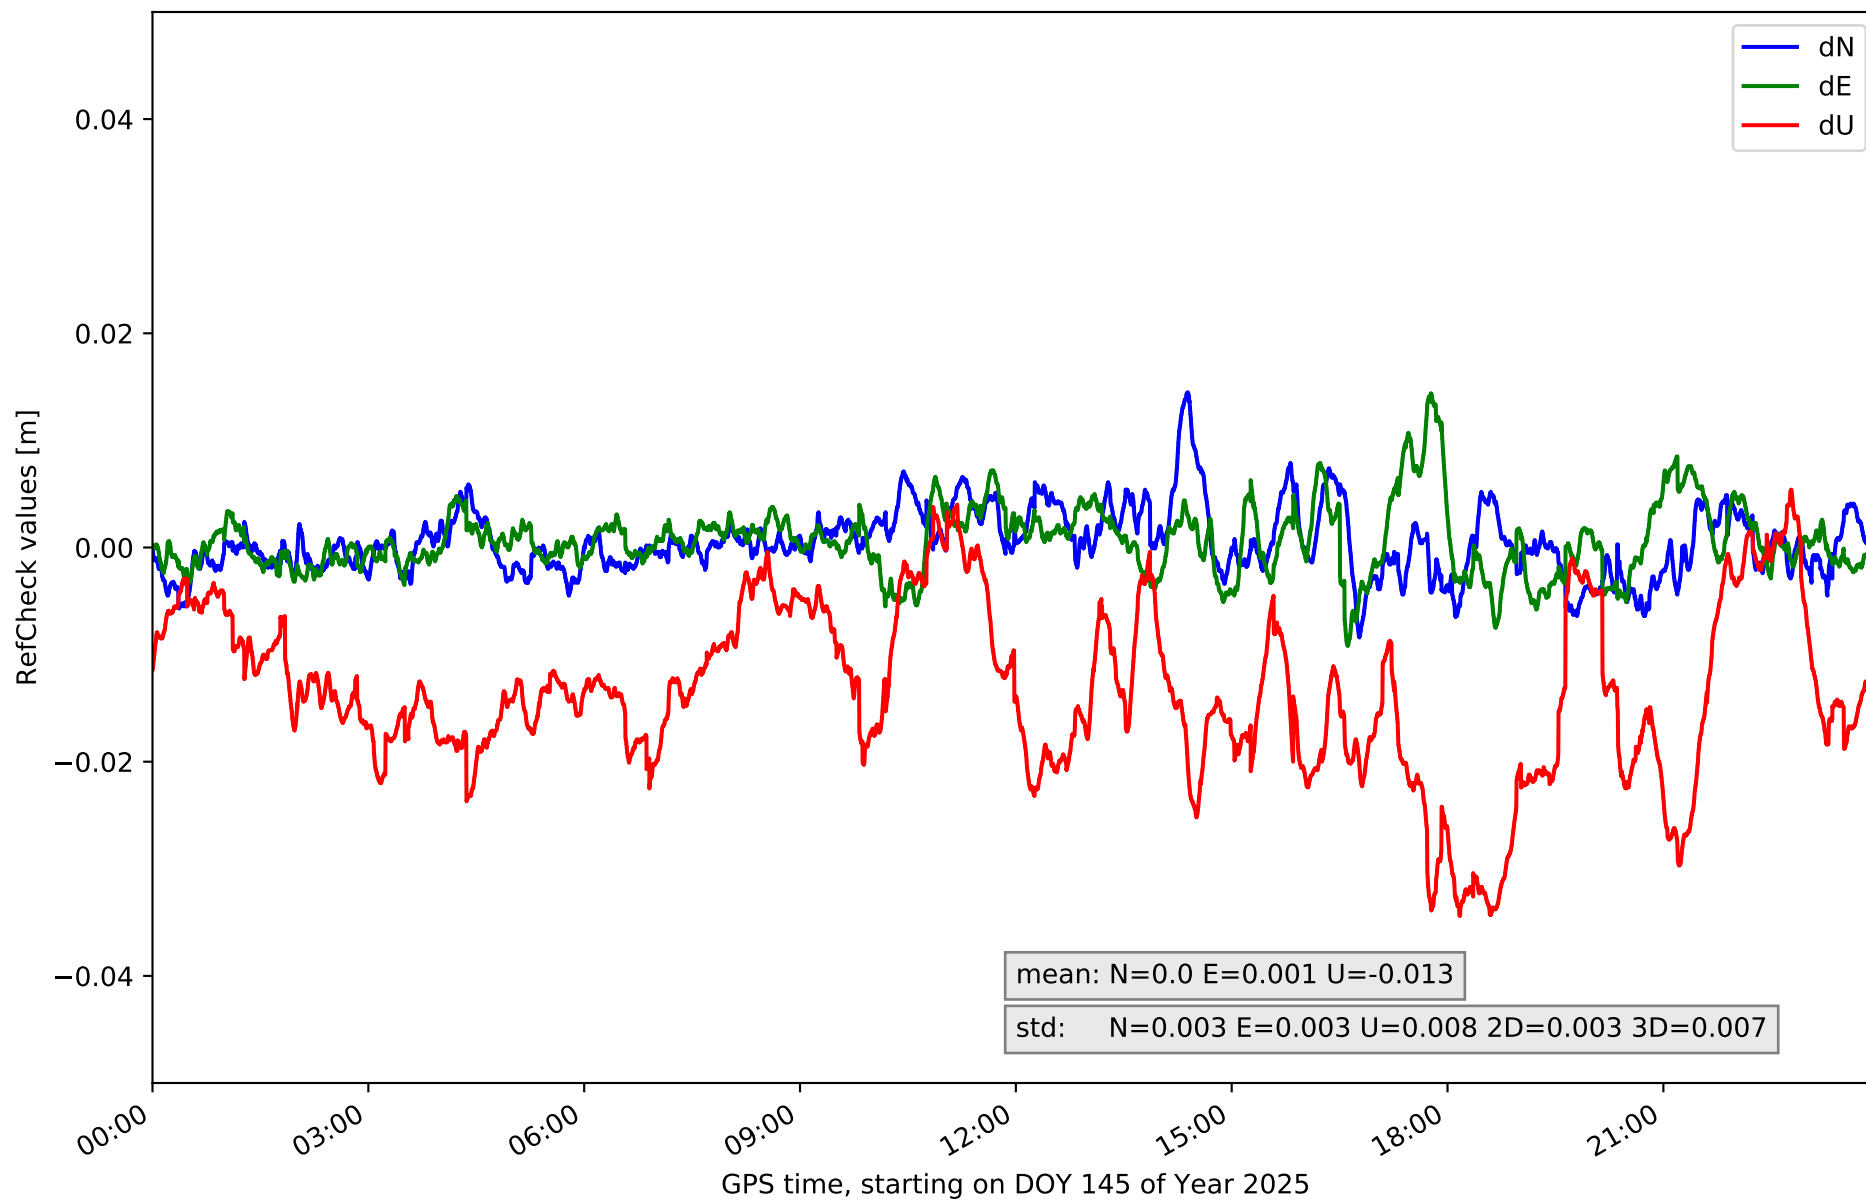

RefCheck for station TALV in network N01T

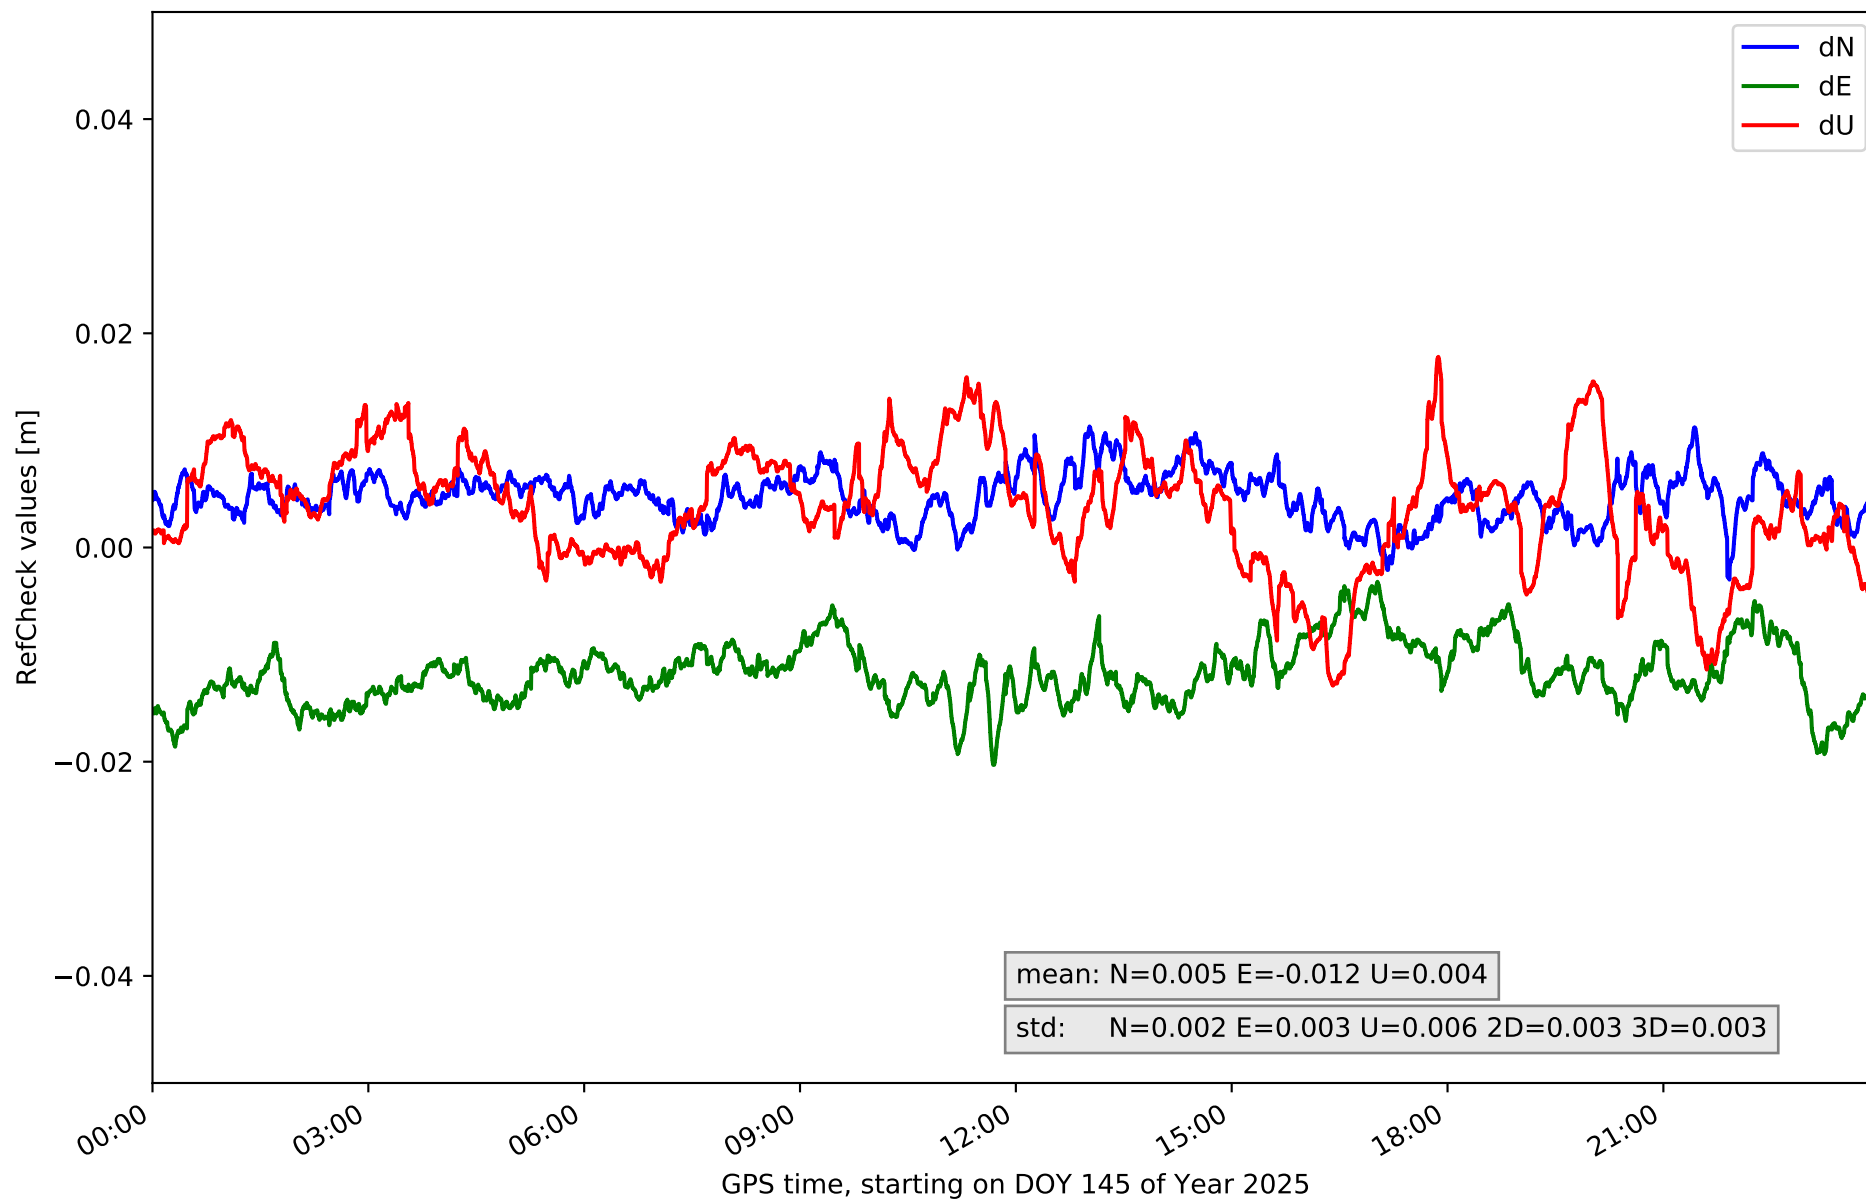

RefCheck for station YEB1 in network N01T

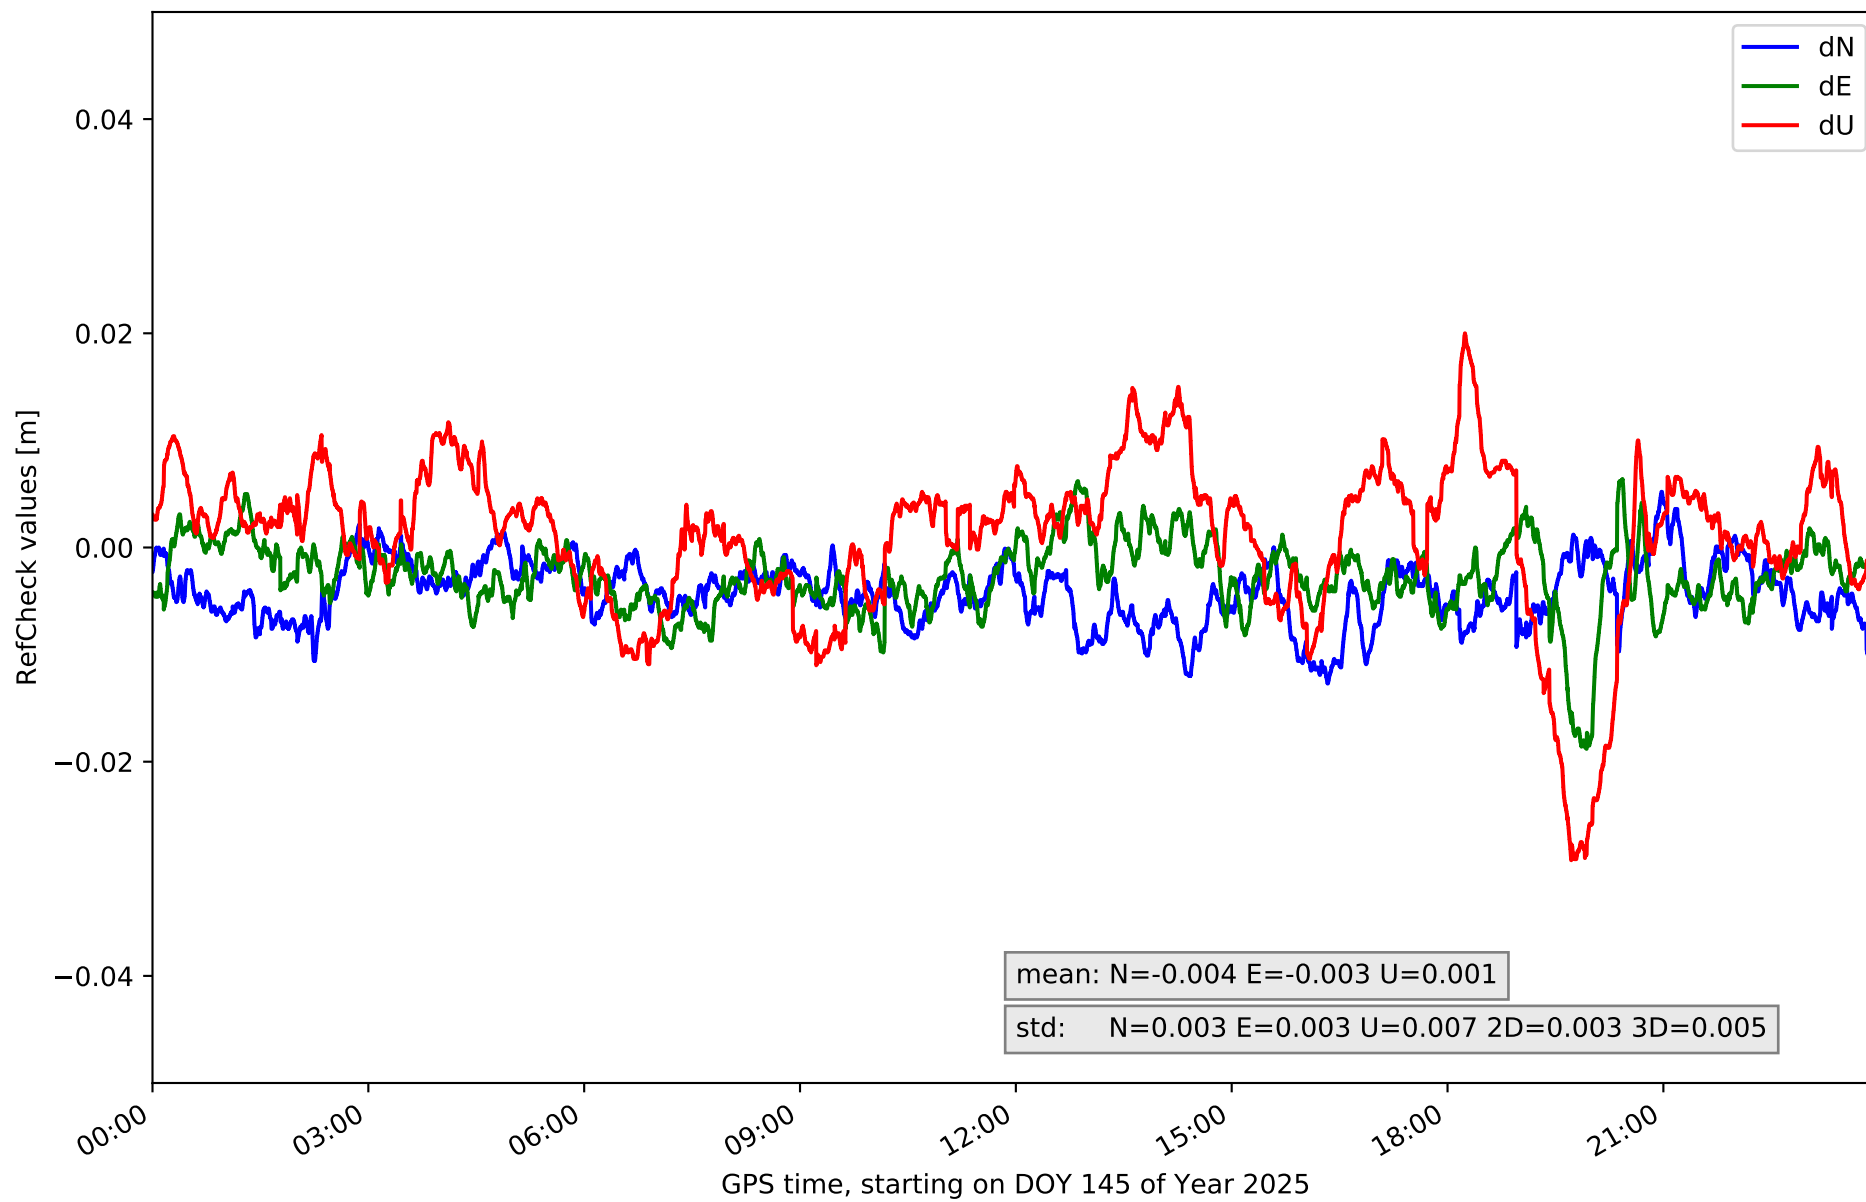

RefCheck values for network N01T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
ARAJ	-0.012	0.004	0.003	-0.016	0.002	0.003	-0.012	0.023	0.006	0.003	0.004	11037	12.8	1940	2.2
BUIT	-0.015	0.016	0.003	-0.002	0.018	0.003	-0.02	0.035	0.012	0.003	0.007	26387	30.6	21550	25.0
IGNE	-0.011	0.005	0.003	-0.011	0.008	0.003	-0.018	0.017	0.007	0.002	0.004	1532	1.8	0	0.0
MAD1	-0.008	0.01	0.002	-0.006	0.006	0.002	-0.024	0.007	0.006	0.002	0.005	0	0.0	2194	2.5
ORUS	-0.01	0.011	0.003	-0.001	0.019	0.003	-0.012	0.012	0.005	0.003	0.003	11897	13.8	120	0.1
SMDV	-0.008	0.015	0.003	-0.009	0.014	0.003	-0.034	0.005	0.008	0.003	0.007	1913	2.2	17869	20.7
TALV	-0.003	0.011	0.002	-0.02	-0.003	0.003	-0.013	0.018	0.006	0.003	0.003	72499	84.0	2331	2.7
YEB1	-0.013	0.005	0.003	-0.019	0.006	0.003	-0.029	0.02	0.007	0.003	0.005	6865	8.0	2636	3.1
Mean	-0.01	0.01	0.003	-0.01	0.009	0.003	-0.02	0.017	0.007	0.003	0.005	16516.2	19.2	6080.0	7.0
Min/Max	-0.015	0.016	0.003	-0.02	0.019	0.003	-0.034	0.035	0.012	0.003	0.007	72499	84.0	21550	25.0

fixing statistic for network N01T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	92.8	94.1	92.0	95.4	86.7
considering satellites with dual-frequency fixed	91.4	92.5	90.0	93.7	84.9
considering all signals separately	91.3	92.6	90.0	93.8	81.3