

summary for network NT11

timeperiod chosen: from 2025-08-10-00:00:00 until 2025-08-10-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 93.7 percent

stations available: 9 of 9


station information:

station ALOR:	antenna: LEIAR25	LEIT	receiver: LEICA GR30	height: 189.527
station CBON:	antenna: LEIAR25	LEIT	receiver: LEICA GR30	height: 57.337
station EIVI:	antenna: LEIAR25	LEIT	receiver: LEICA GR30	height: 132.136
station FORM:	antenna: LEIAR25	LEIT	receiver: LEICA GR30	height: 99.597
station IBIZ:	antenna: TPSCR3_GGD	CONE	receiver: LEICA GR25	height: 59.957
station MALL:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 62.11
station SINE:	antenna: LEIAR25	LEIT	receiver: LEICA GR30	height: 188.036
station SJO1:	antenna: LEIAR25	LEIT	receiver: LEICA GR30	height: 59.879
station TRAU:	antenna: LEIAR25	LEIT	receiver: LEICA GR30	height: 606.096


Processing rate in network NT11

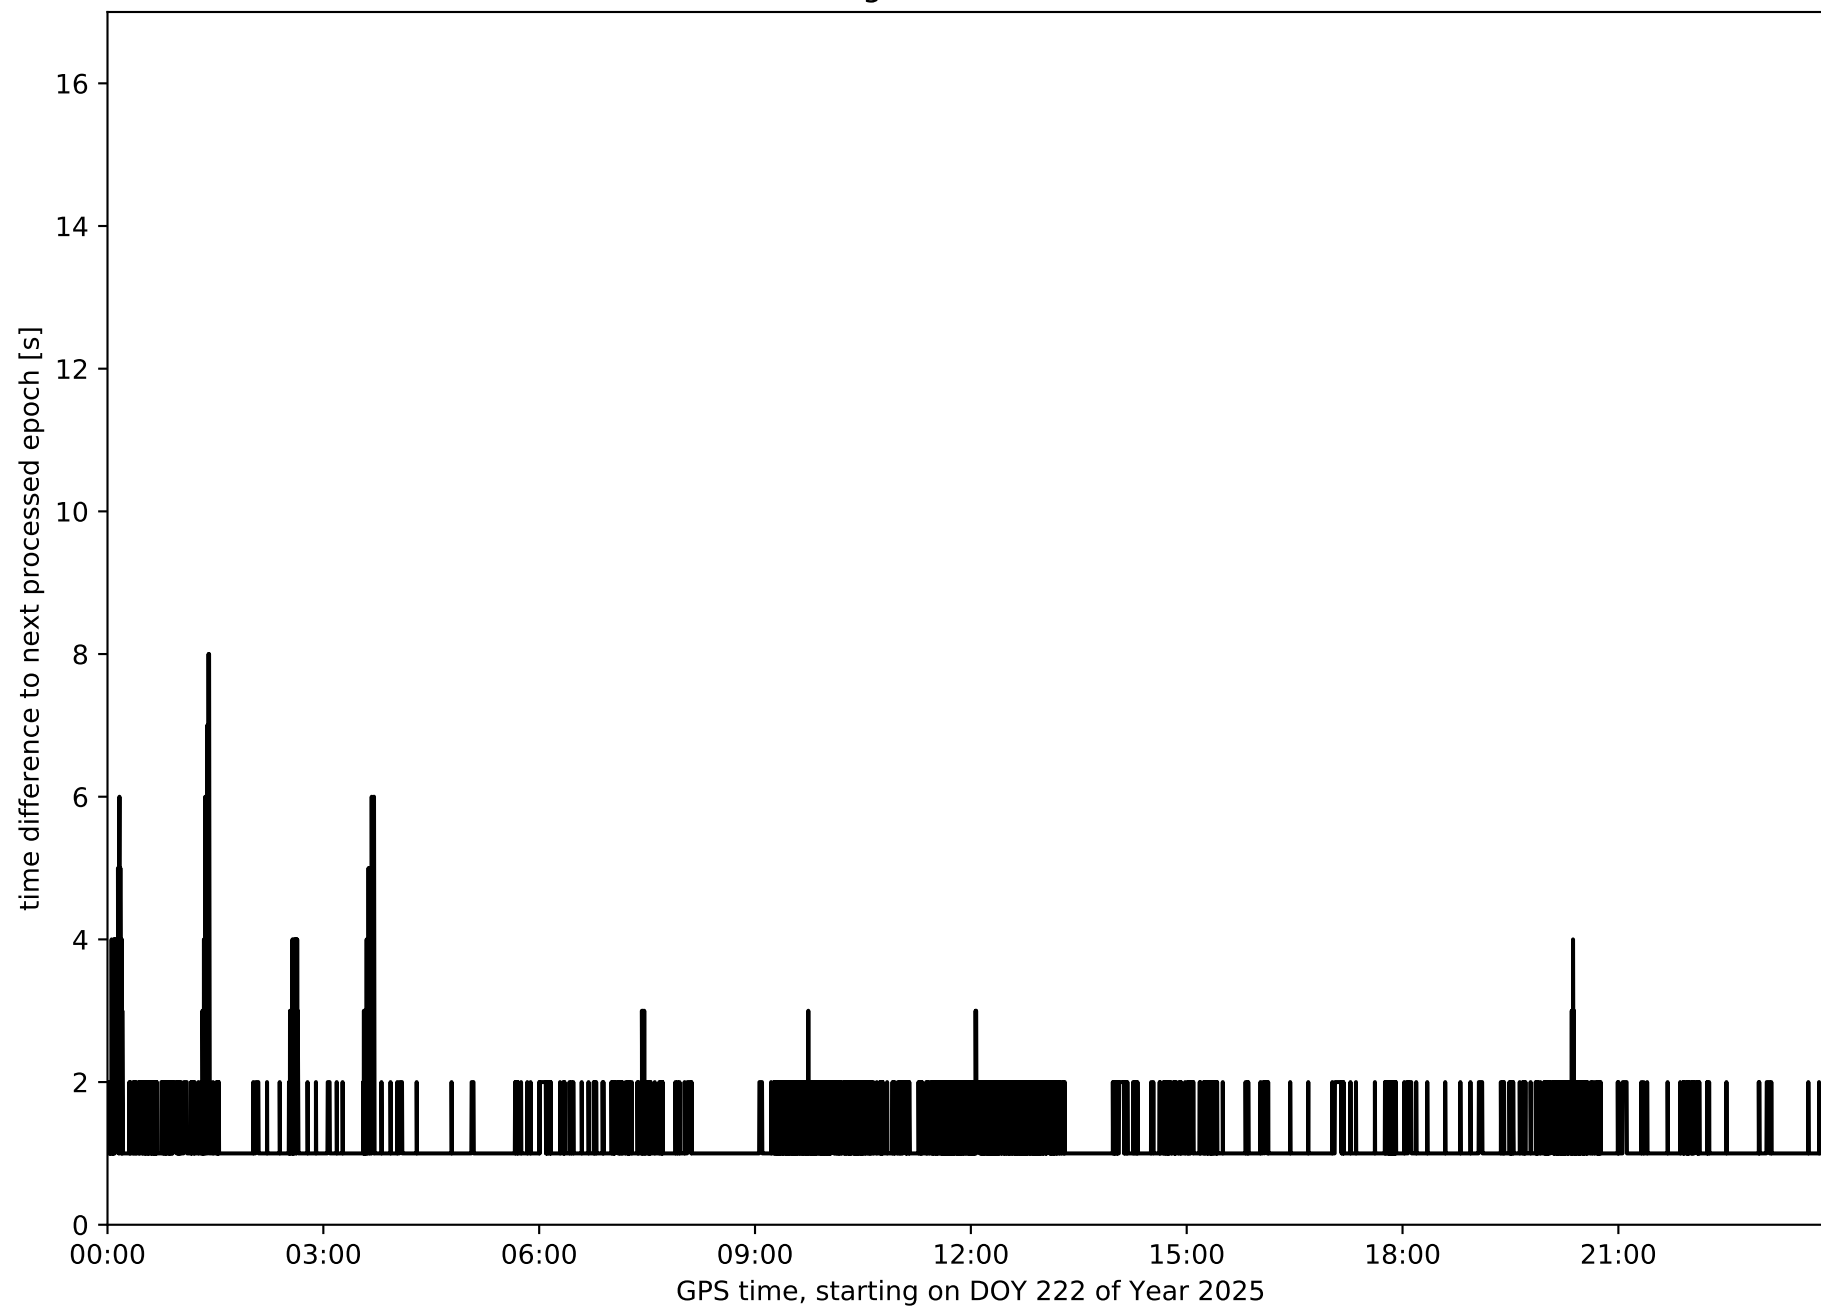


Histogram of the processing rate in network NT11 (durations larger 15 seconds neglected)

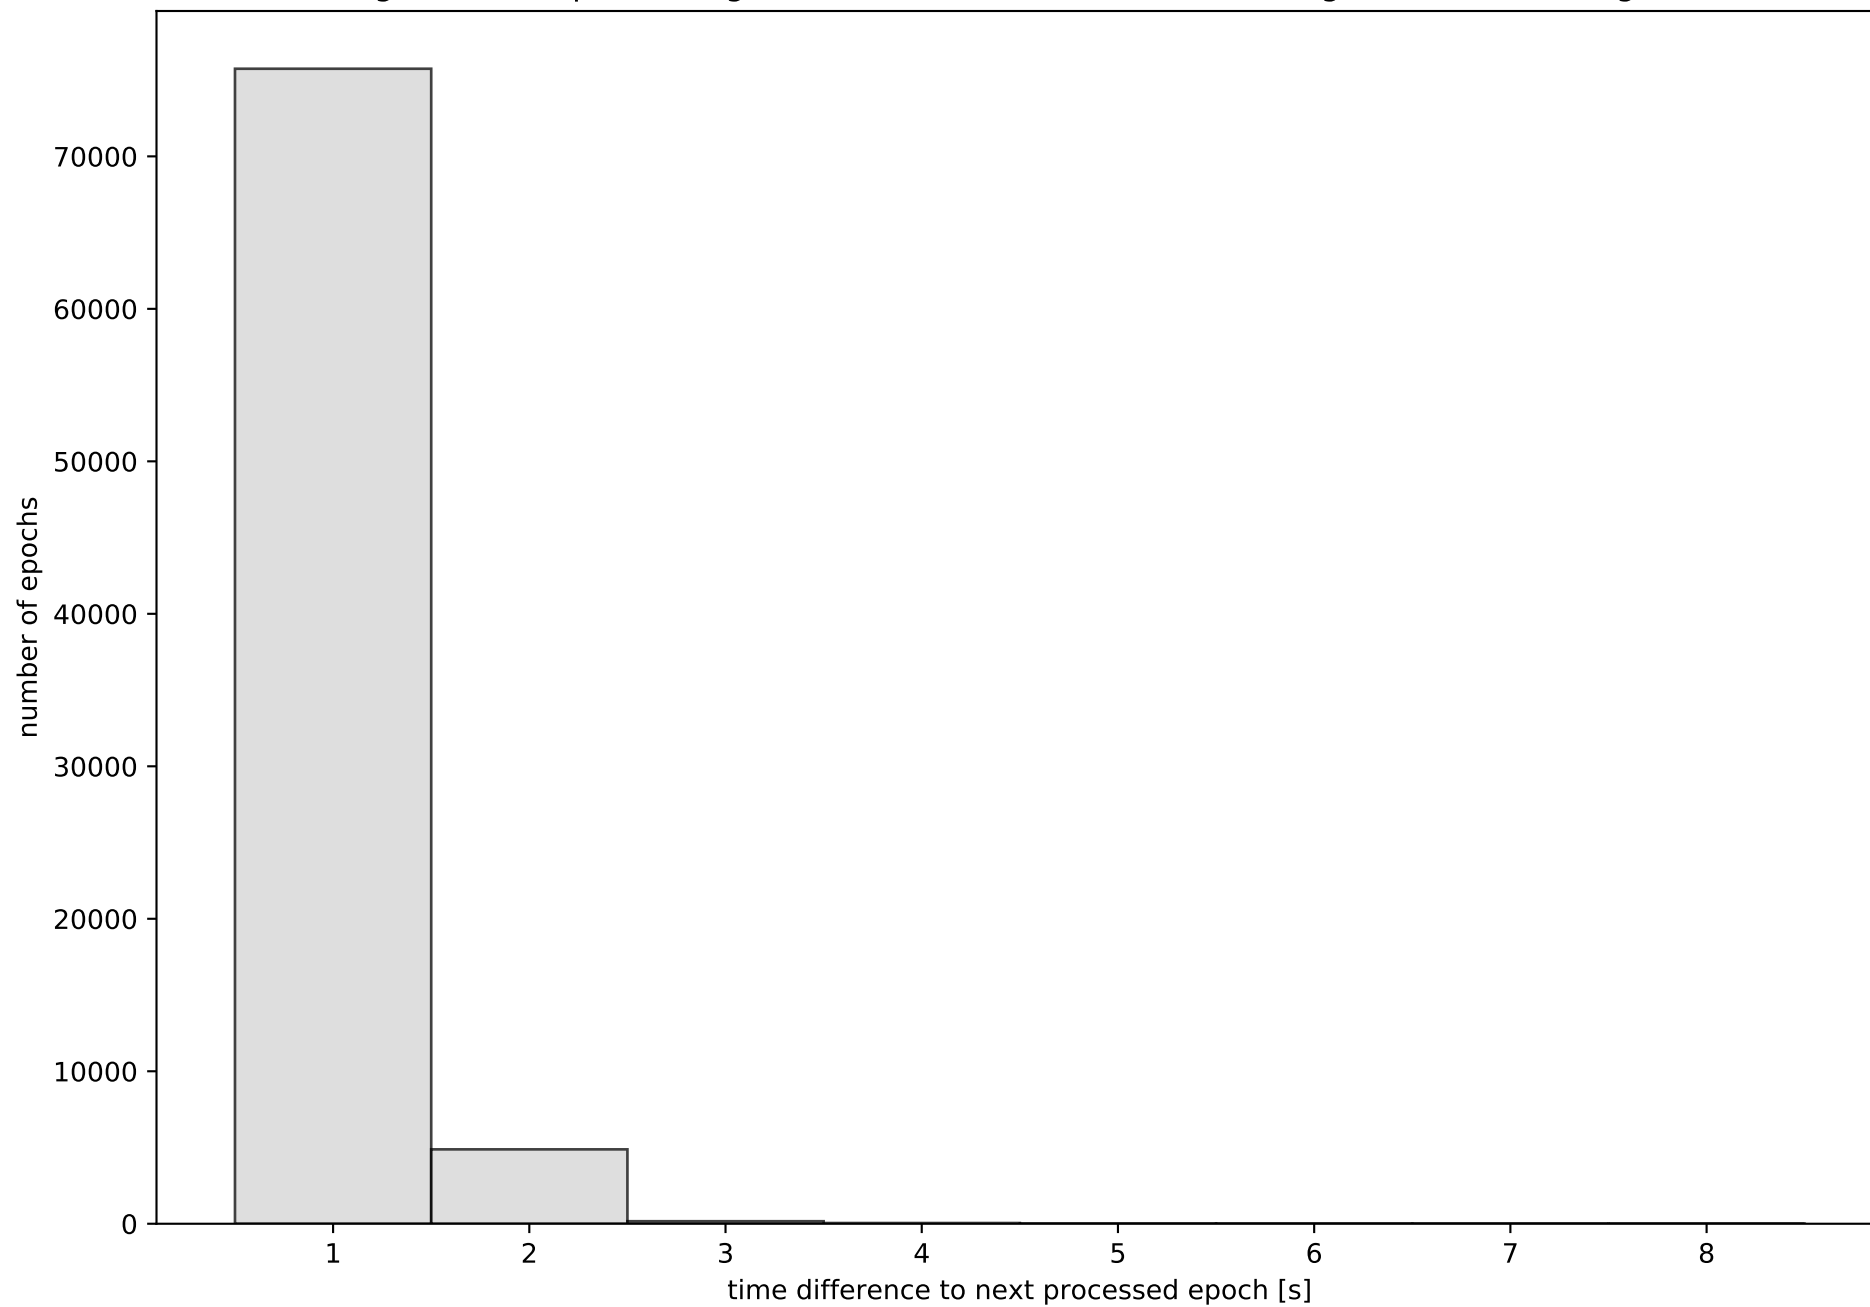


Network NT11 with threshold set to 0.3

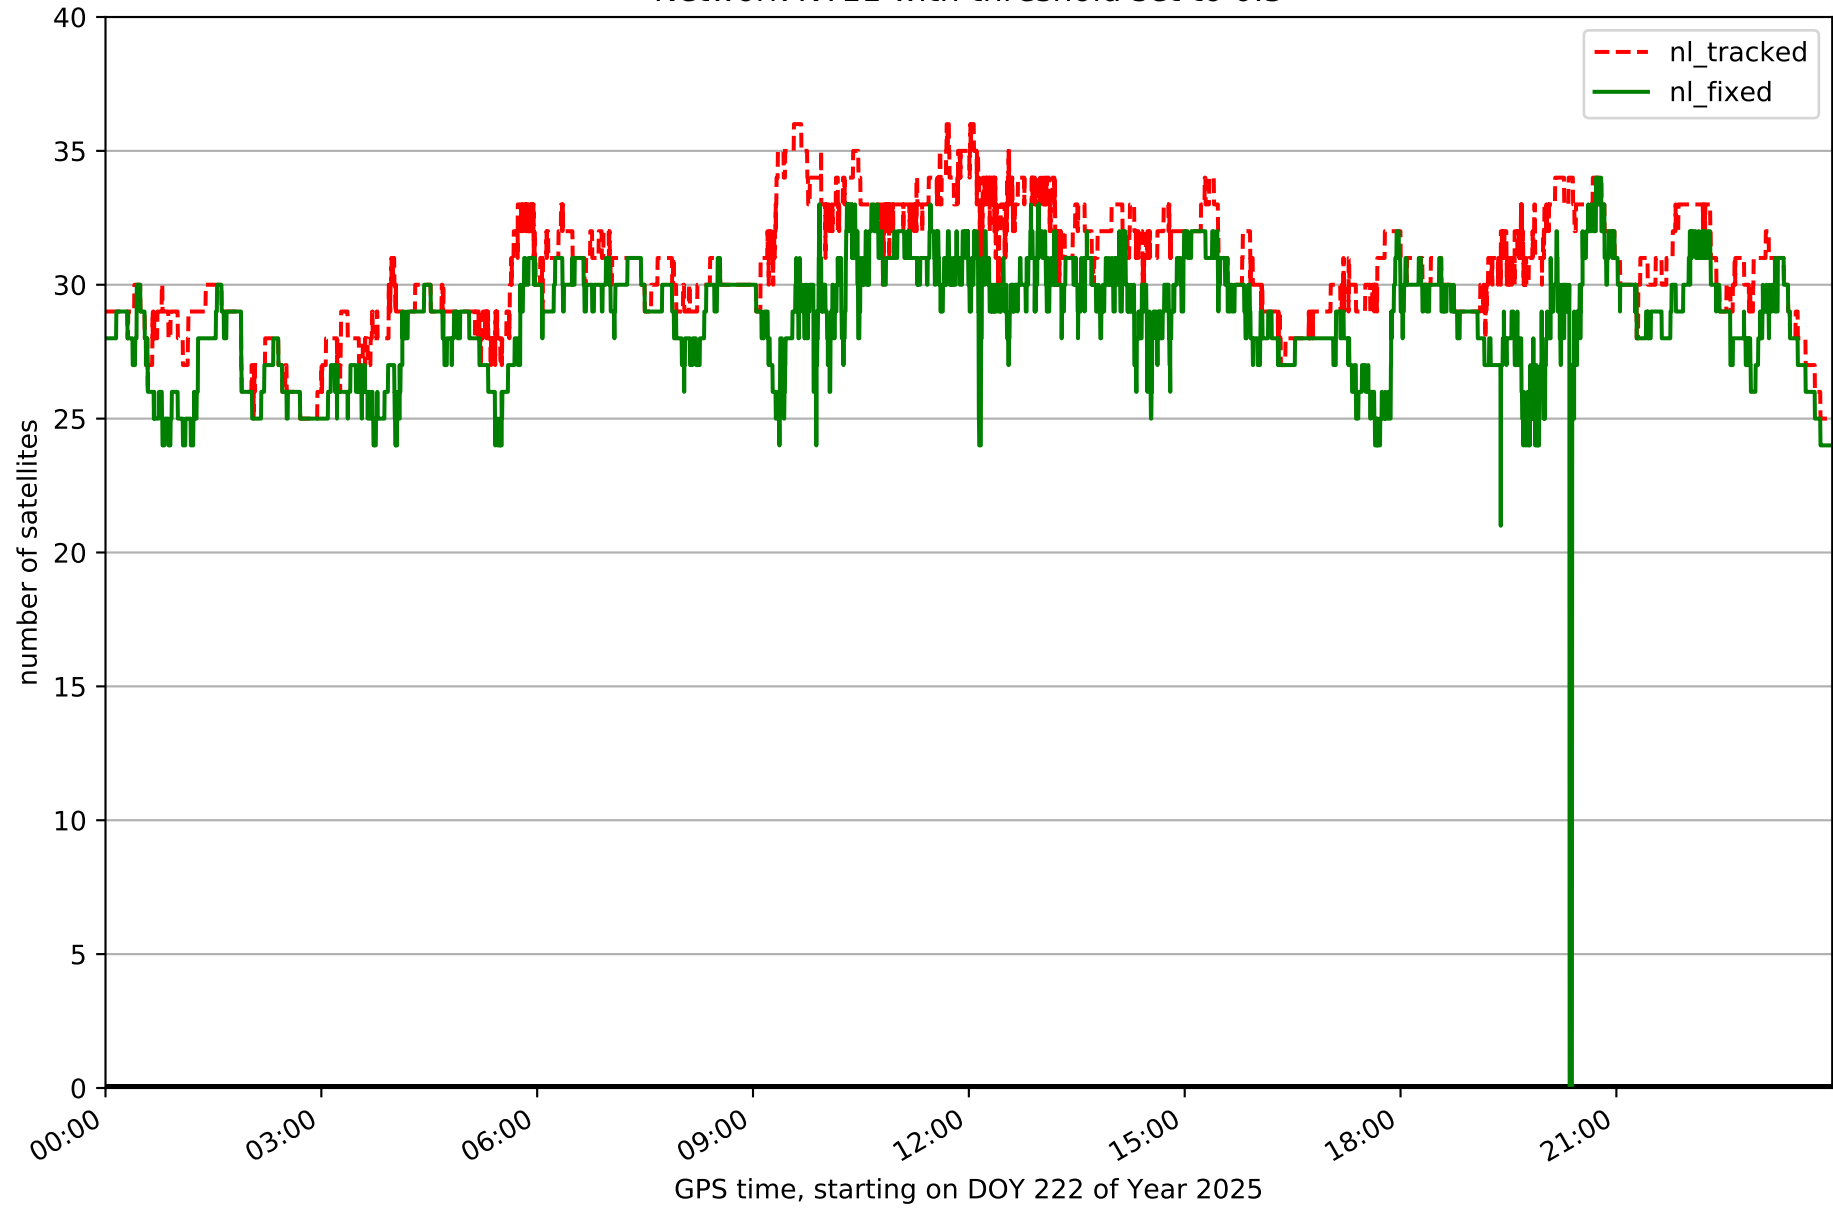


Fixing percentage of satellites in network NT11 with threshold set to 0.3

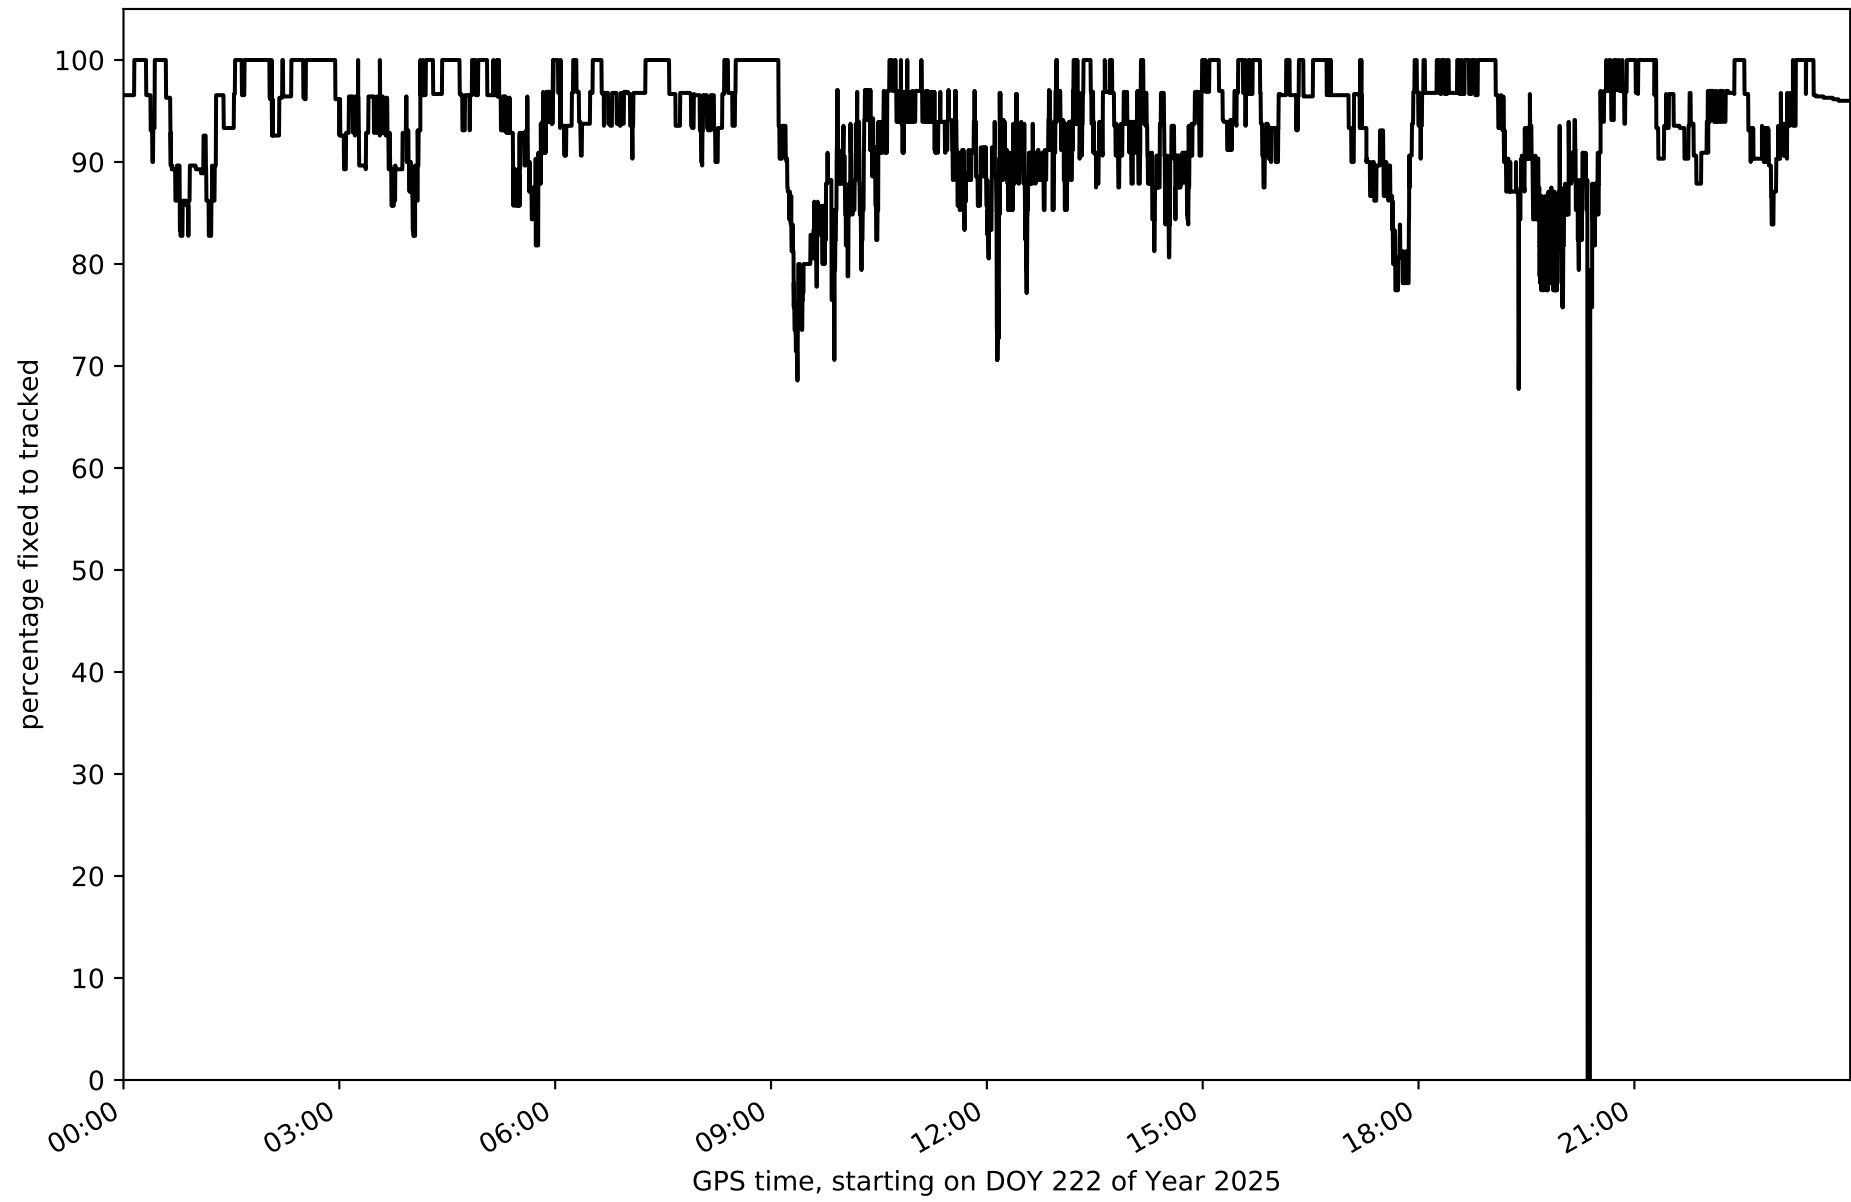


Network NT11 - only GPS with threshold set to 0.3

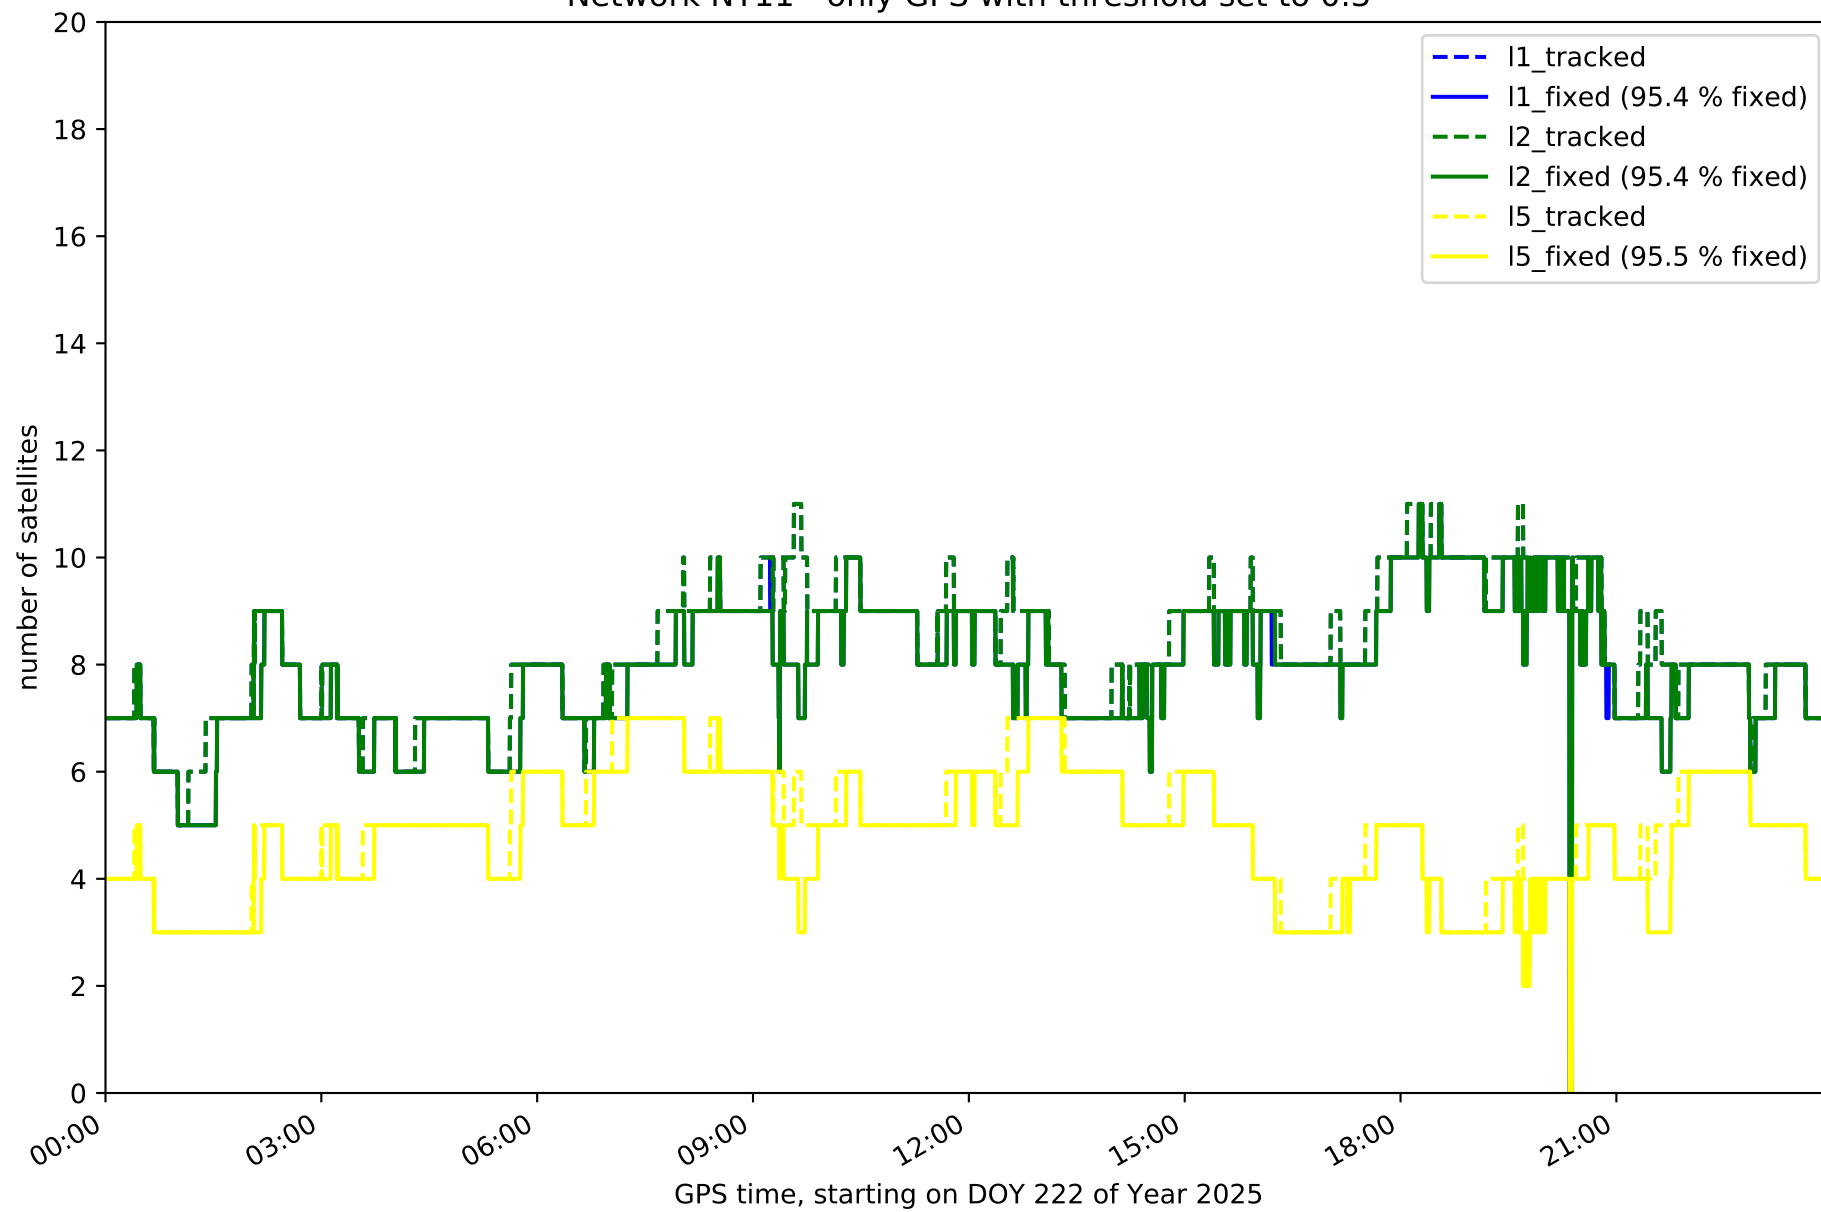


Network NT11 - only GLONASS with threshold set to 0.3

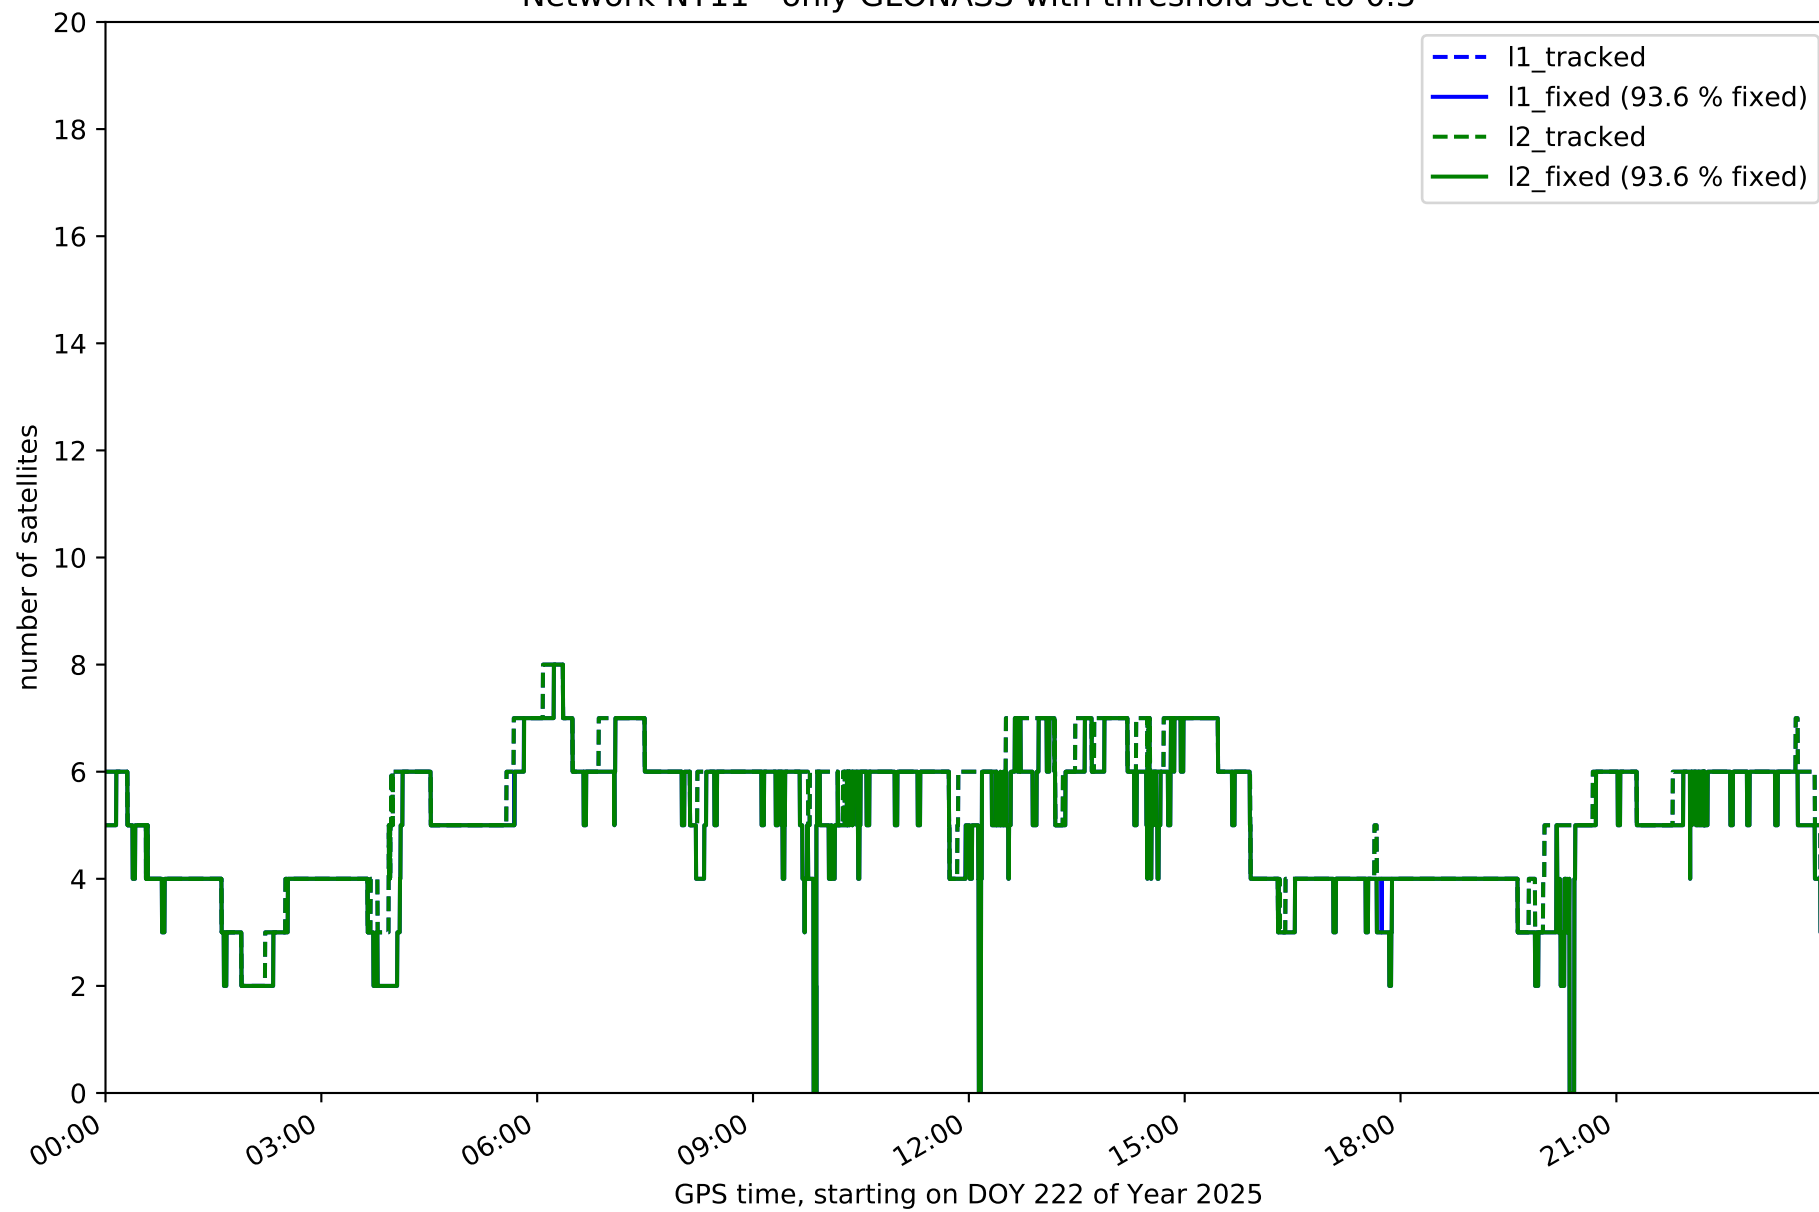


Network NT11 - only BDS with threshold set to 0.3

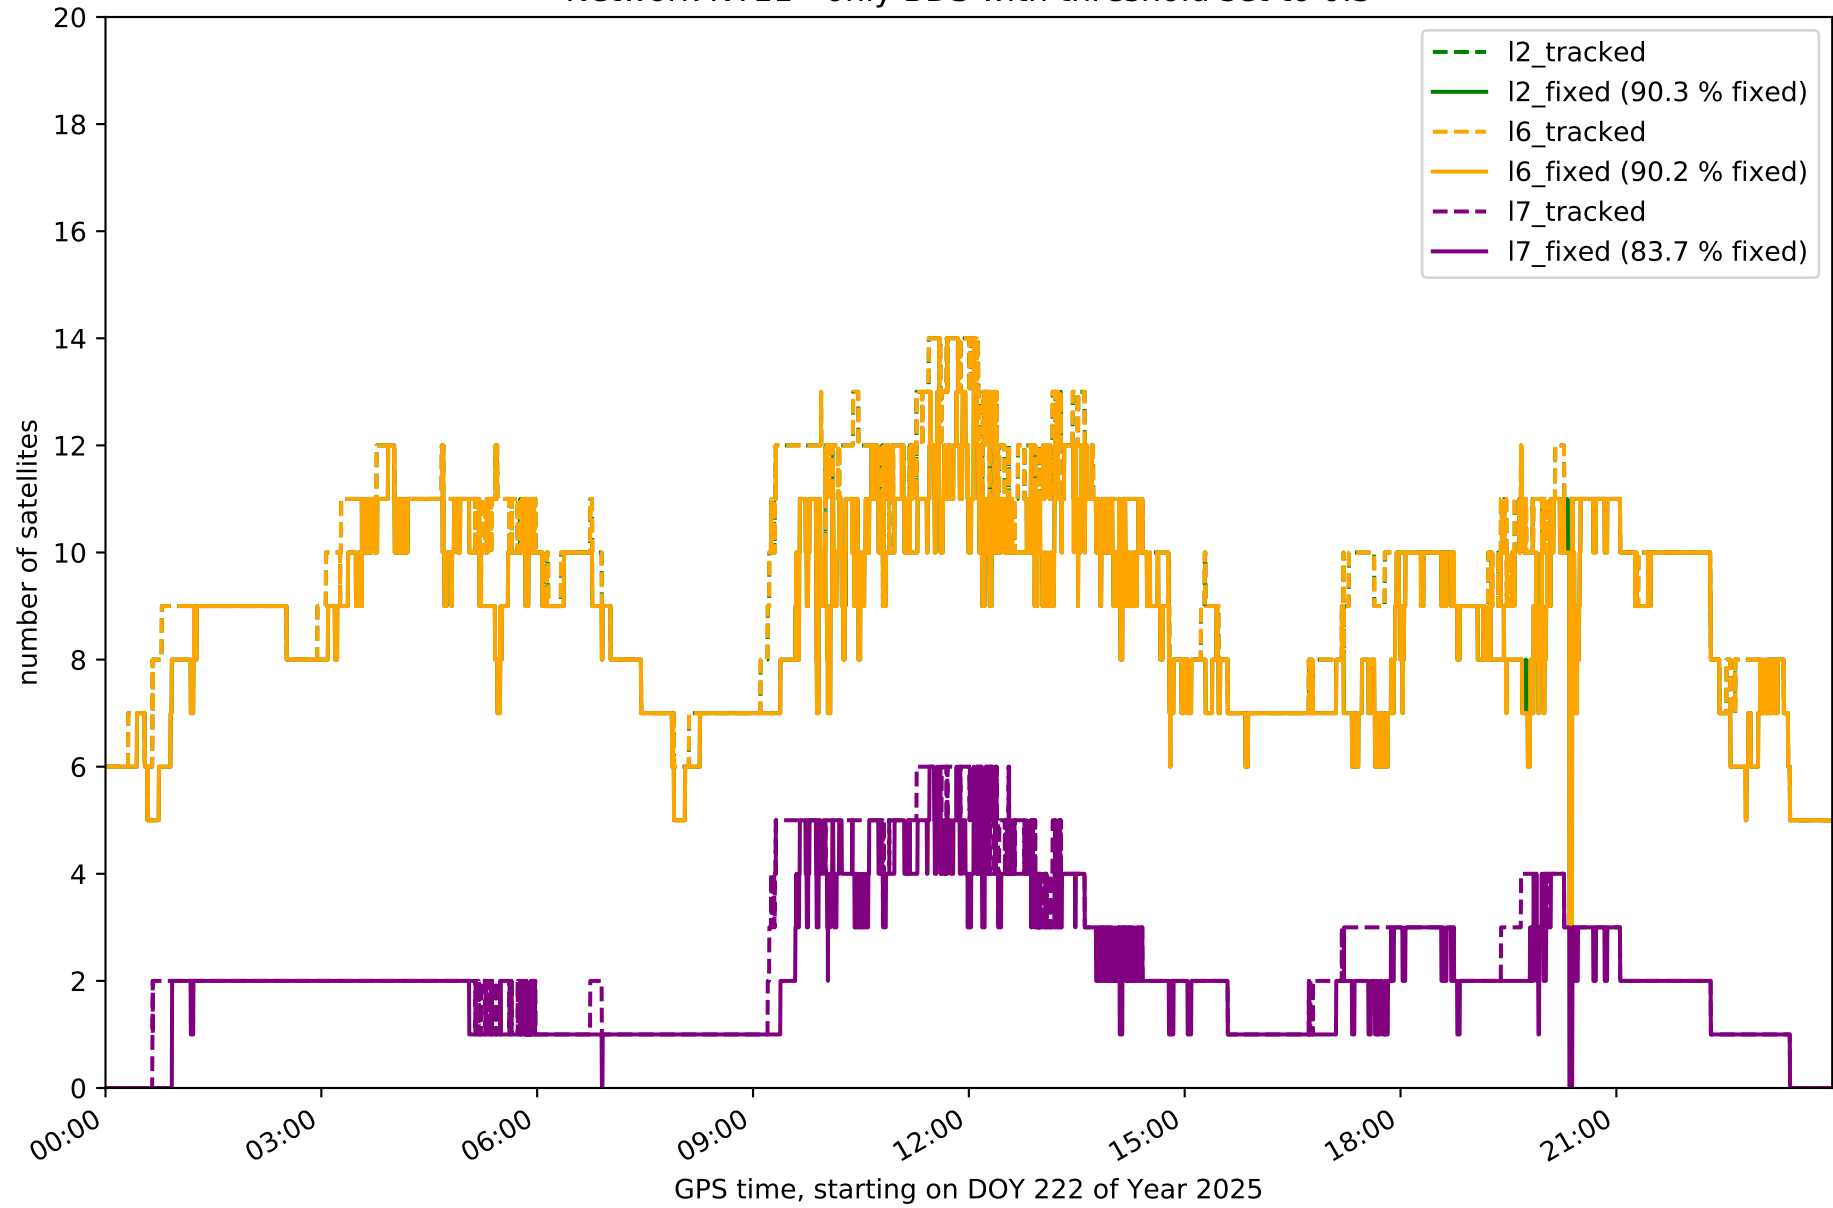


Network NT11 - only Galileo with threshold set to 0.3

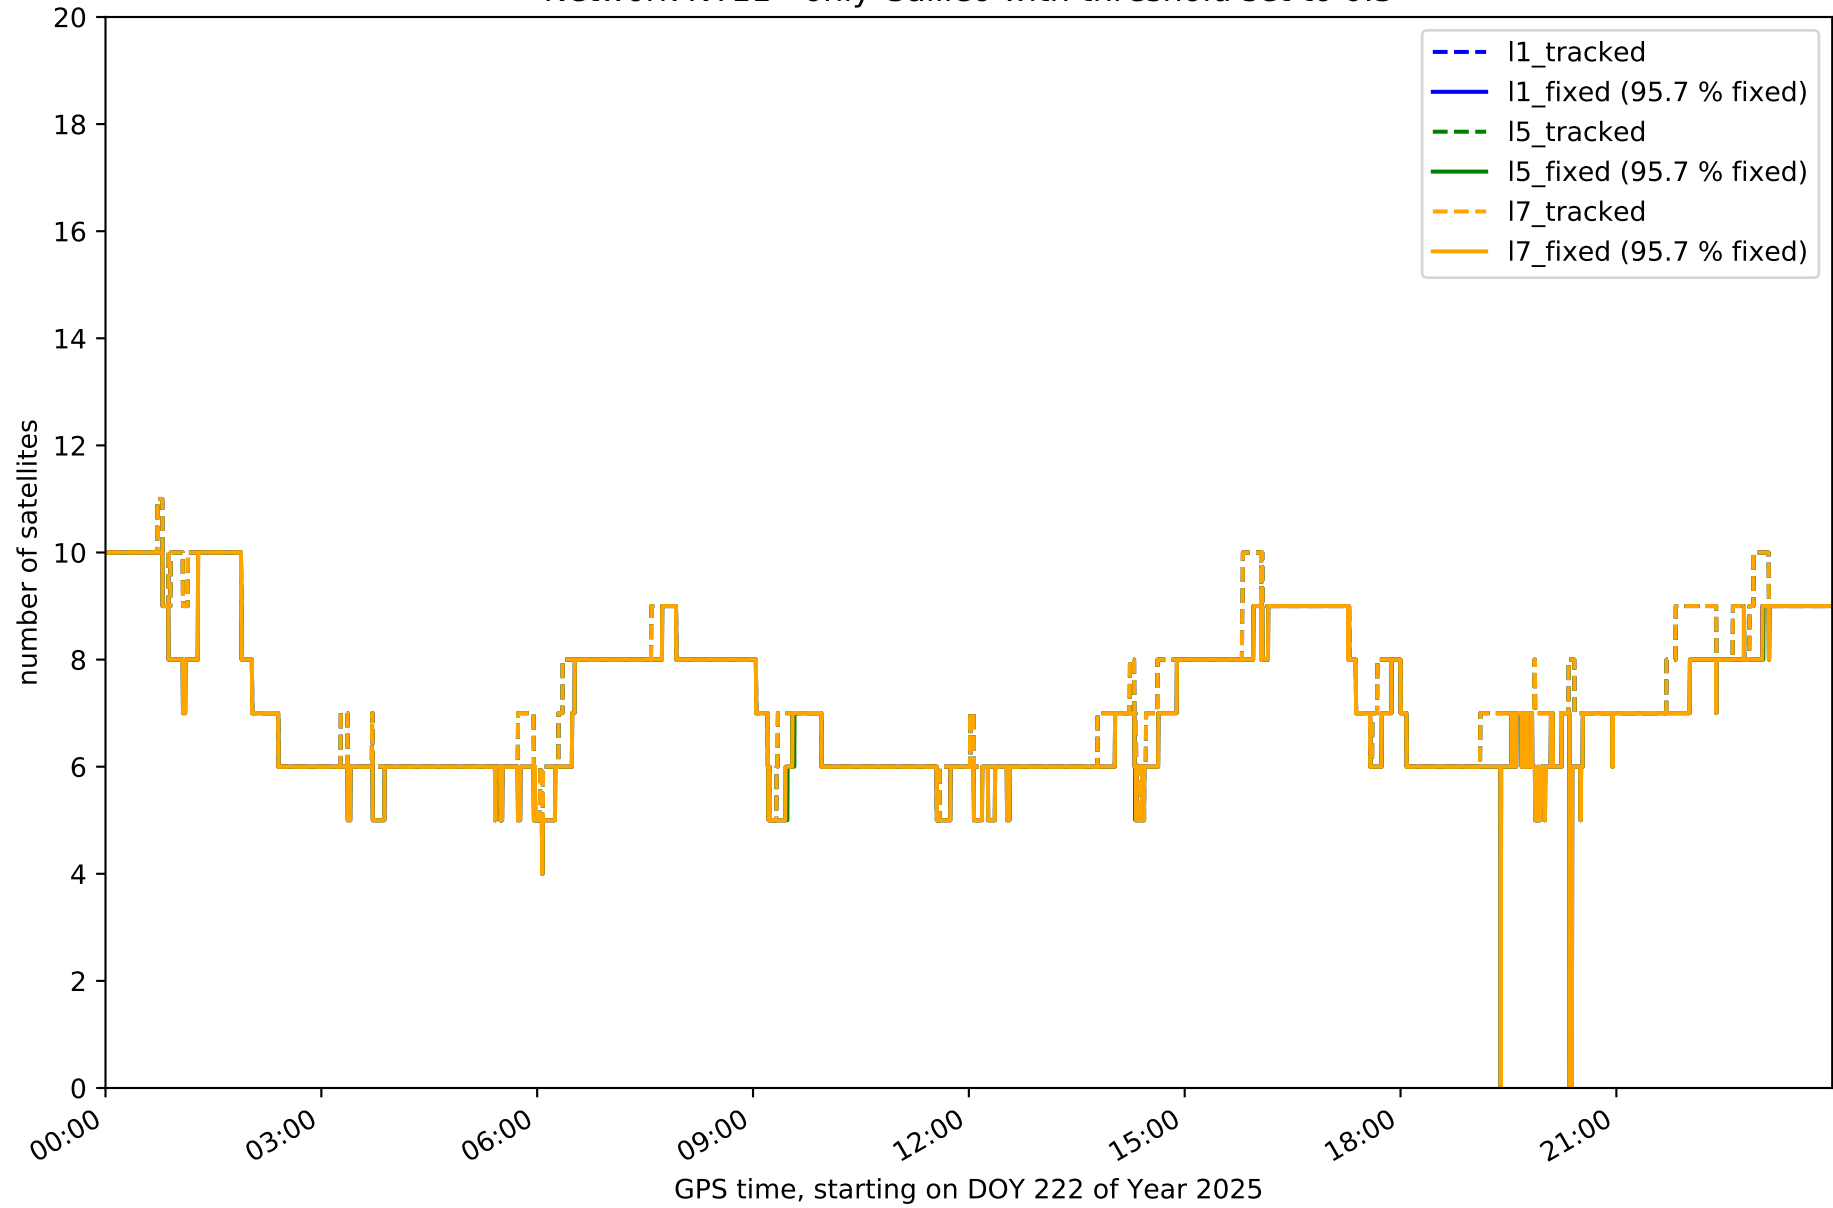


Station ALOR in network NT11

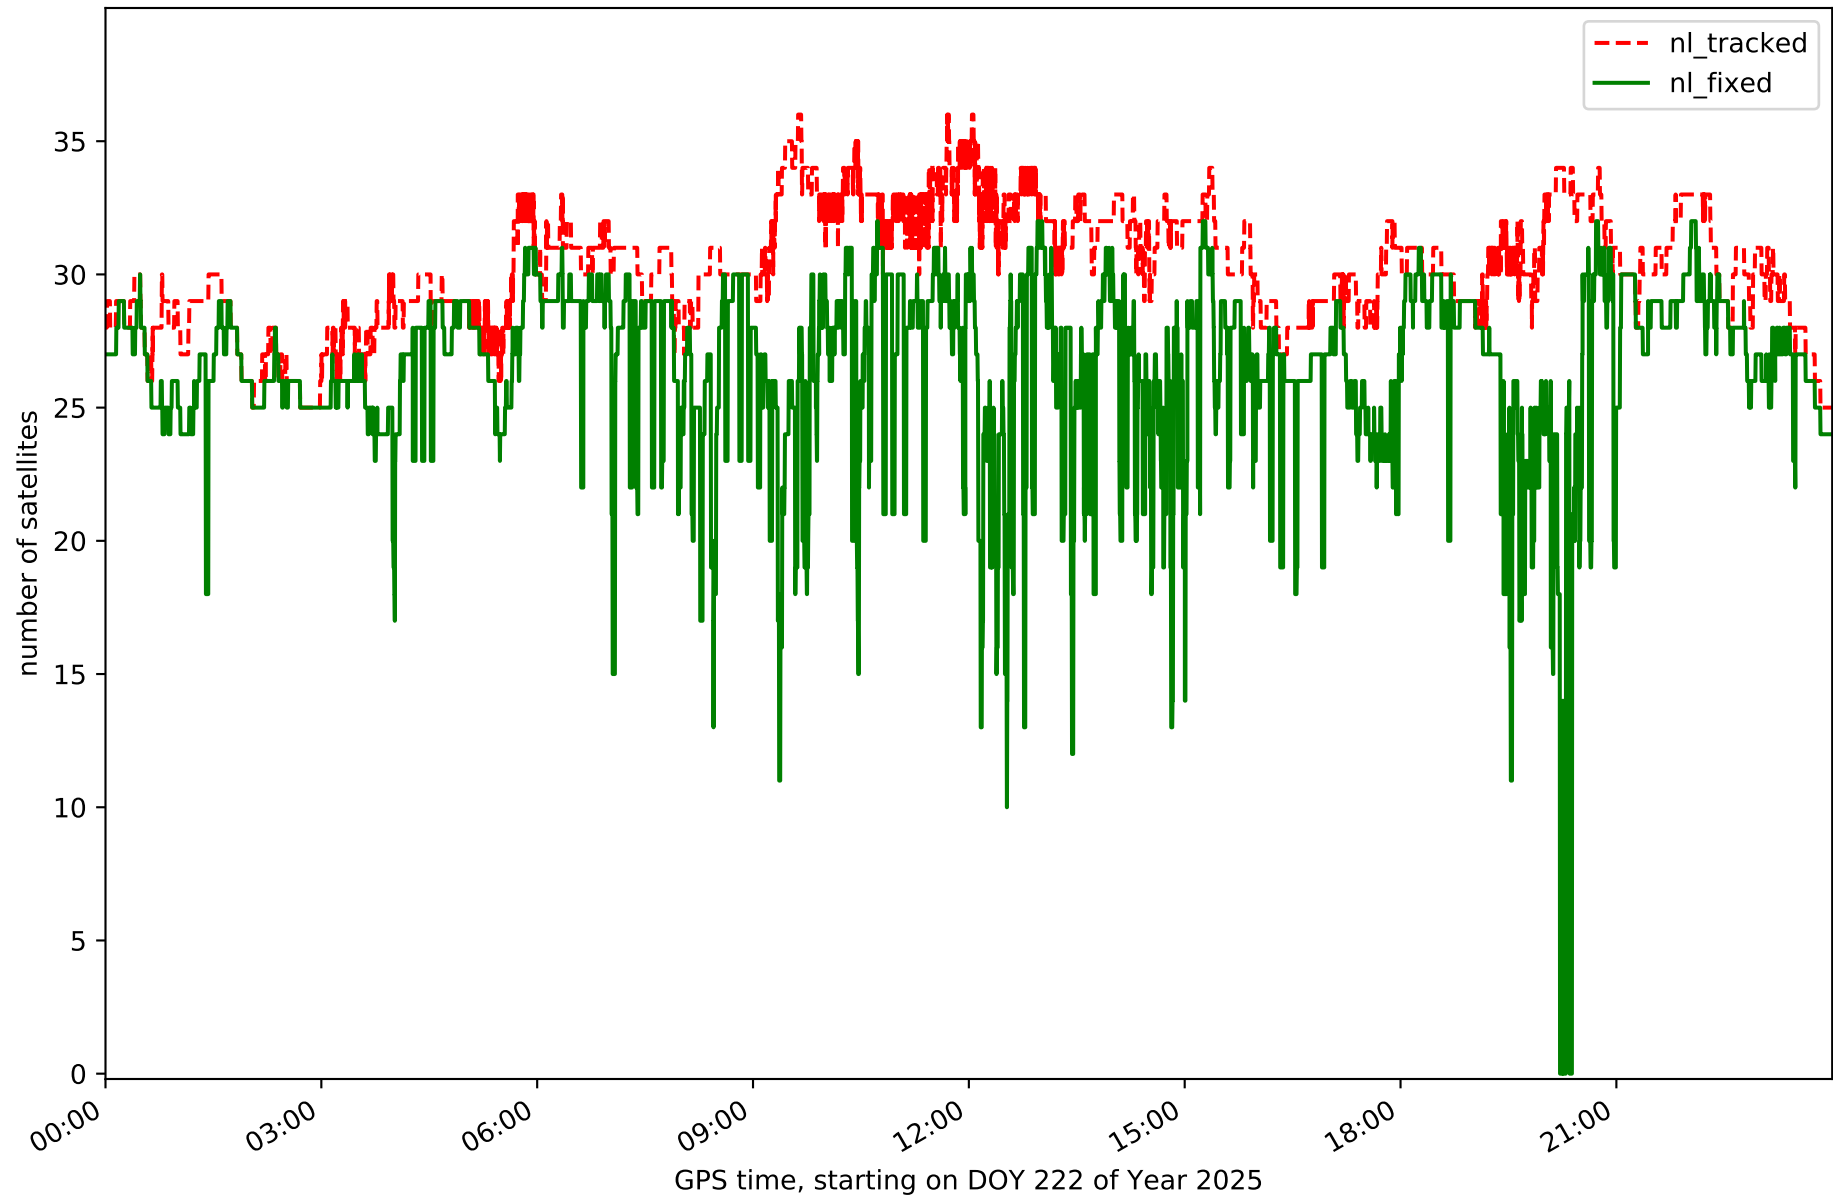


Station CBON in network NT11

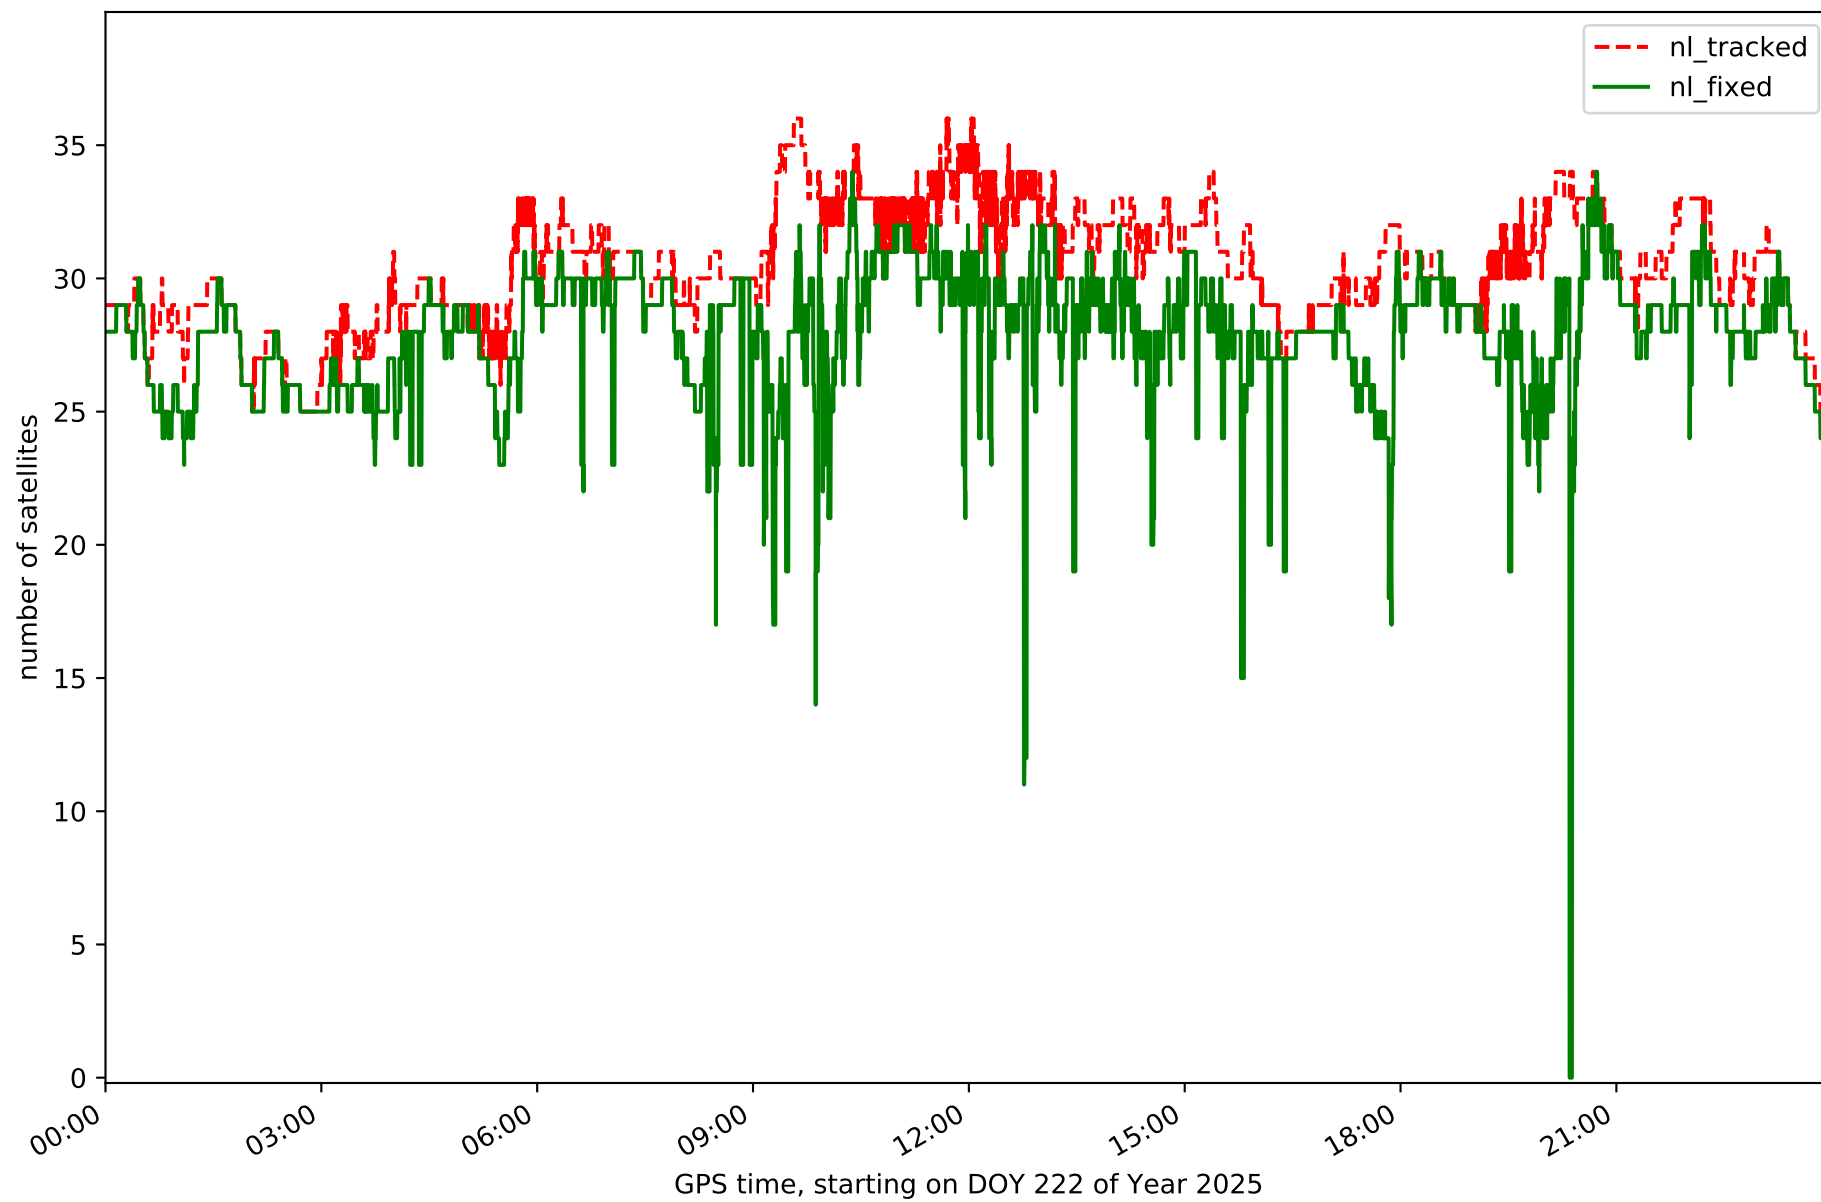


Station EIVI in network NT11

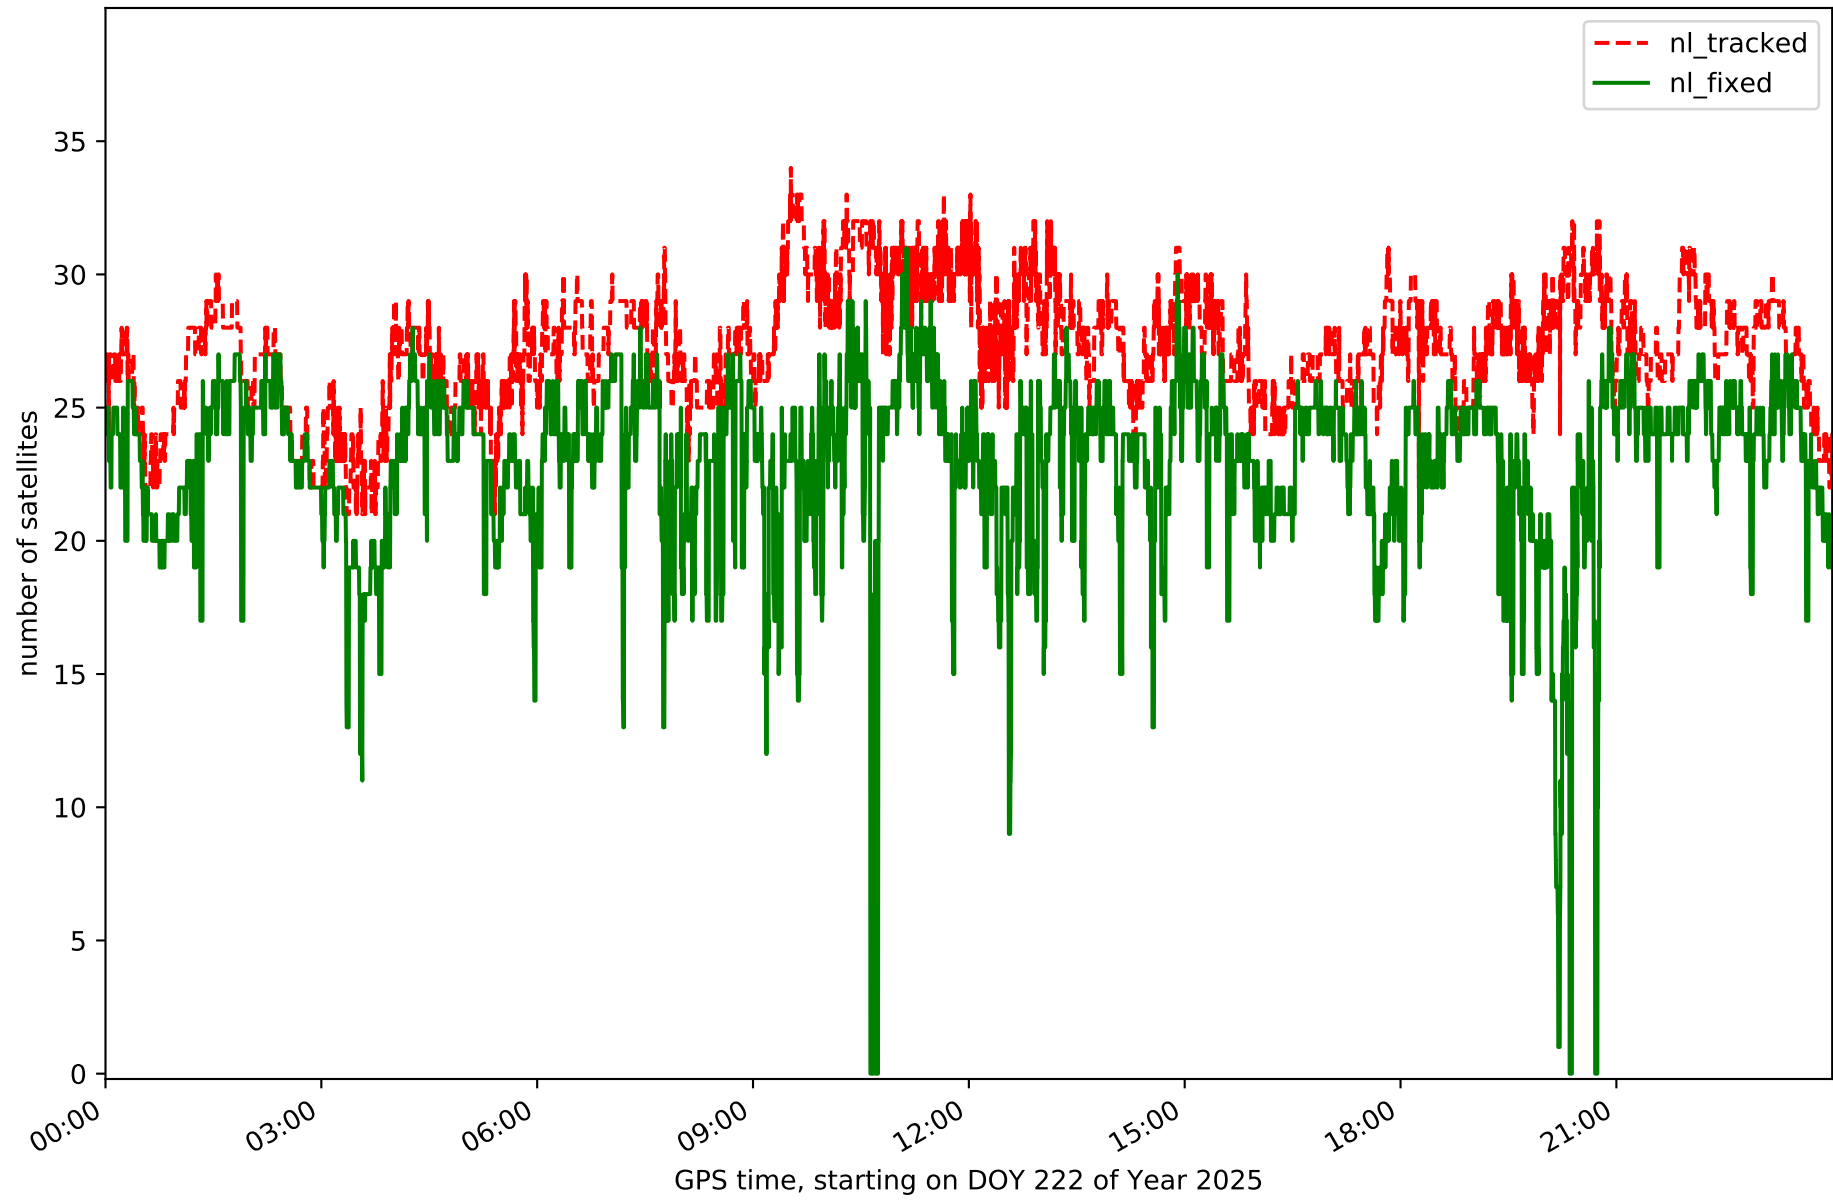


Station FORM in network NT11

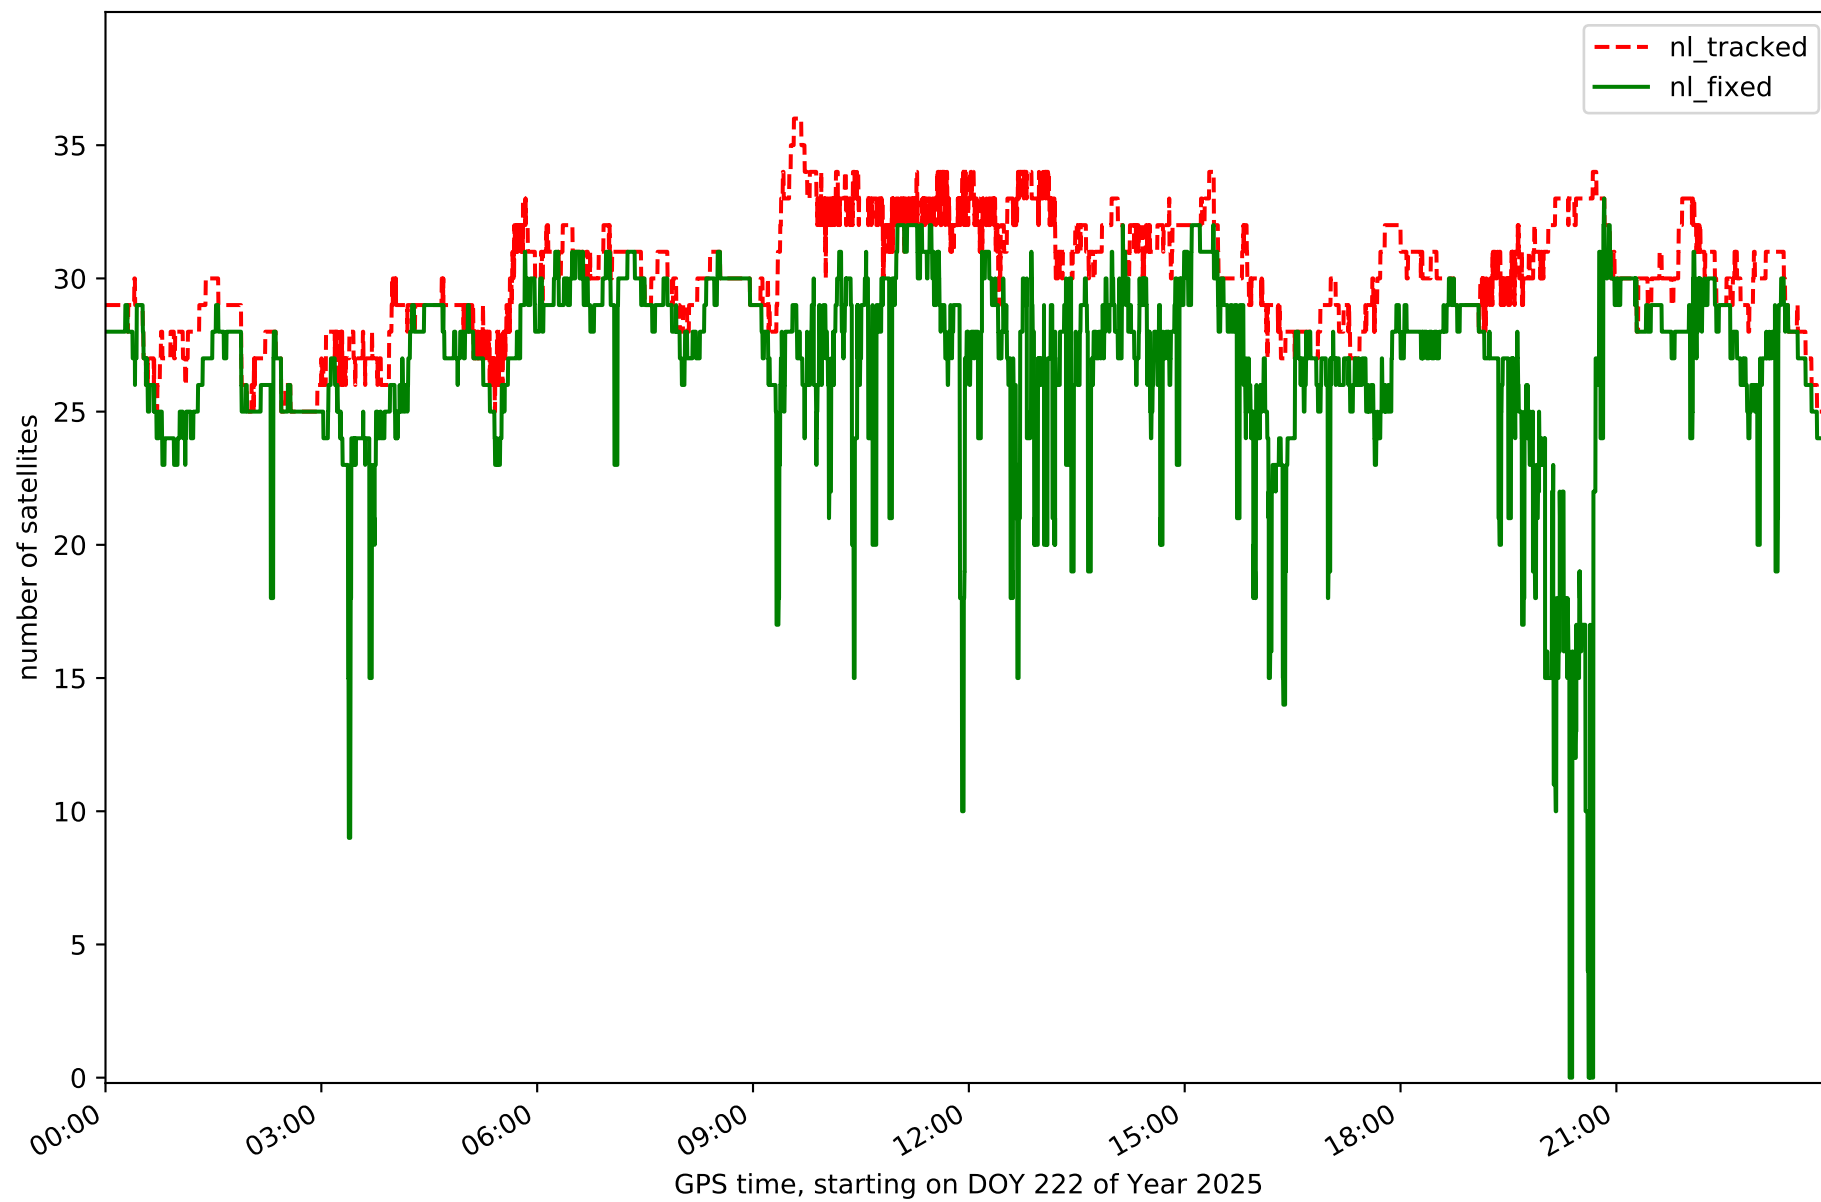


Station IBIZ in network NT11

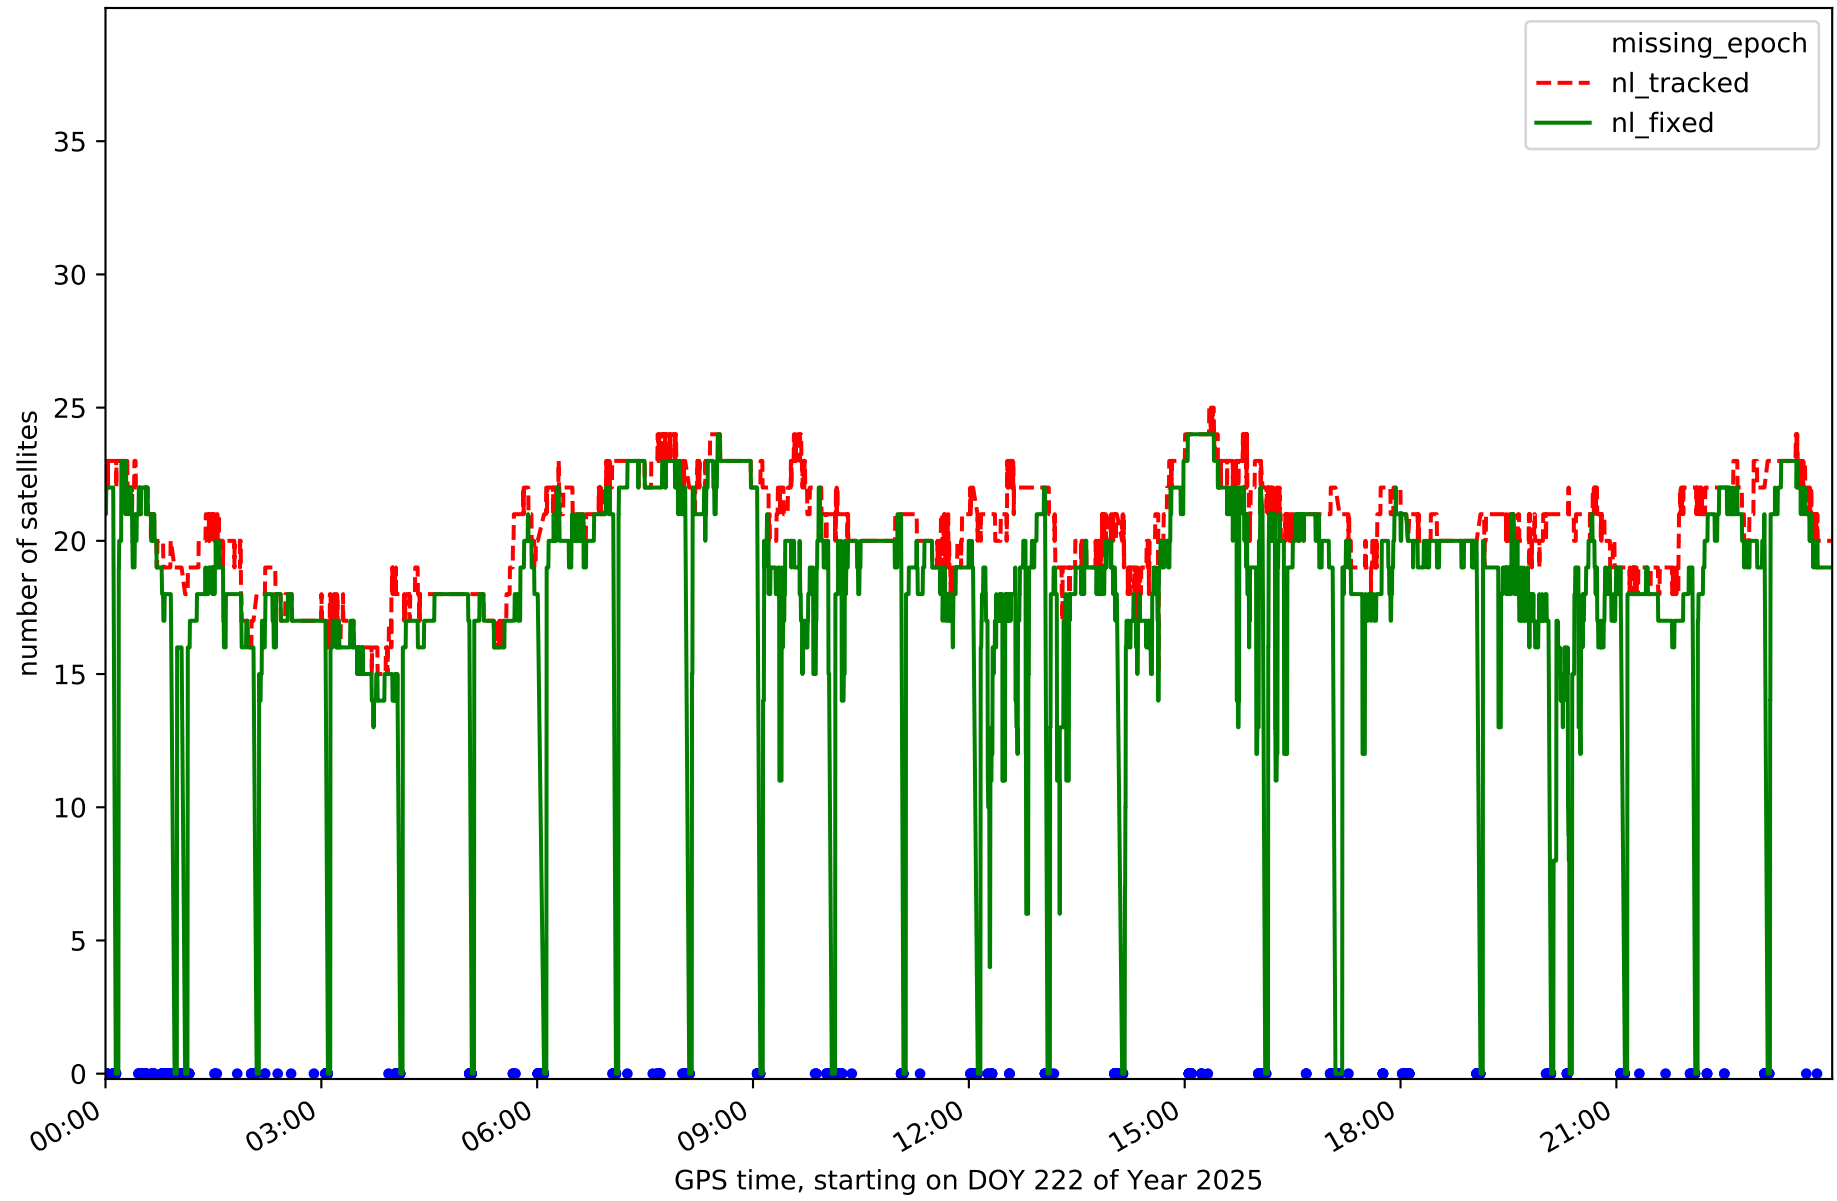


Station MALL in network NT11

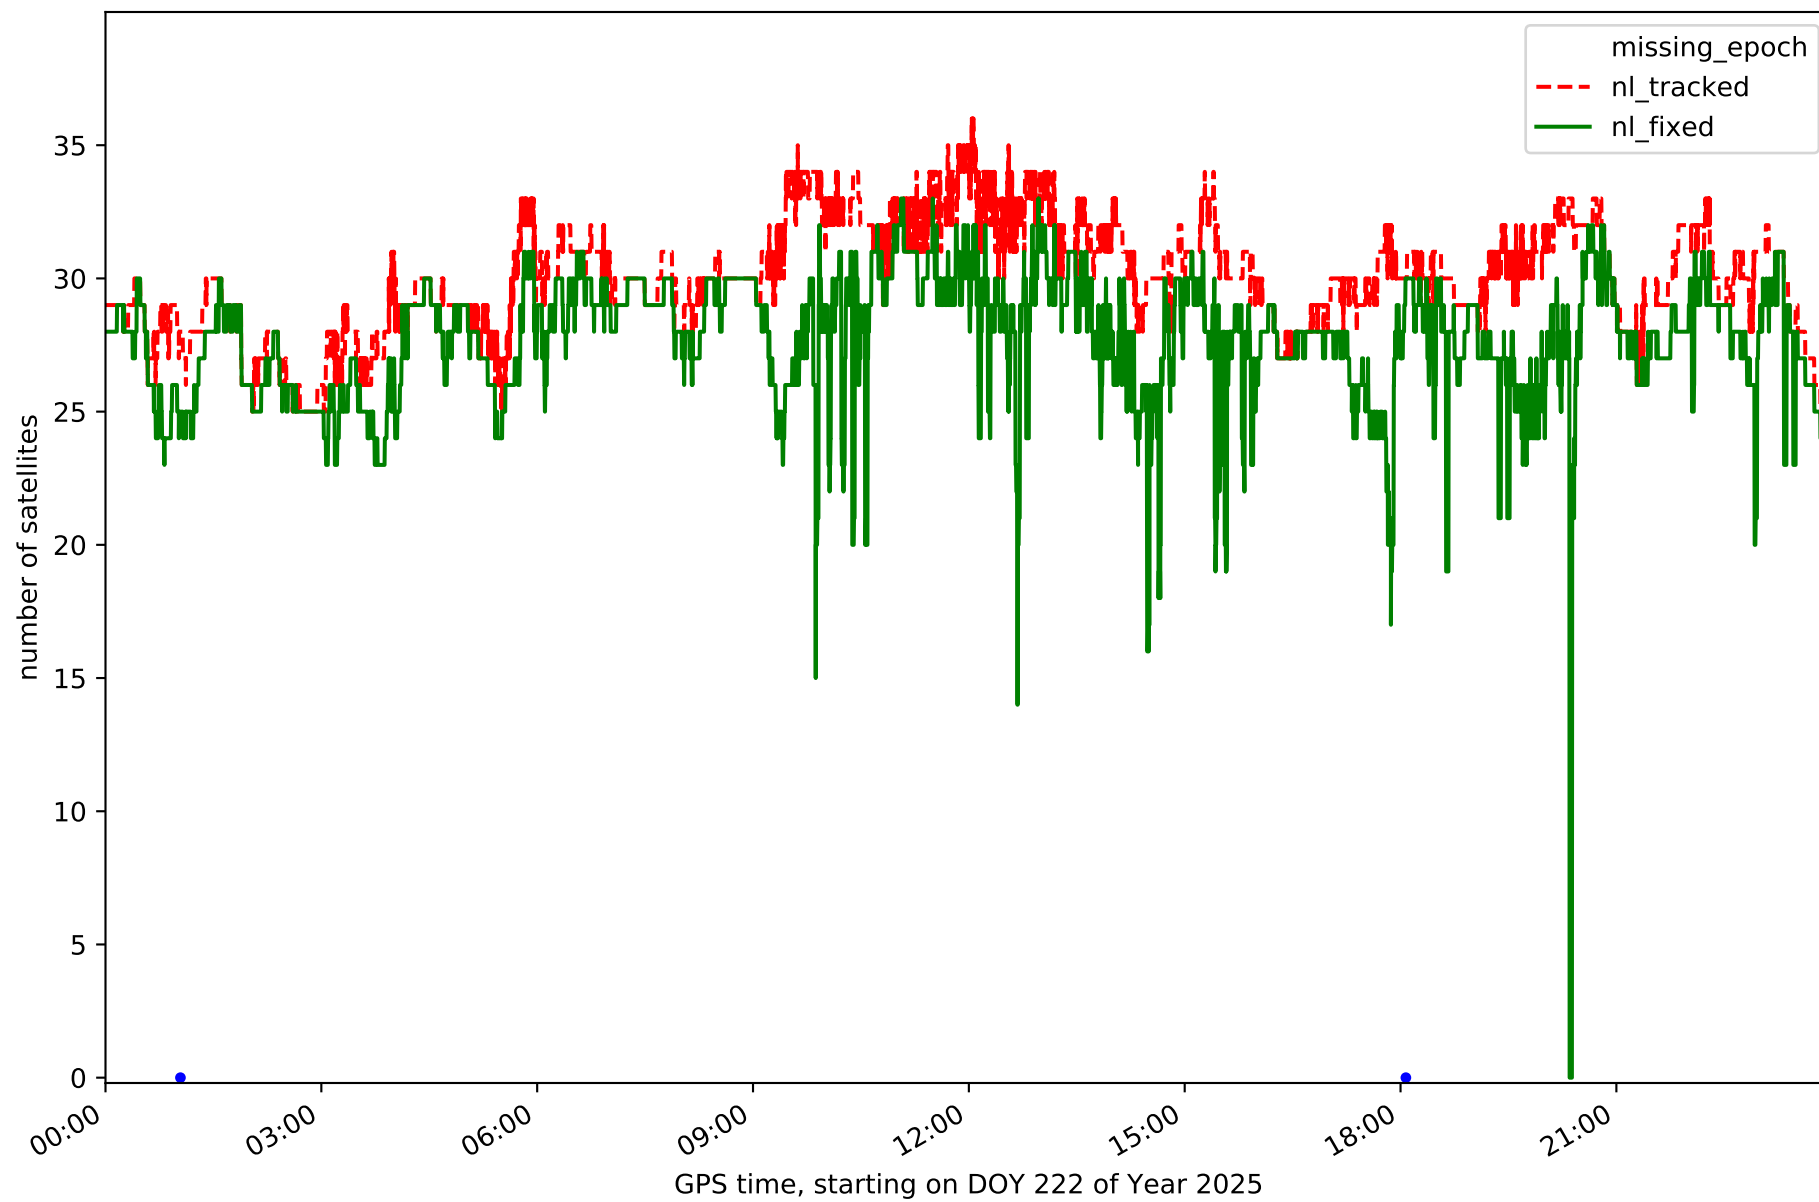


Station SINE in network NT11

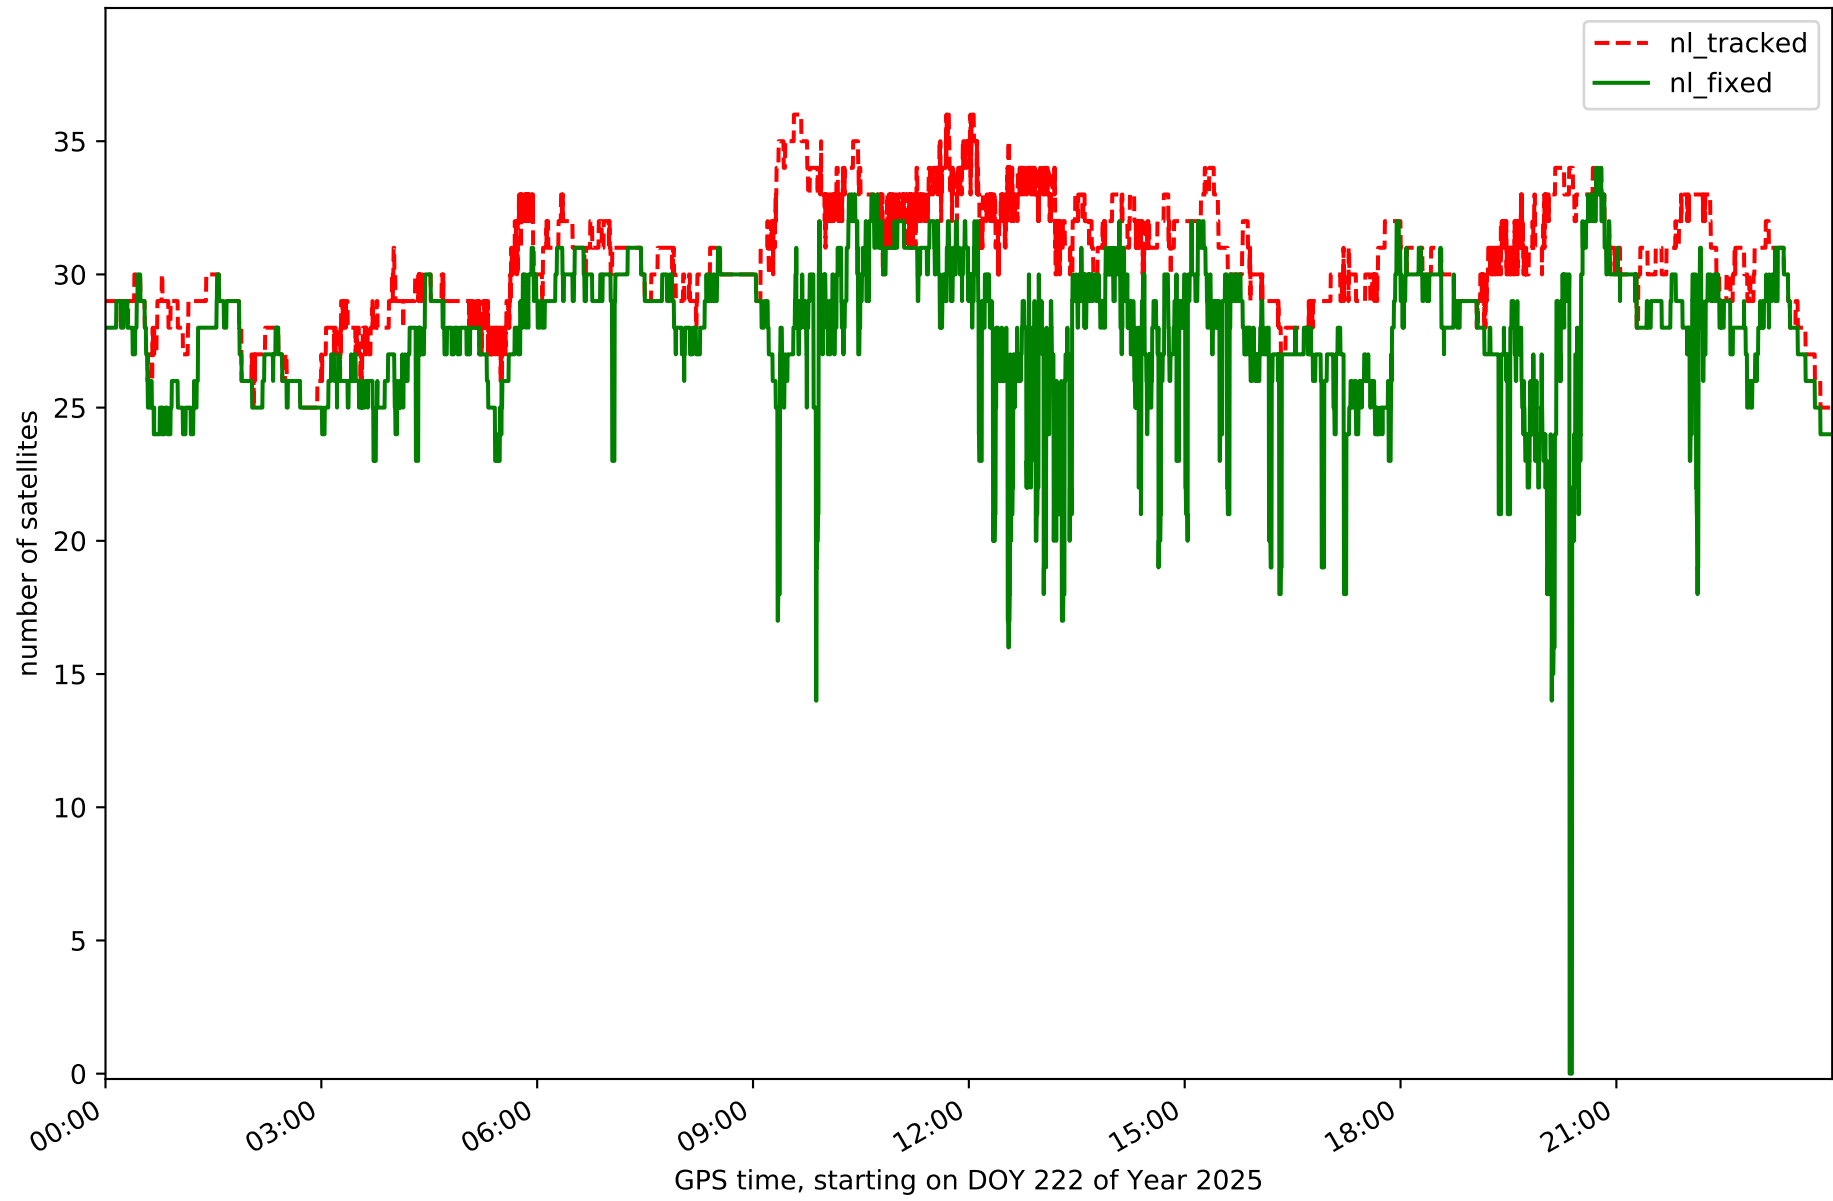


Station SJO1 in network NT11

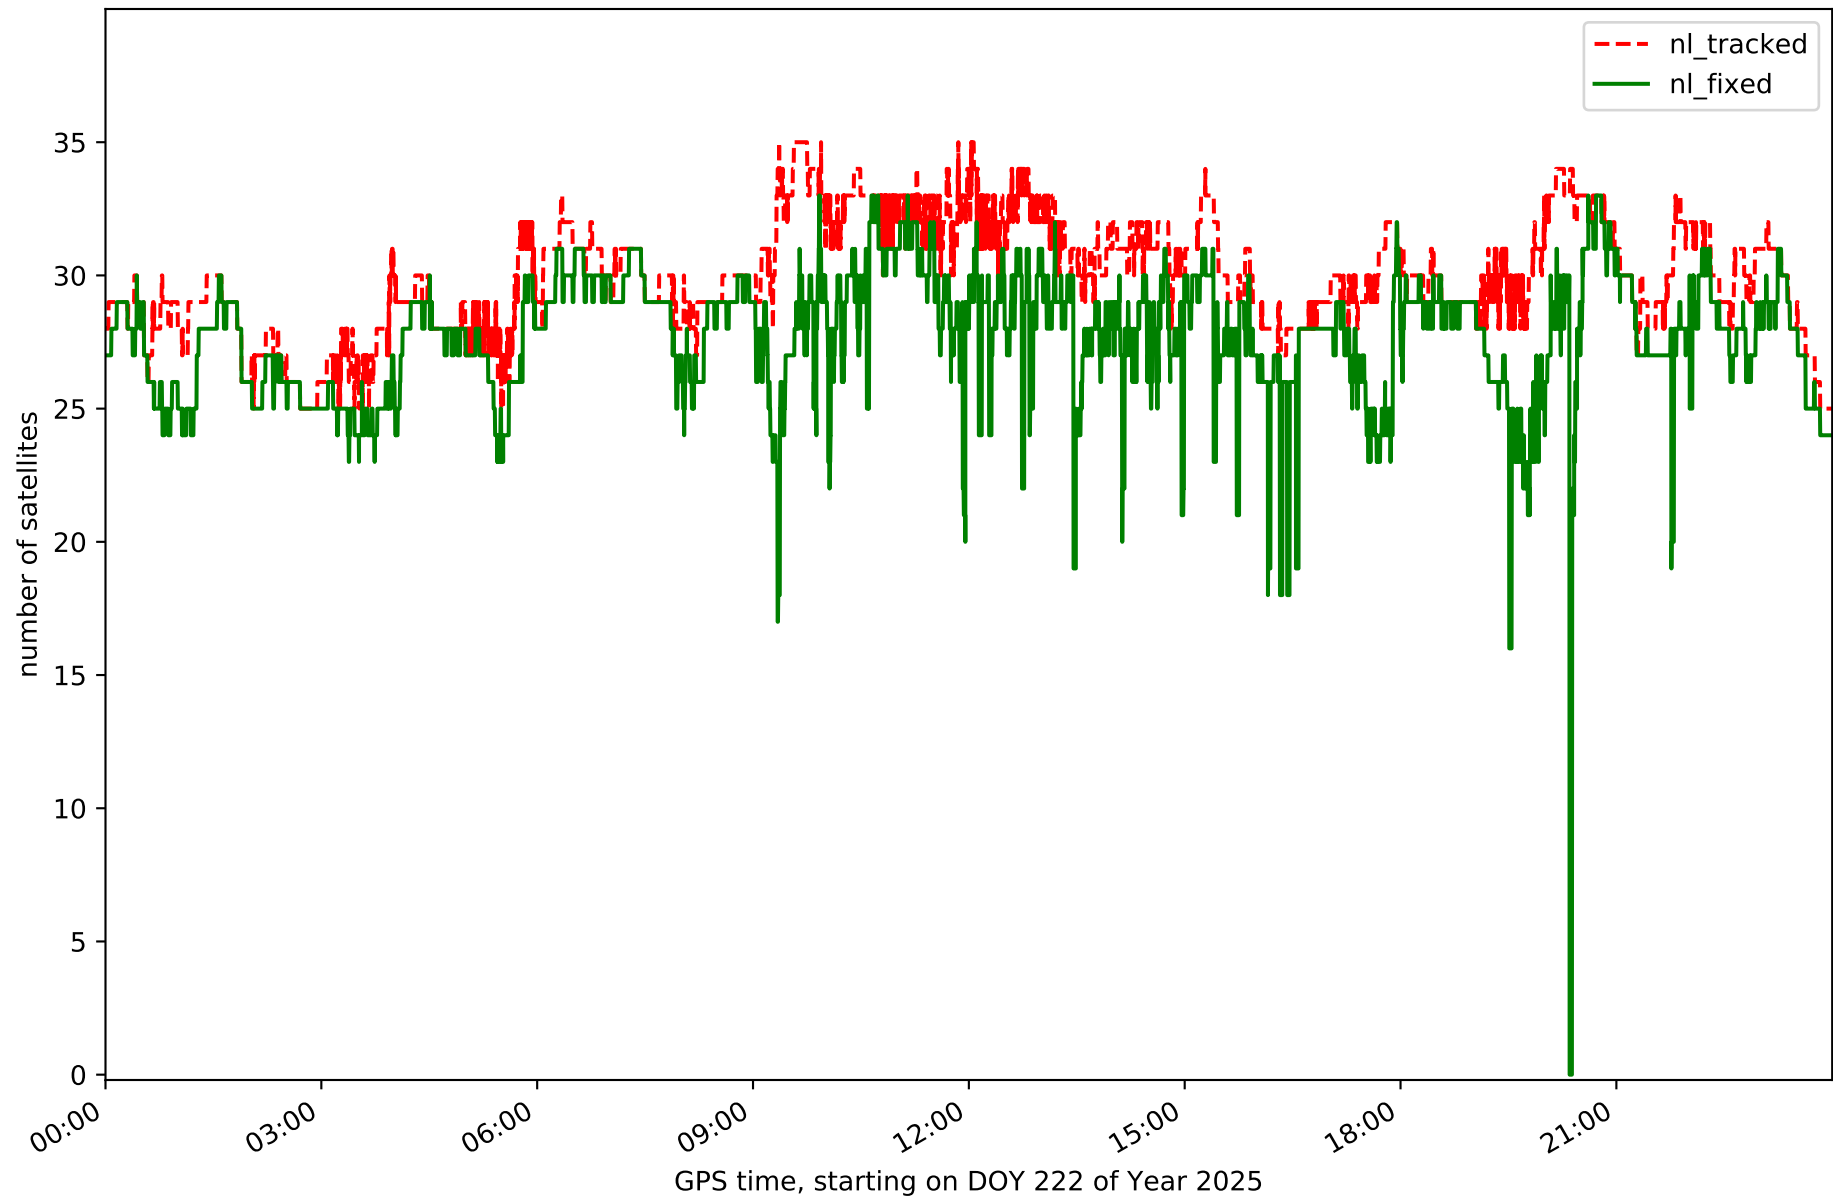


Station TRAU in network NT11

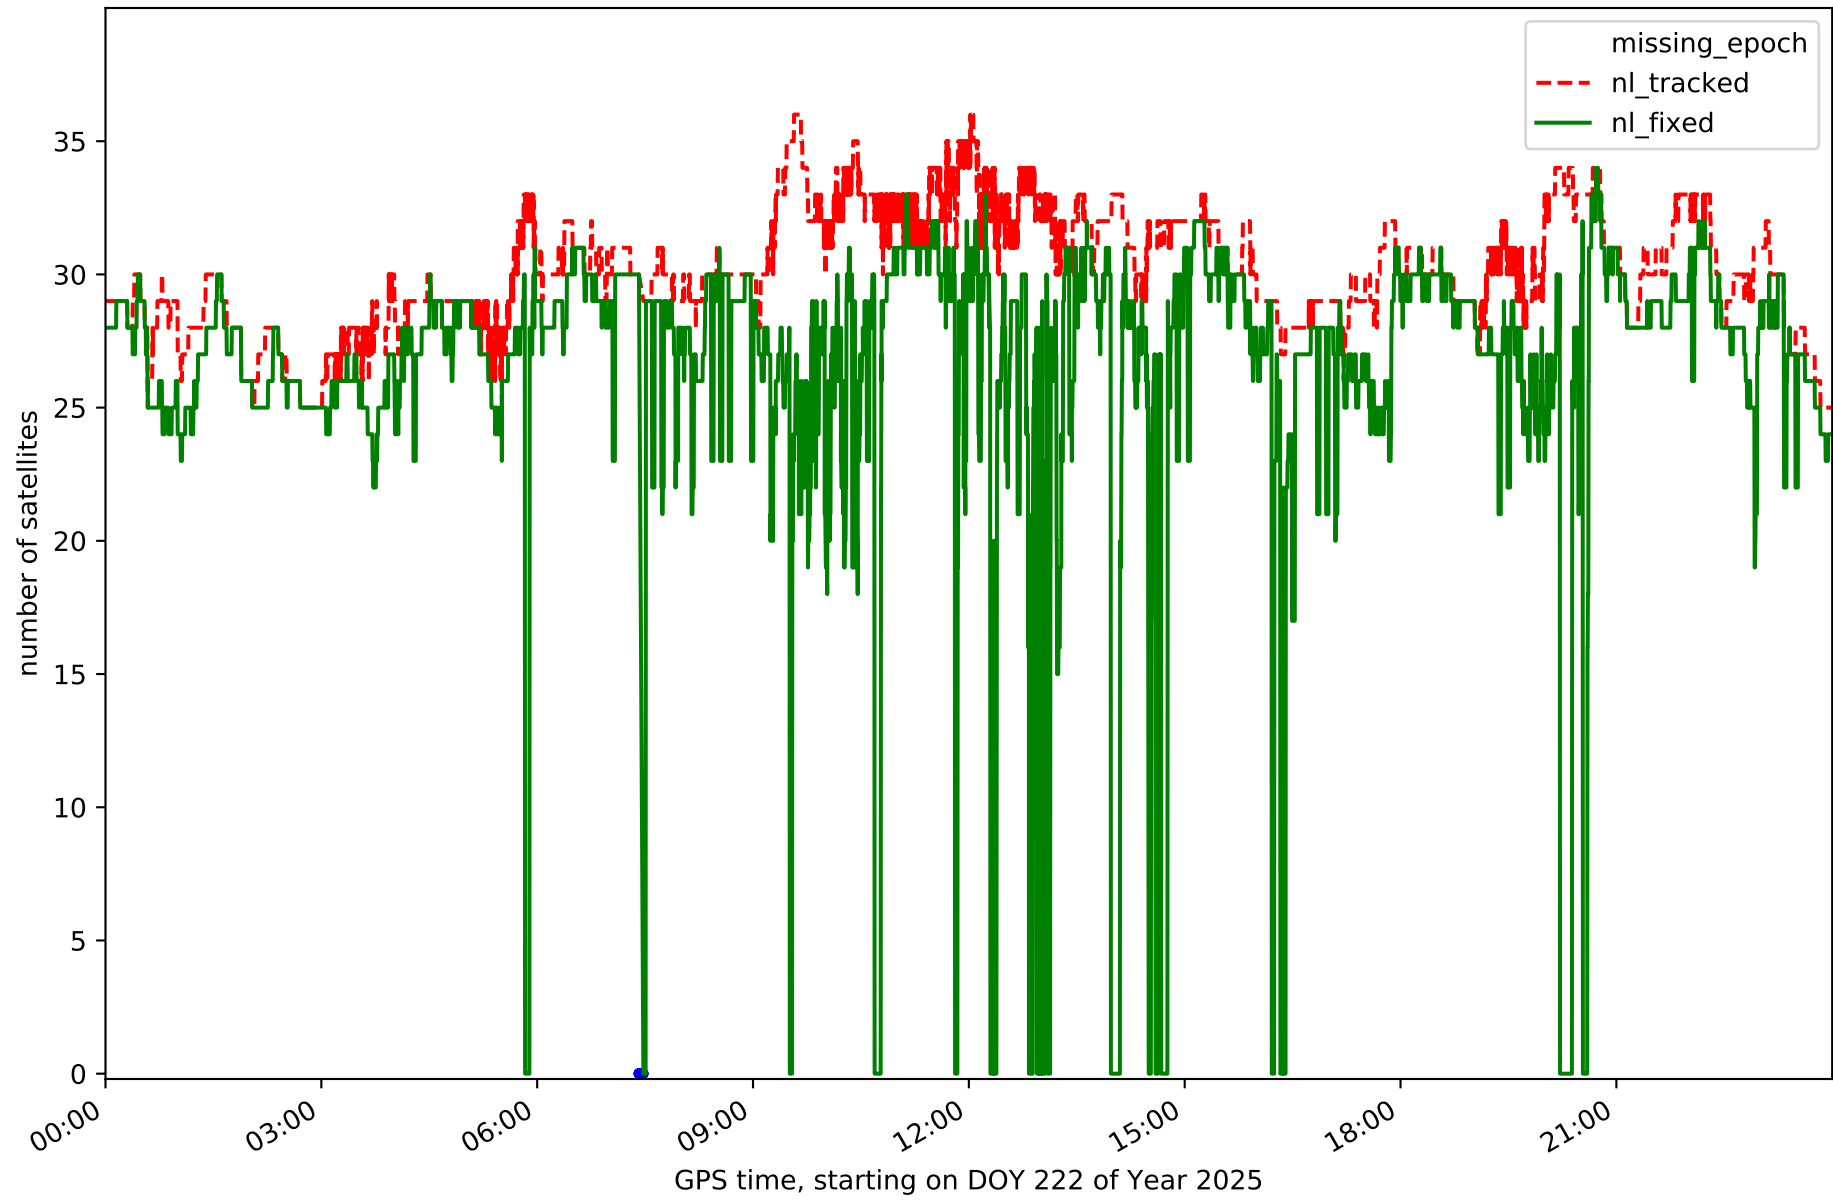


RefCheck for station ALOR in network NT11

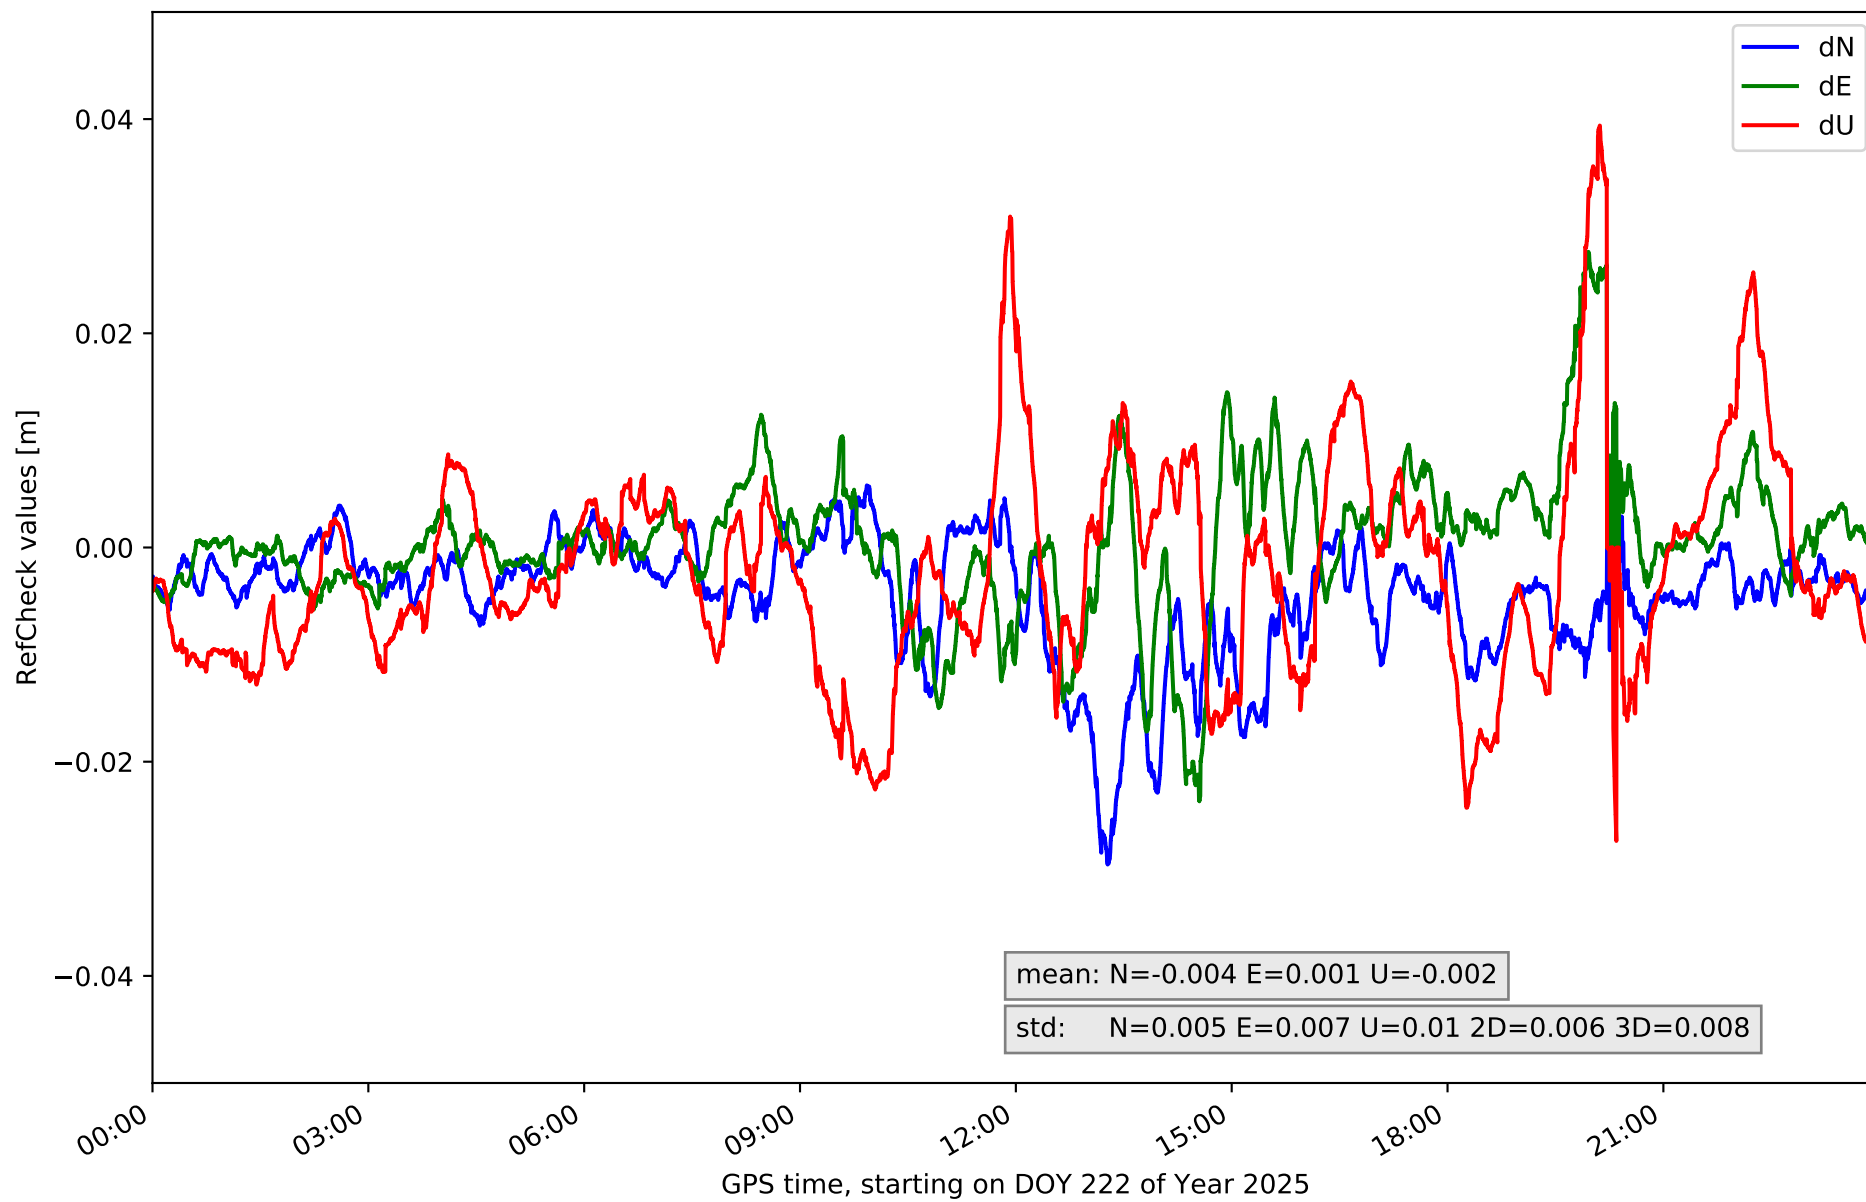


RefCheck for station CBON in network NT11

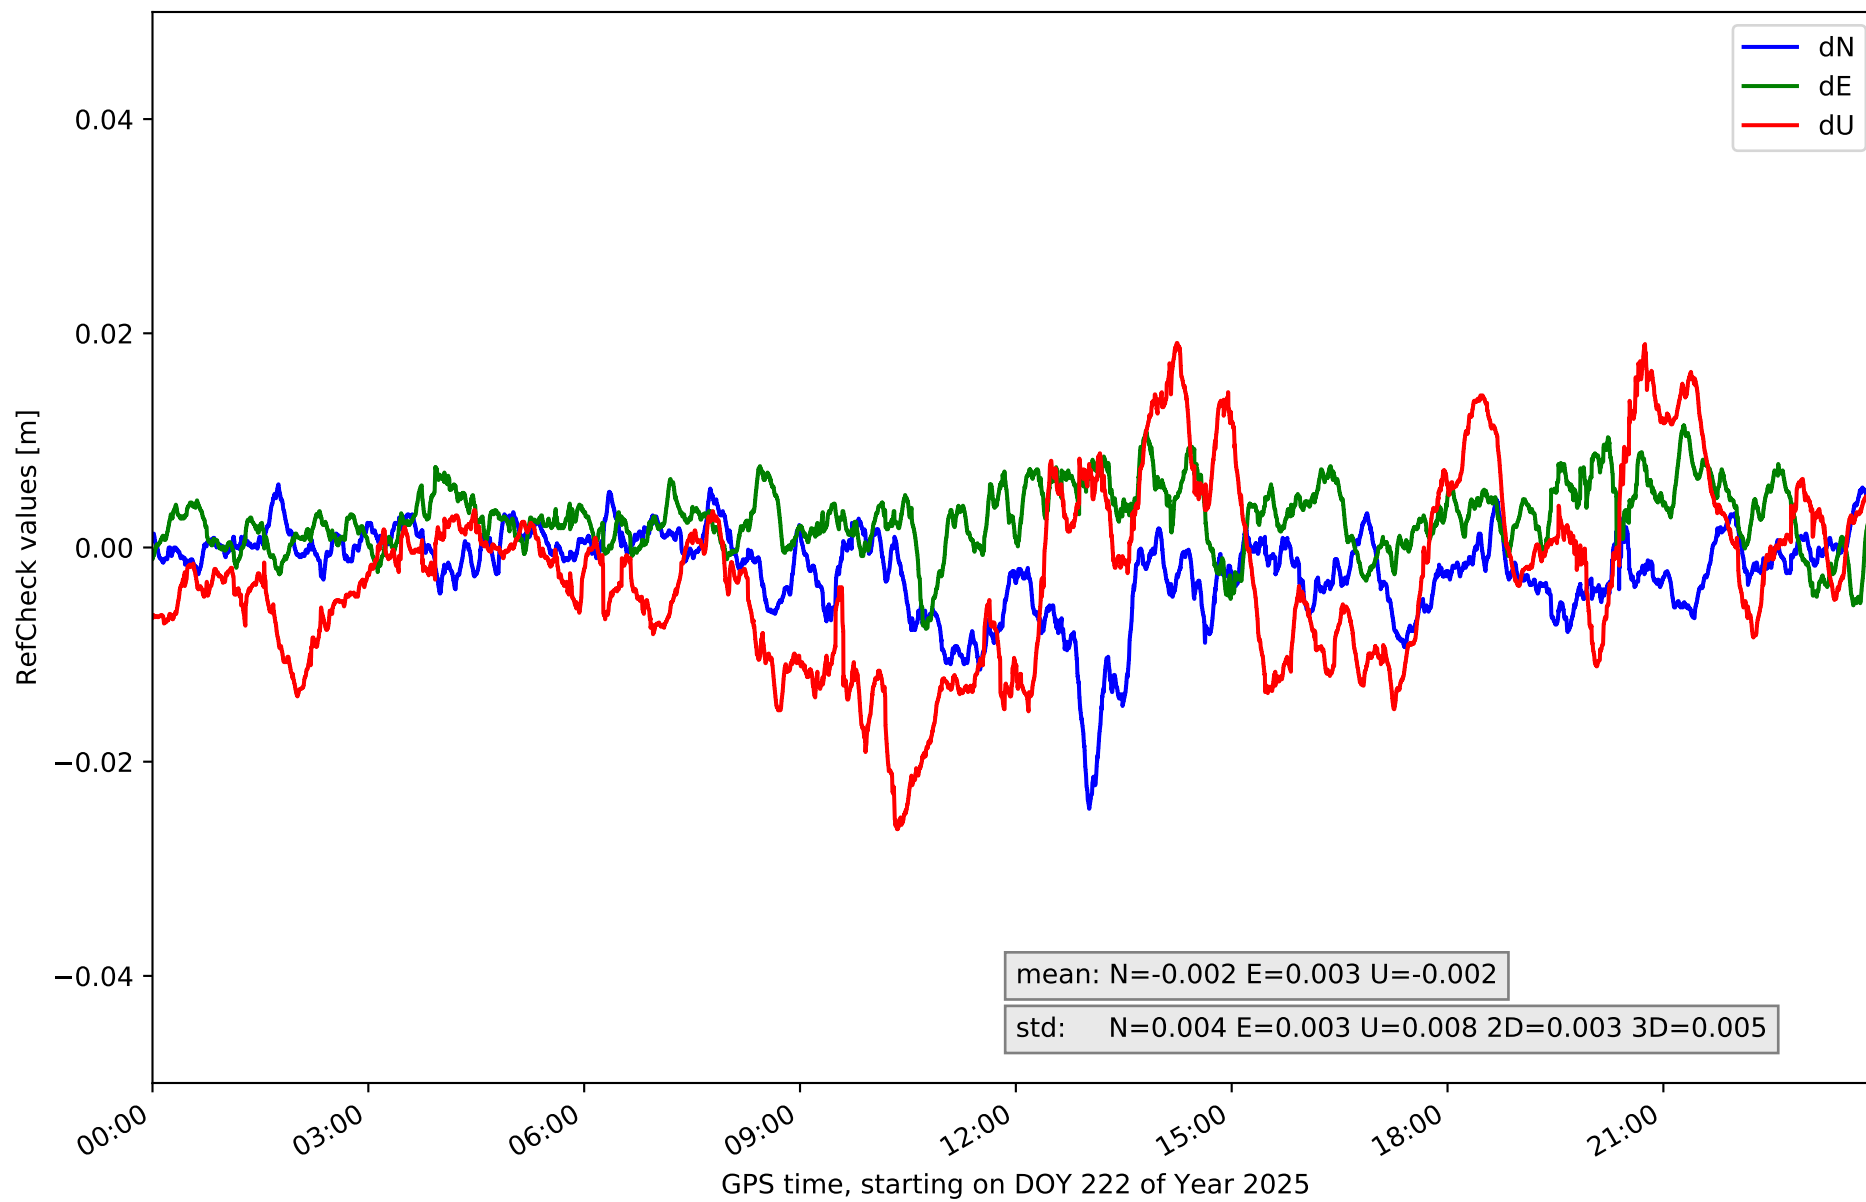


RefCheck for station EIVI in network NT11

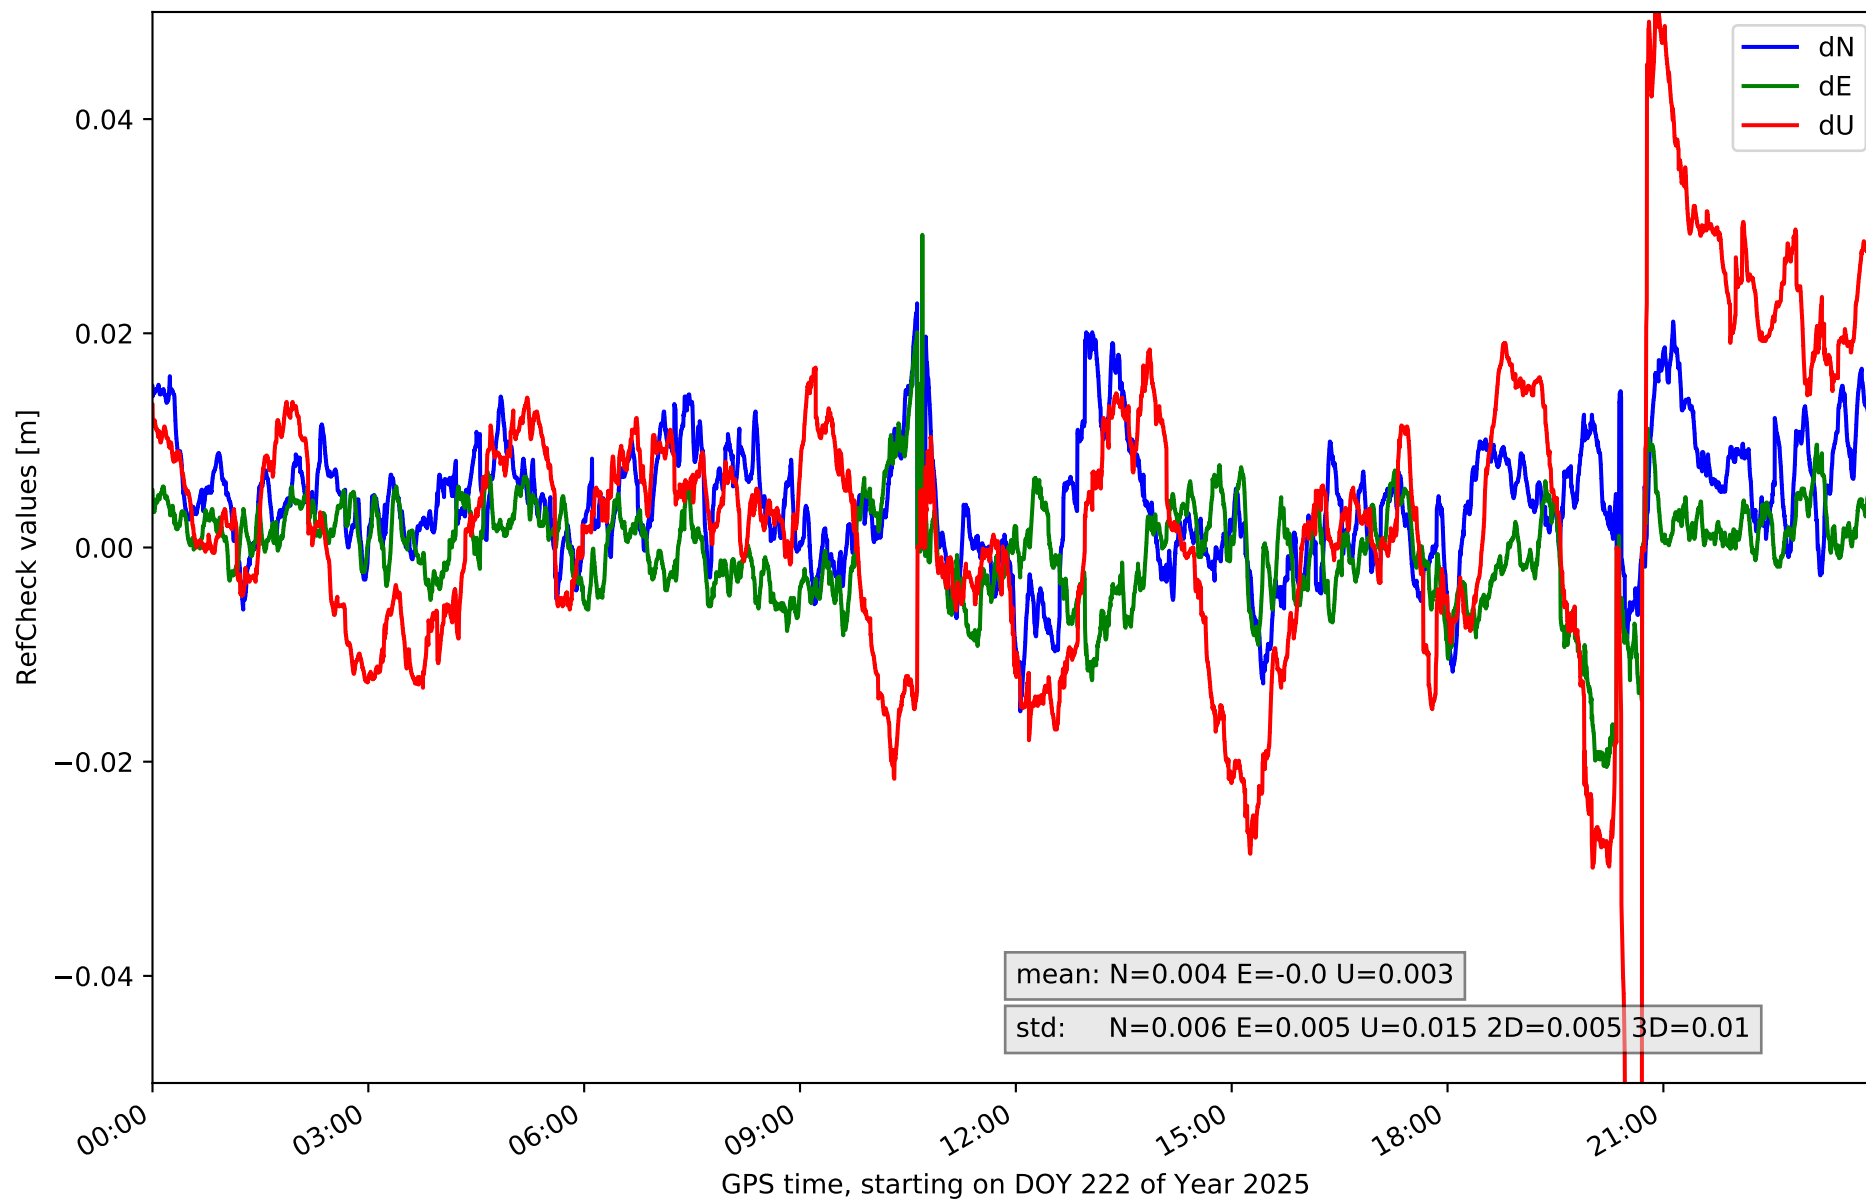


RefCheck for station FORM in network NT11

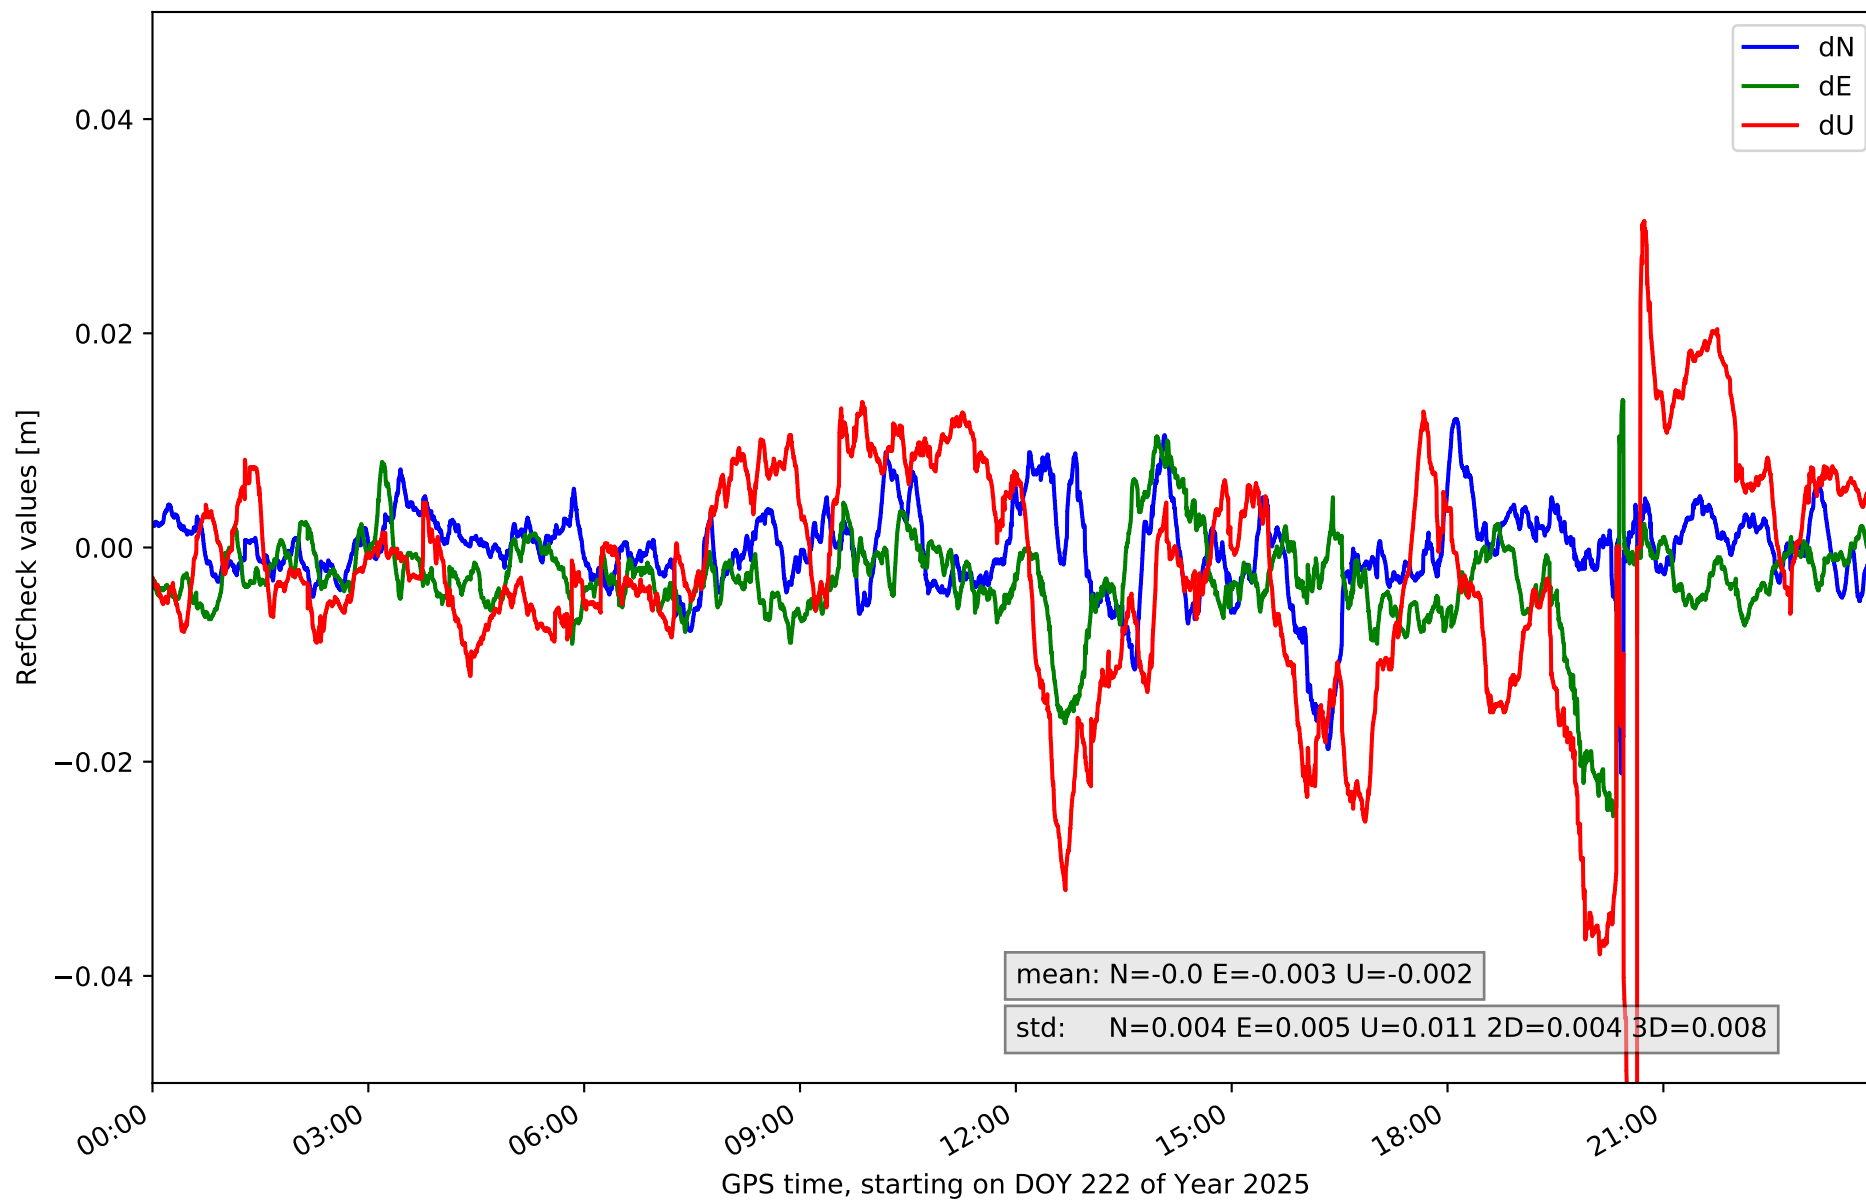


RefCheck for station IBIZ in network NT11

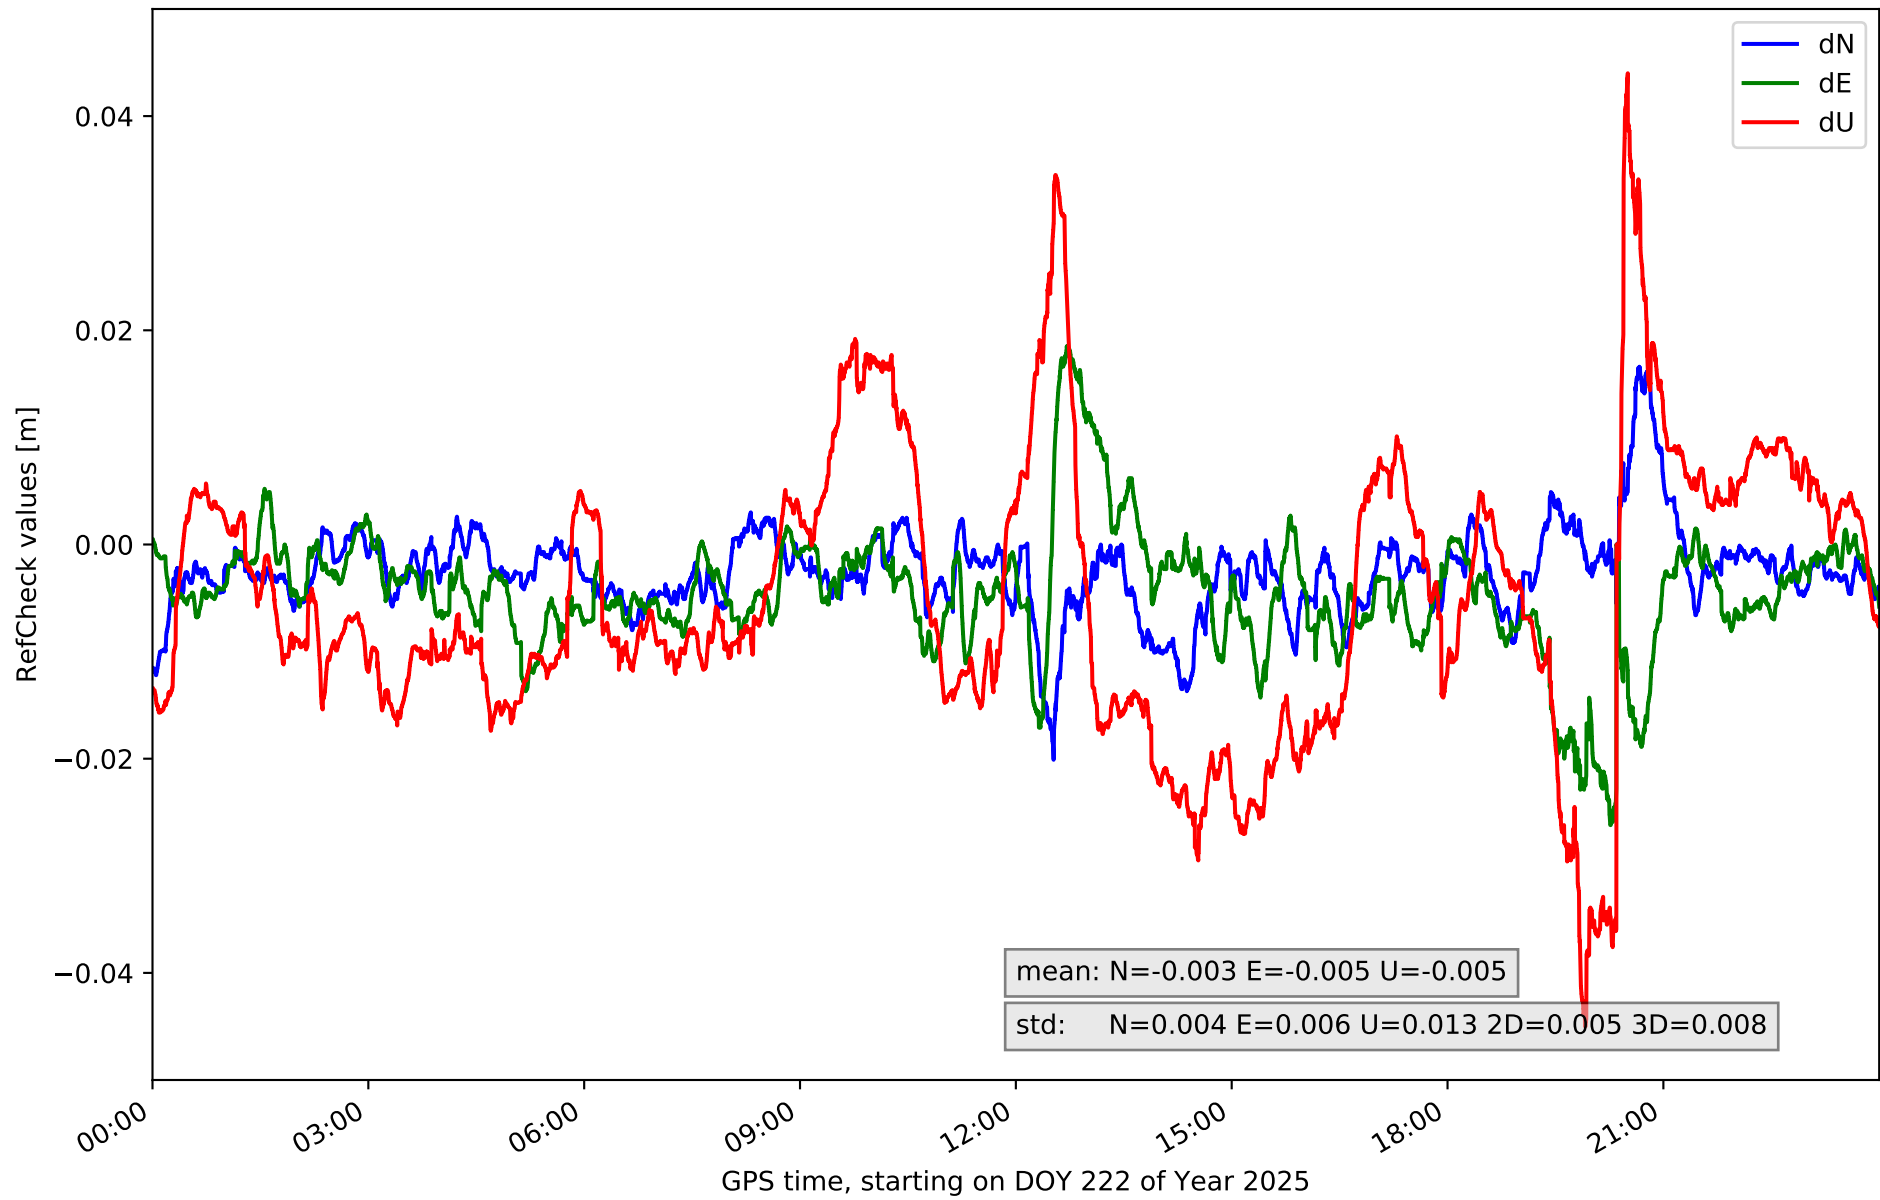


RefCheck for station MALL in network NT11

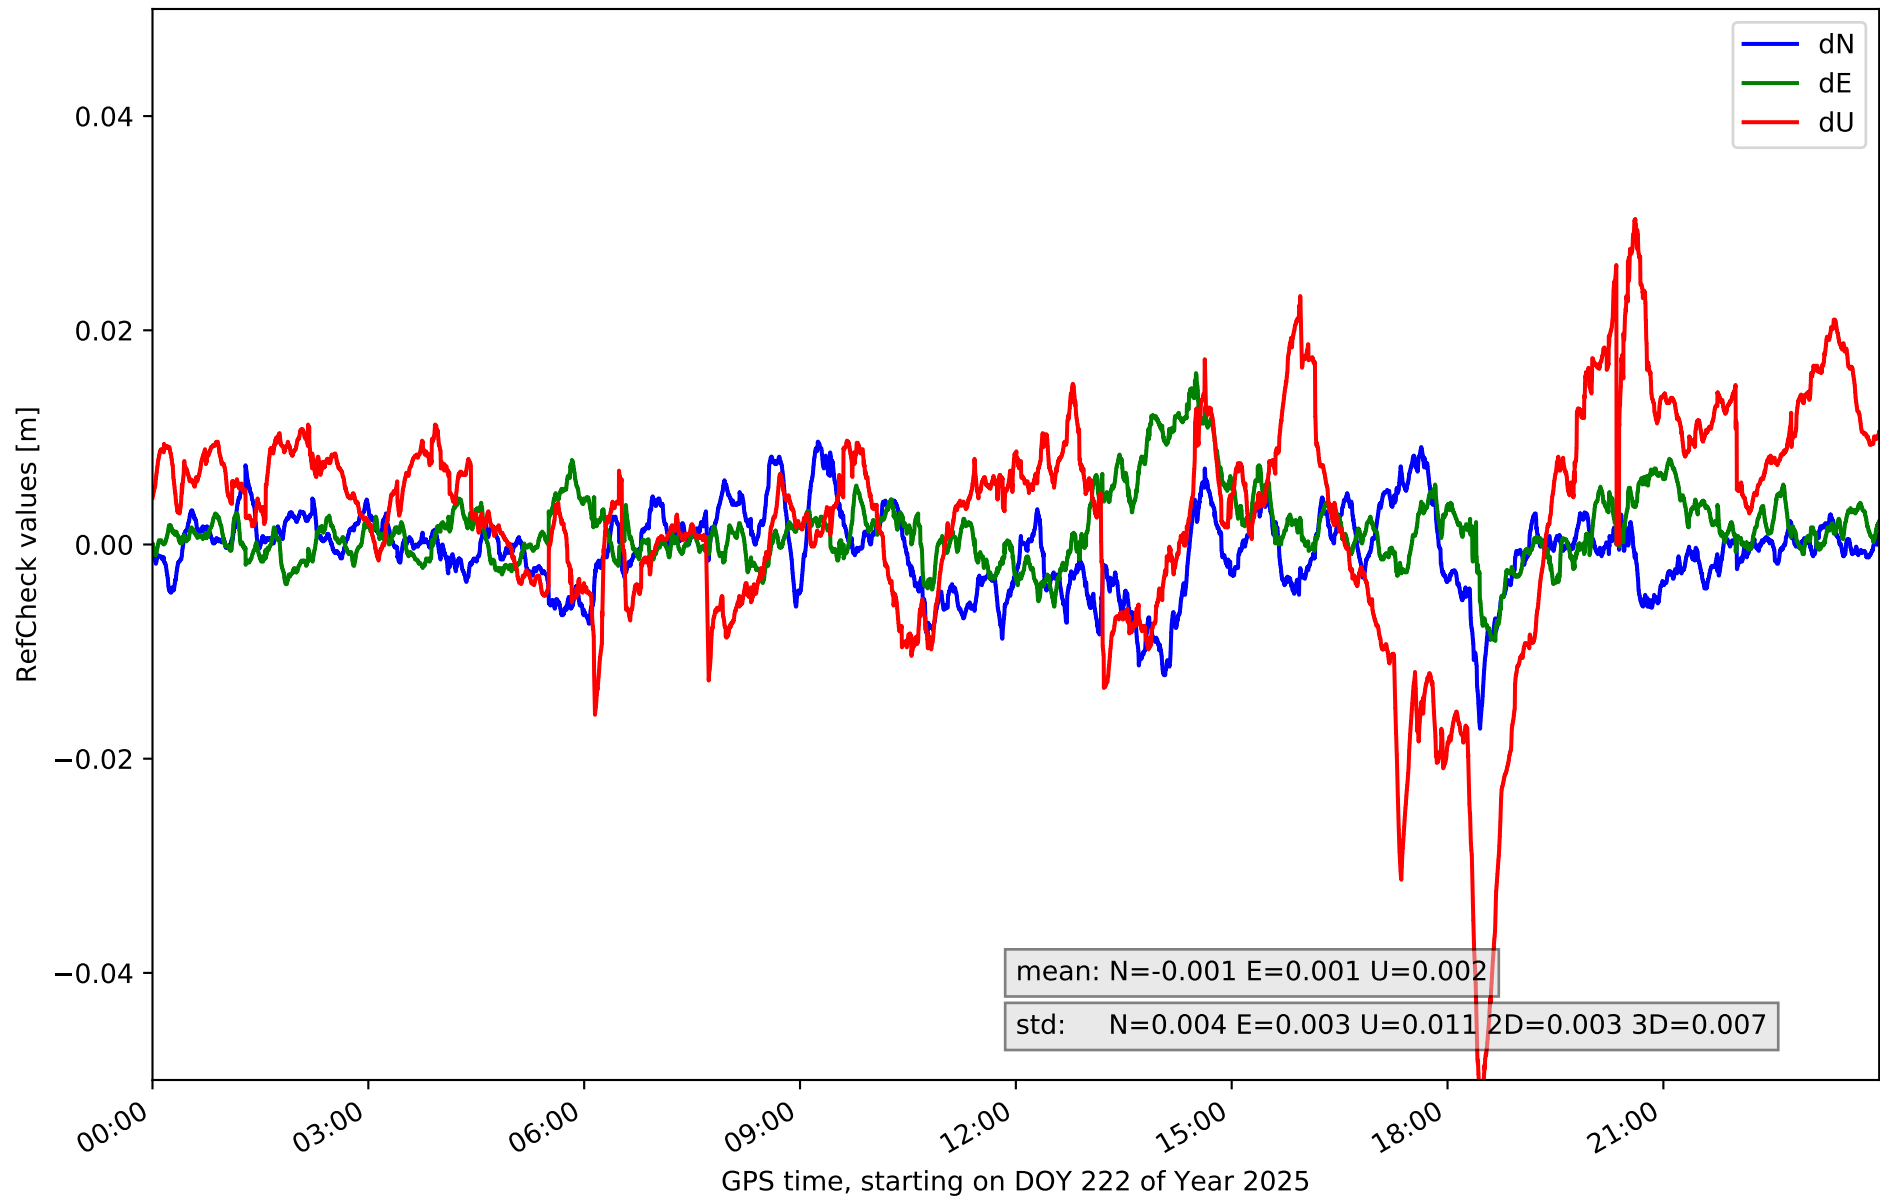


RefCheck for station SINE in network NT11

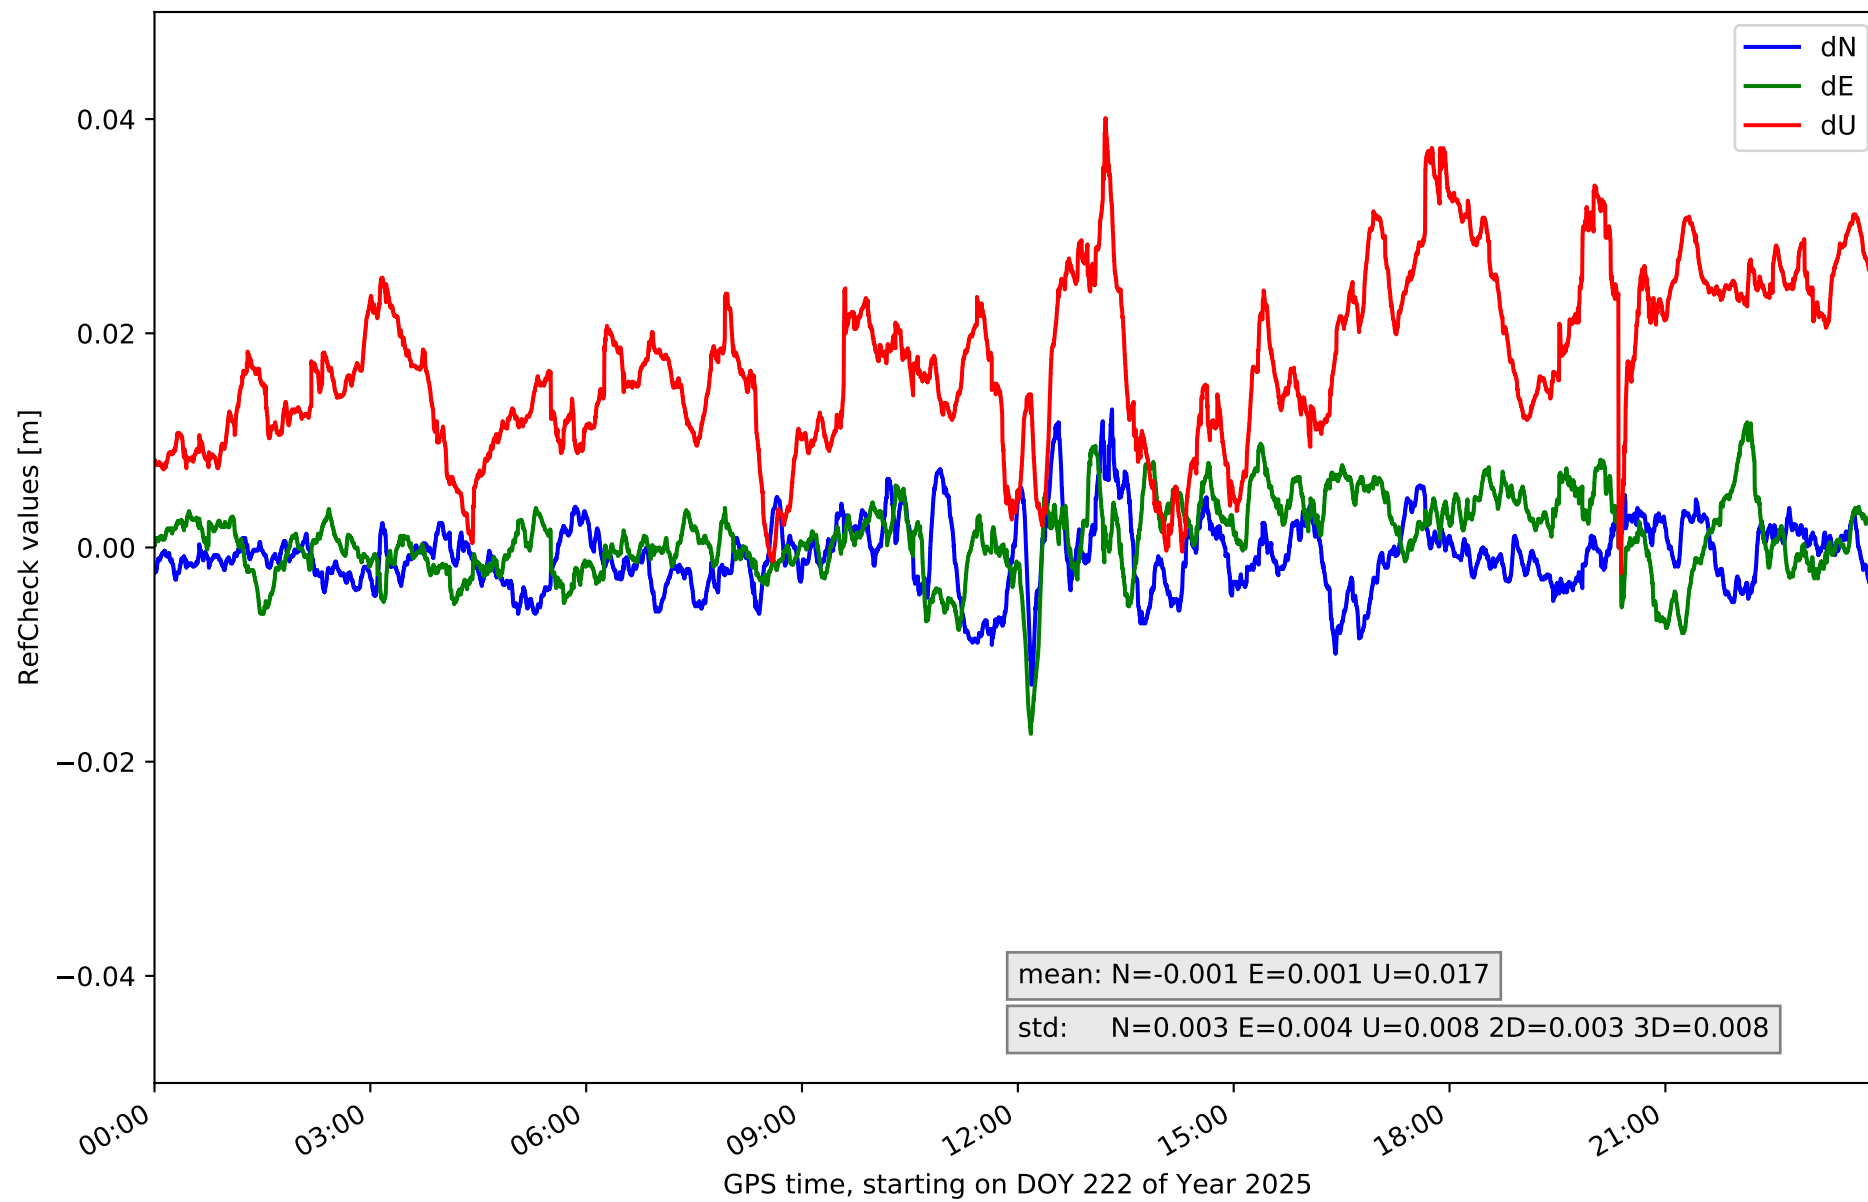

RefCheck for station SJO1 in network NT11

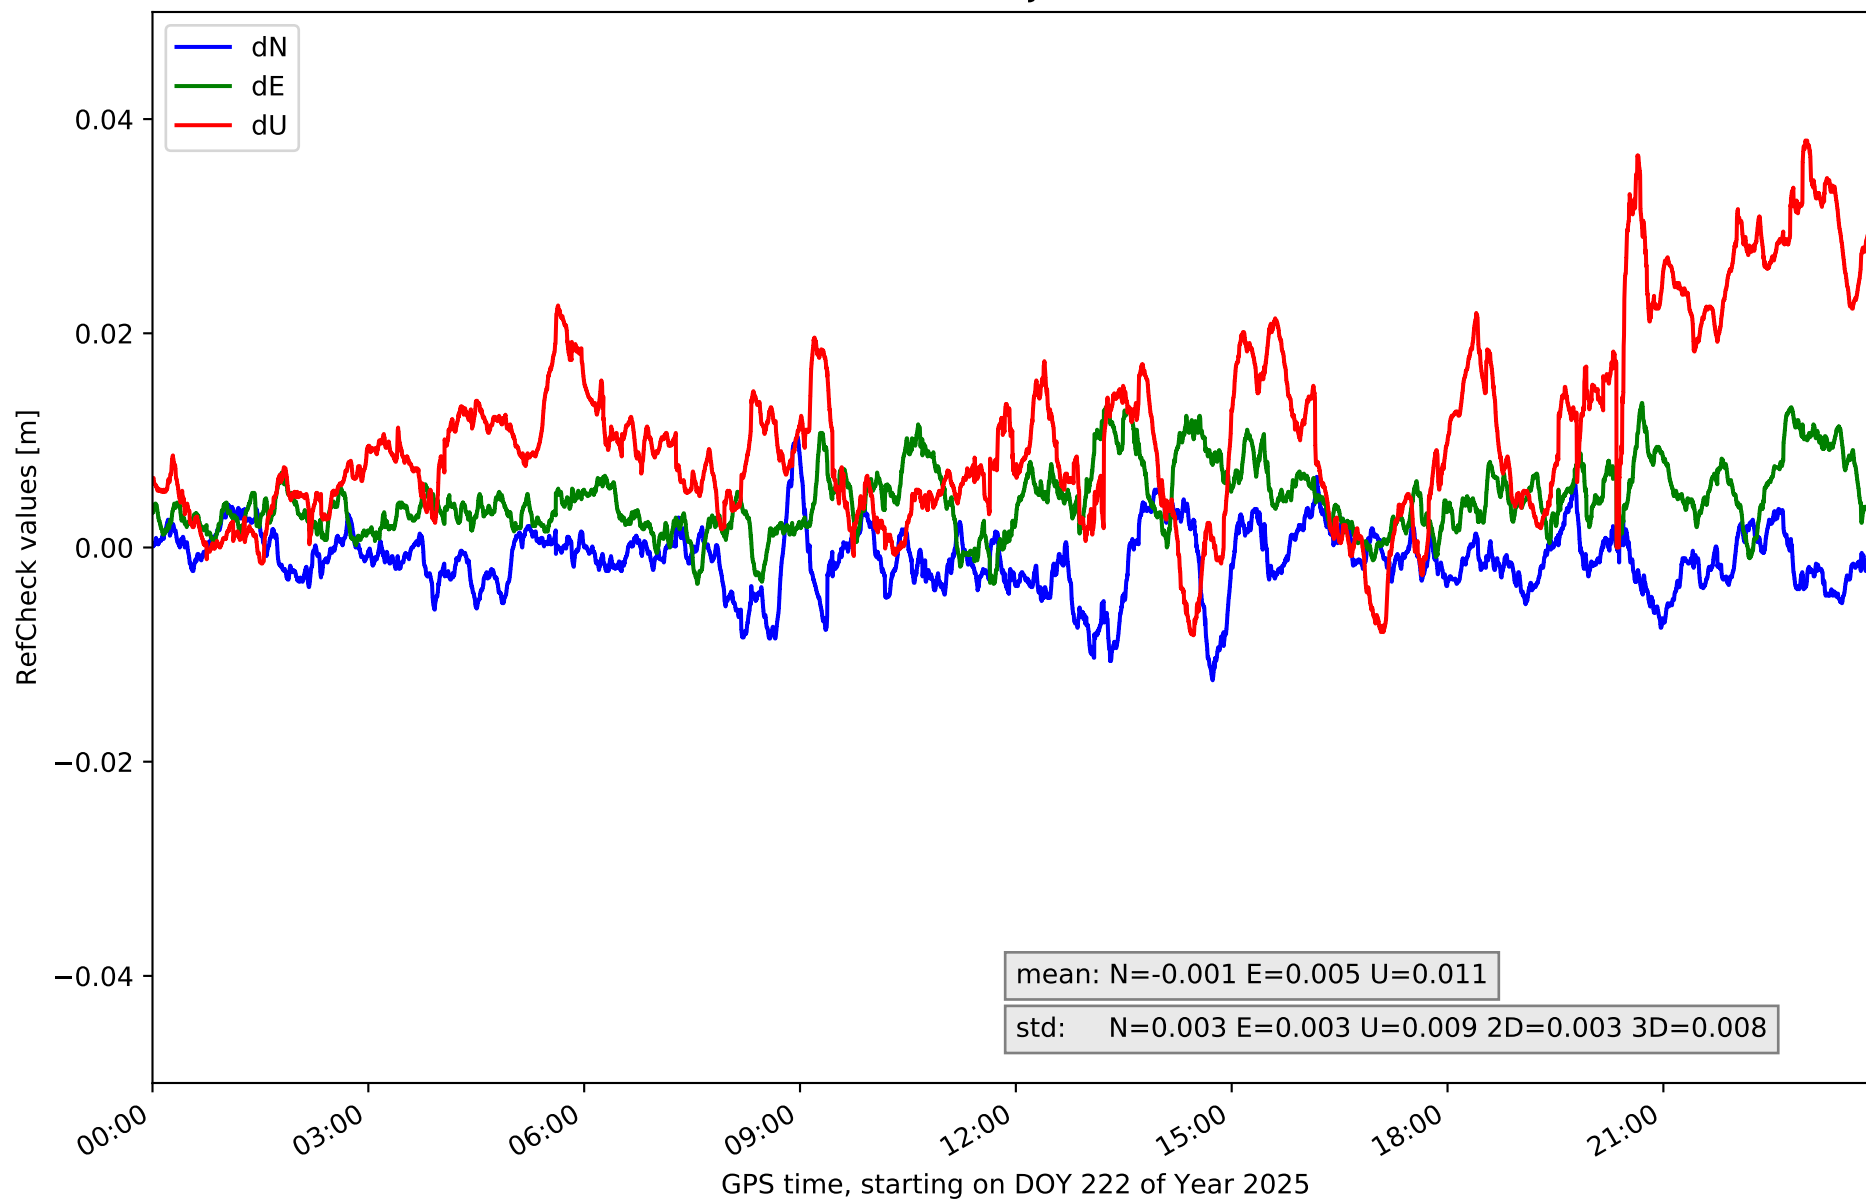

RefCheck for station TRAU in network NT11

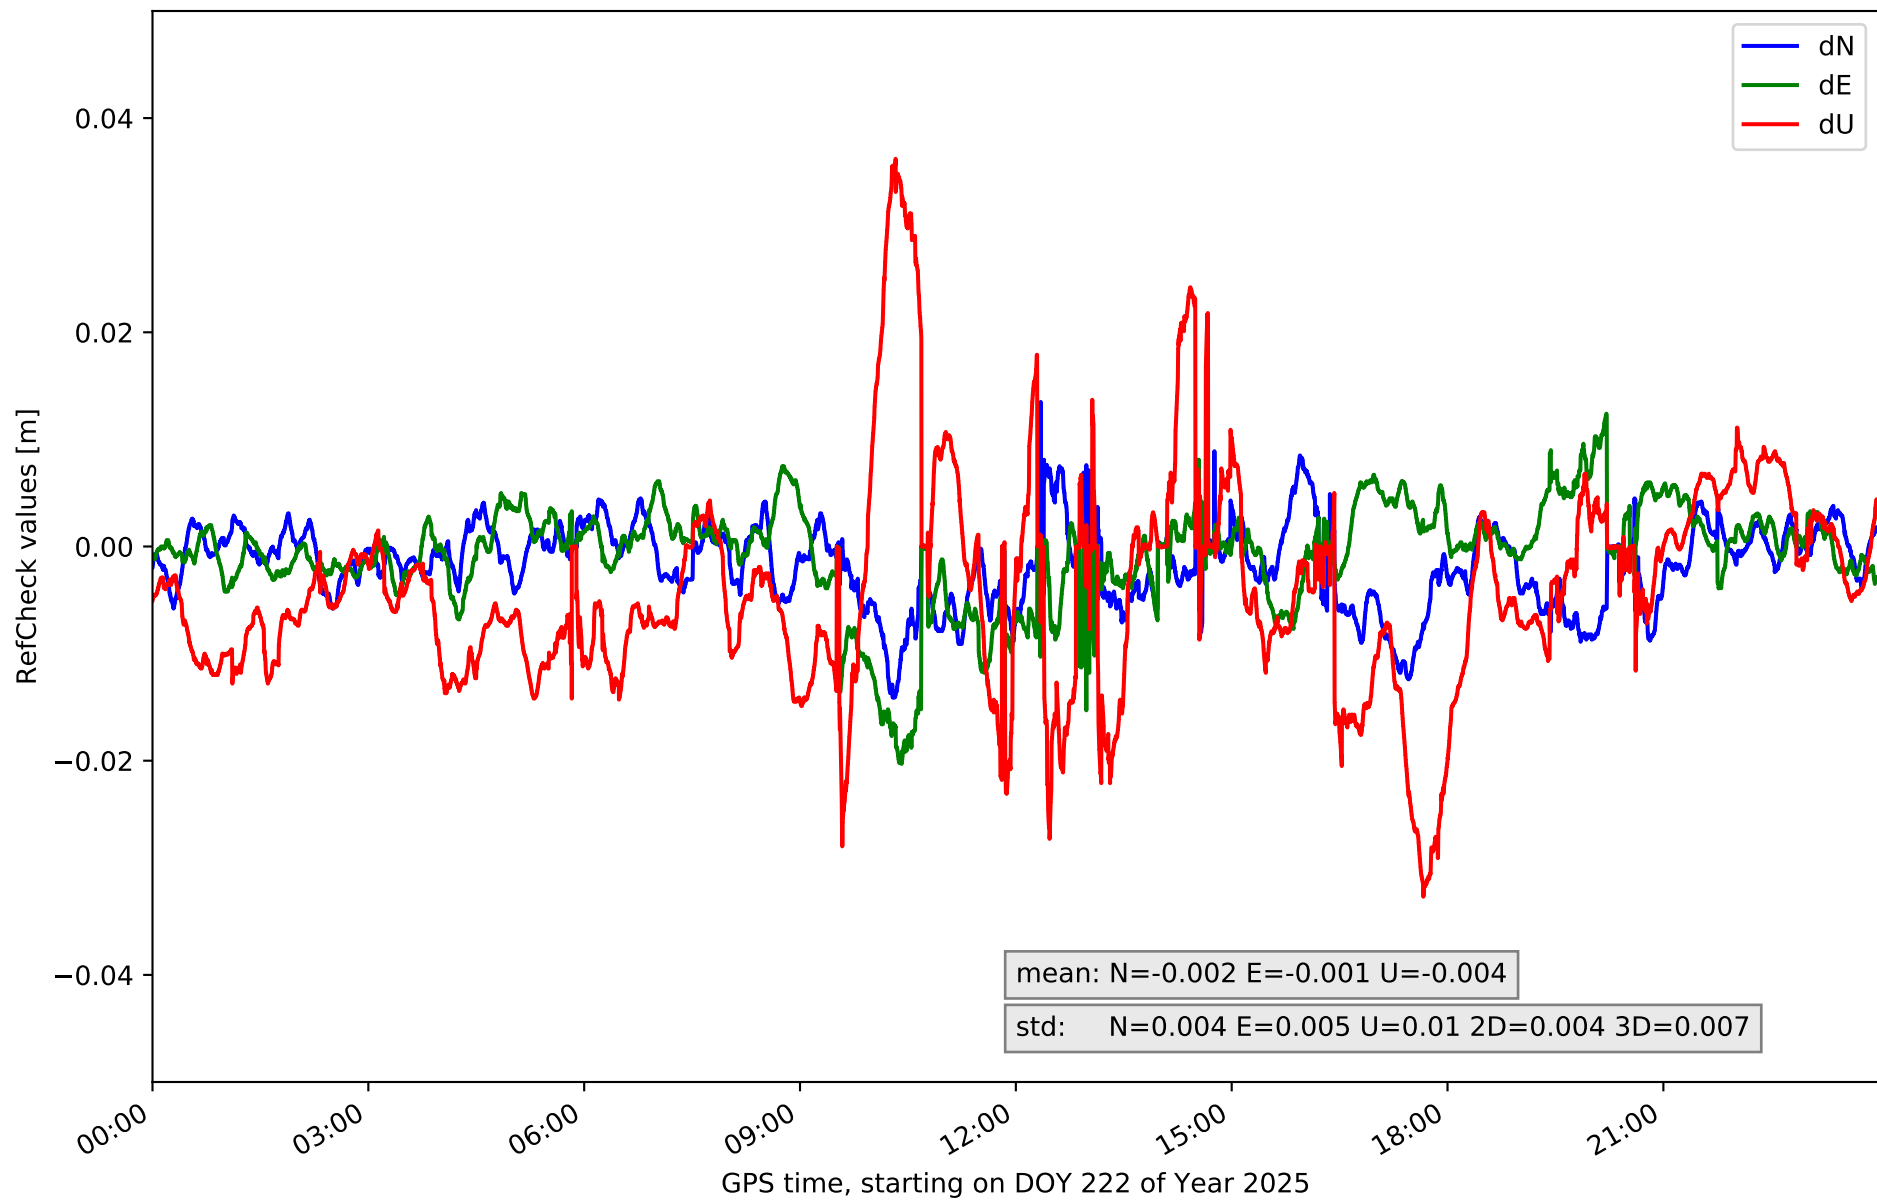

RefCheck values for network NT11

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
ALOR	-0.03	0.006	0.005	-0.024	0.028	0.007	-0.027	0.039	0.01	0.006	0.008	19307	23.9	12133	15.0
CBON	-0.024	0.006	0.004	-0.008	0.011	0.003	-0.026	0.019	0.008	0.003	0.005	5816	7.2	2884	3.6
EIVI	-0.015	0.023	0.006	-0.021	0.029	0.005	-0.06	0.051	0.015	0.005	0.01	18070	22.3	17100	21.1
FORM	-0.021	0.012	0.004	-0.025	0.014	0.005	-0.067	0.03	0.011	0.004	0.008	7378	9.1	8957	11.1
IBIZ	-0.02	0.017	0.004	-0.026	0.018	0.006	-0.045	0.044	0.013	0.005	0.008	15542	19.2	13647	16.9
MALL	-0.017	0.01	0.004	-0.009	0.016	0.003	-0.055	0.03	0.011	0.003	0.007	5021	6.2	5243	6.5
SINE	-0.013	0.013	0.003	-0.017	0.012	0.004	-0.002	0.04	0.008	0.003	0.008	2504	3.1	32096	39.7
SJO1	-0.012	0.01	0.003	-0.003	0.013	0.003	-0.008	0.038	0.009	0.003	0.008	10094	12.5	15224	18.8
TRAU	-0.014	0.013	0.004	-0.02	0.012	0.005	-0.033	0.036	0.01	0.004	0.007	8106	10.0	6857	8.5
Mean	-0.018	0.012	0.004	-0.017	0.017	0.005	-0.036	0.036	0.011	0.004	0.008	10204.2	12.6	12682.3	15.7
Min/Max	-0.03	0.023	0.006	-0.026	0.029	0.007	-0.067	0.051	0.015	0.006	0.01	19307	23.9	32096	39.7

fixing statistic for network NT11

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	93.7	95.4	93.6	95.7	90.3
considering satellites with dual-frequency fixed	88.8	90.3	88.4	91.9	85.1
considering all signals separately	88.9	90.3	88.4	91.8	84.2