

summary for network N31T

timeperiod chosen: from 2026-08-17-00:00:00 until 2026-08-17-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.1 seconds


average fixing percentage with threshold set to 0.3: 86.9 percent

stations available: 7 of 7


station information:

station FUER:	antenna: LEIAR20	LEIM	receiver: LEICA GR50	height: 76.887
station LALA:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE NETR9	height: 62.306
station LZ01:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE NETR9	height: 52.693
station LZ02:	antenna: LEIAR20	NONE	receiver: LEICA GR25	height: 58.039
station LZ03:	antenna: LEIAR20	NONE	receiver: LEICA GR50	height: 314.762
station MASP:	antenna: TRM159900.00	SCIS	receiver: TRIMBLE NETR9	height: 198.846
station ULP2:	antenna: TRM59900.00	SCIS	receiver: TRIMBLE ALLOY	height: 375.129


Processing rate in network N31T

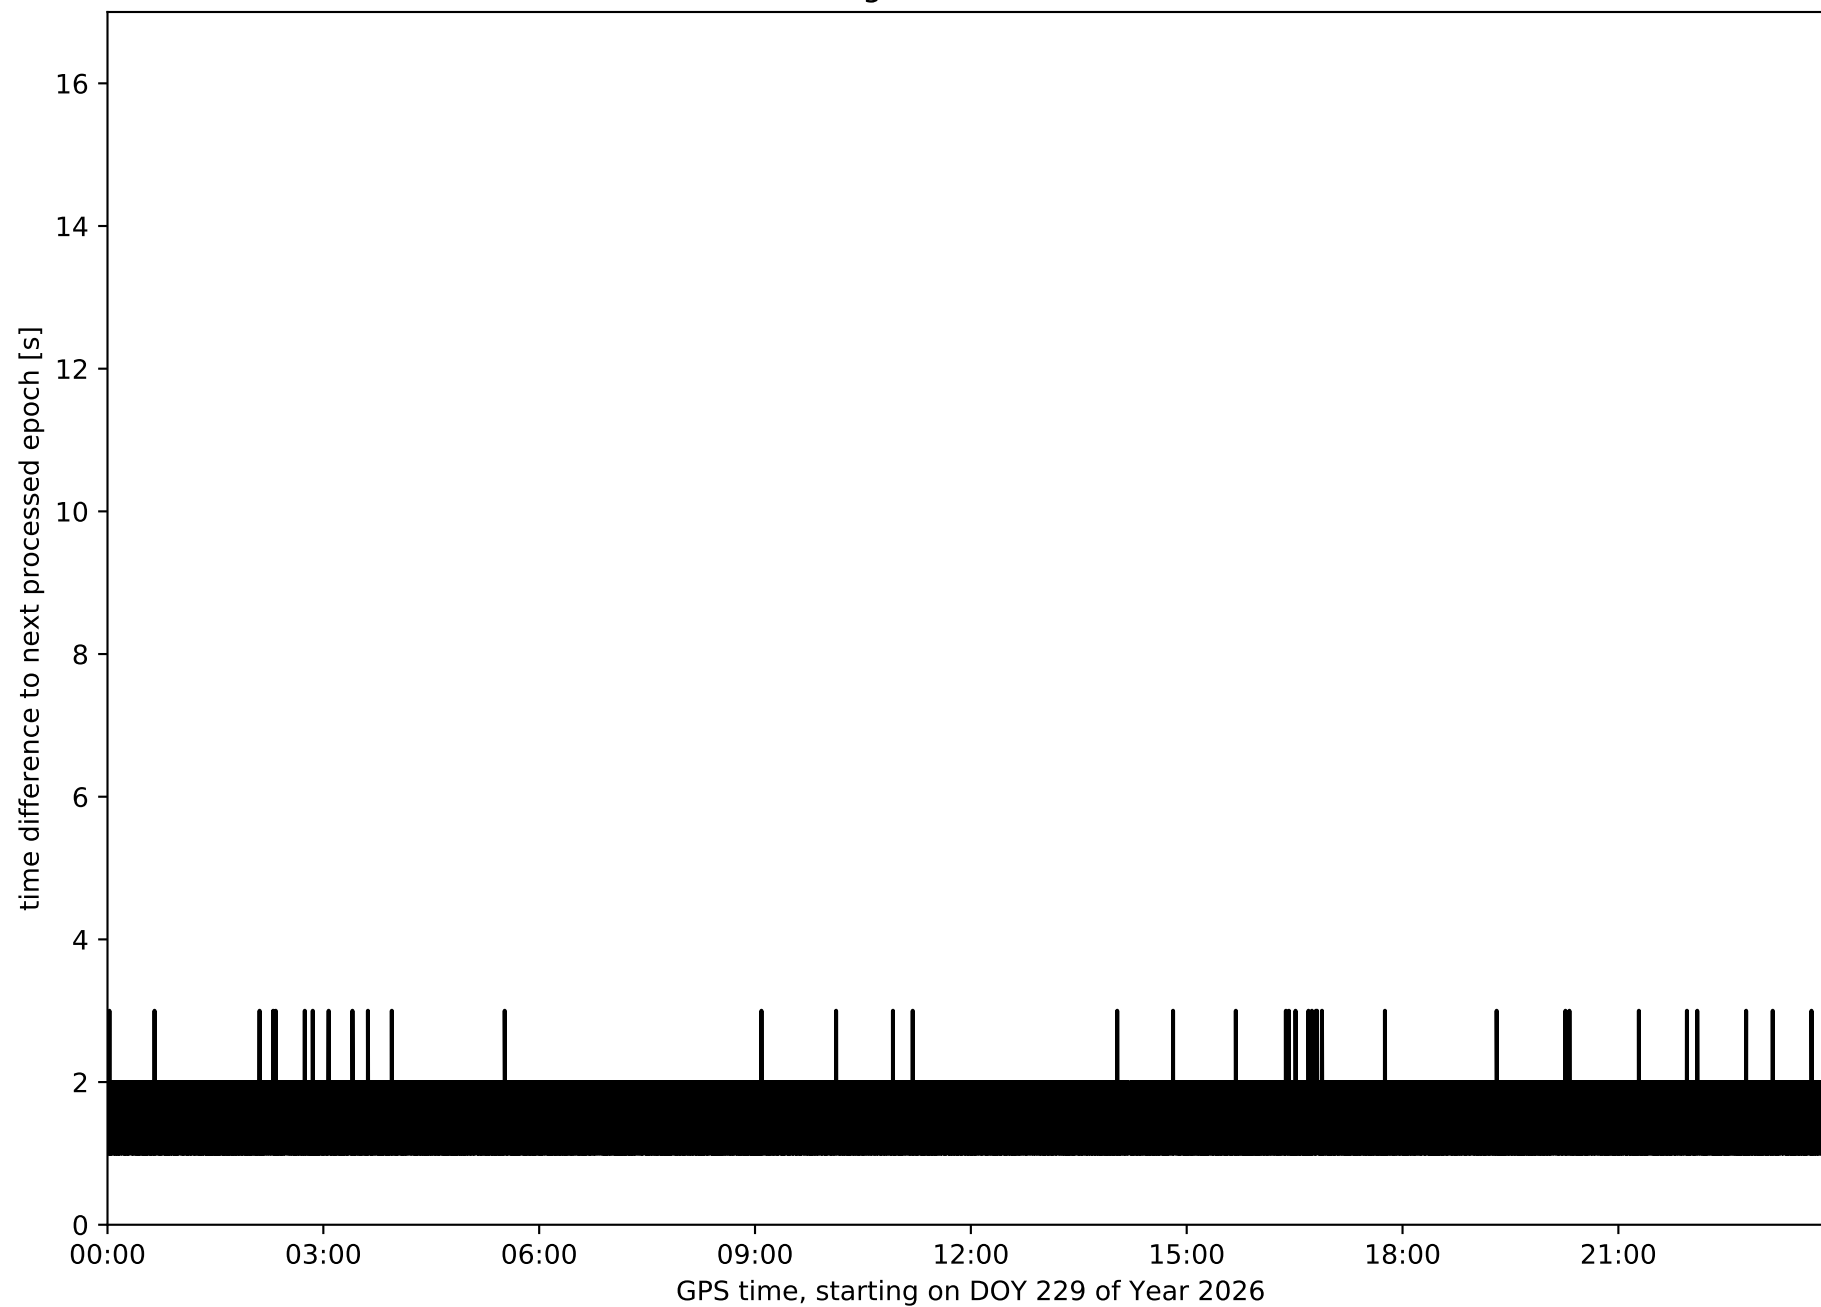


Histogram of the processing rate in network N31T (durations larger 15 seconds neglected)

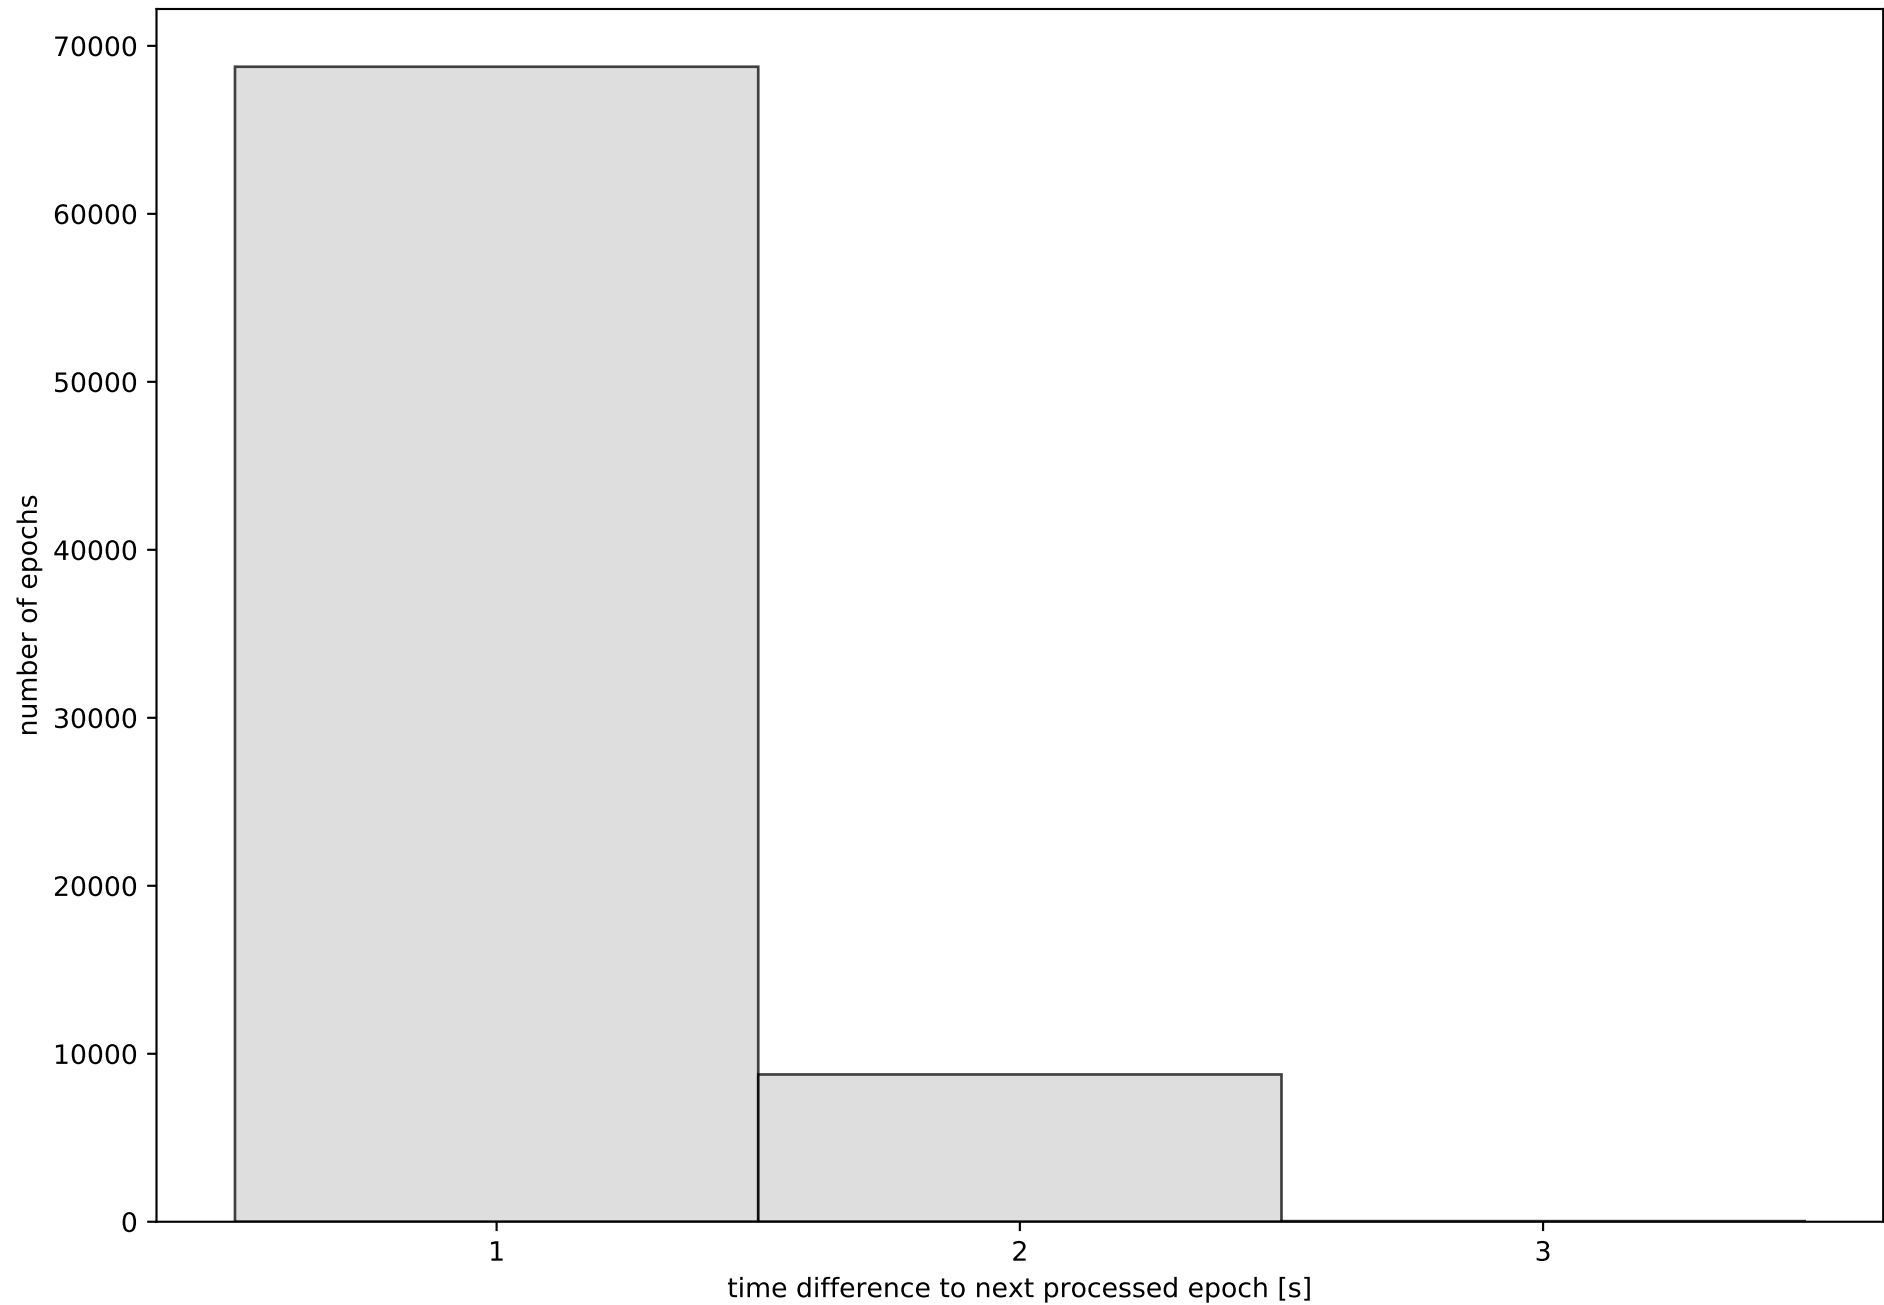


Network N31T with threshold set to 0.3

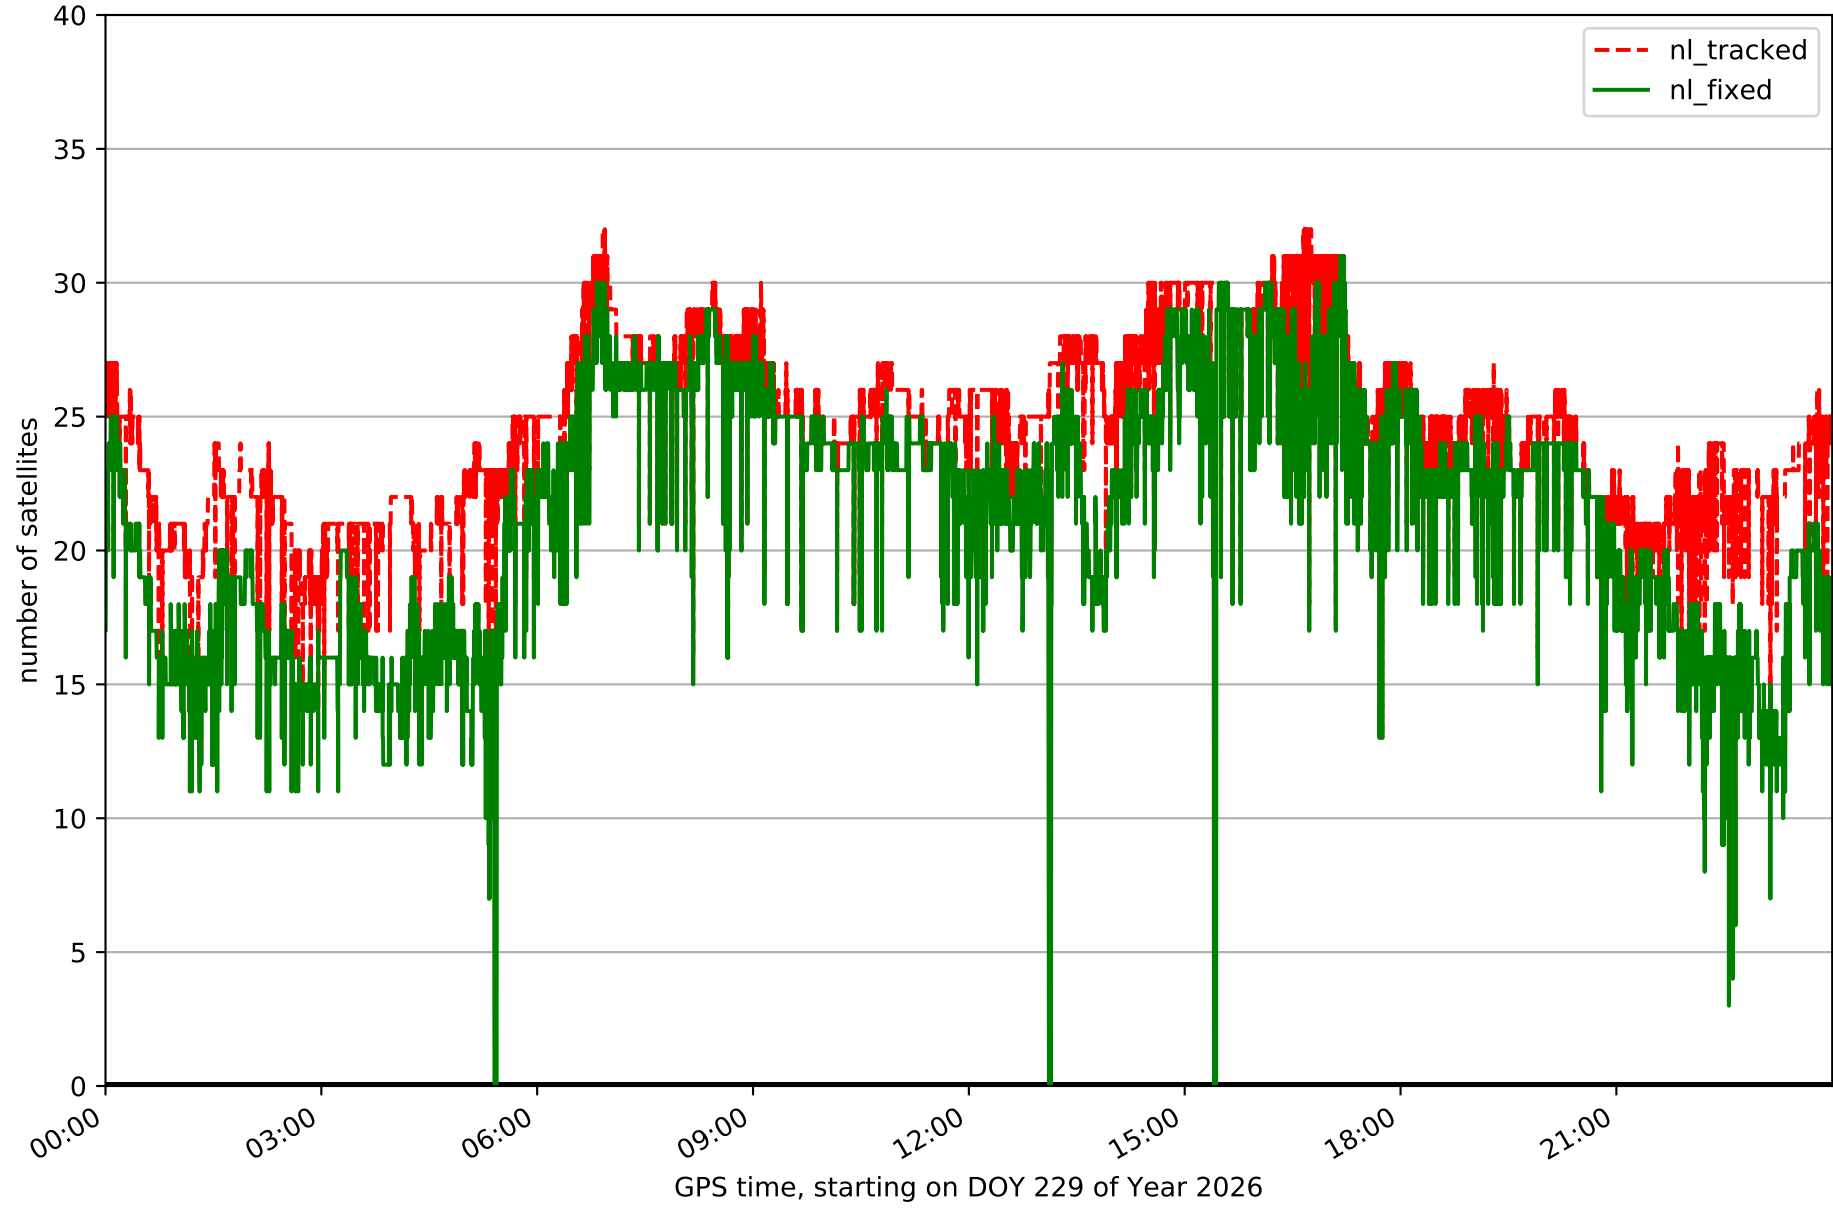


Fixing percentage of satellites in network N31T with threshold set to 0.3

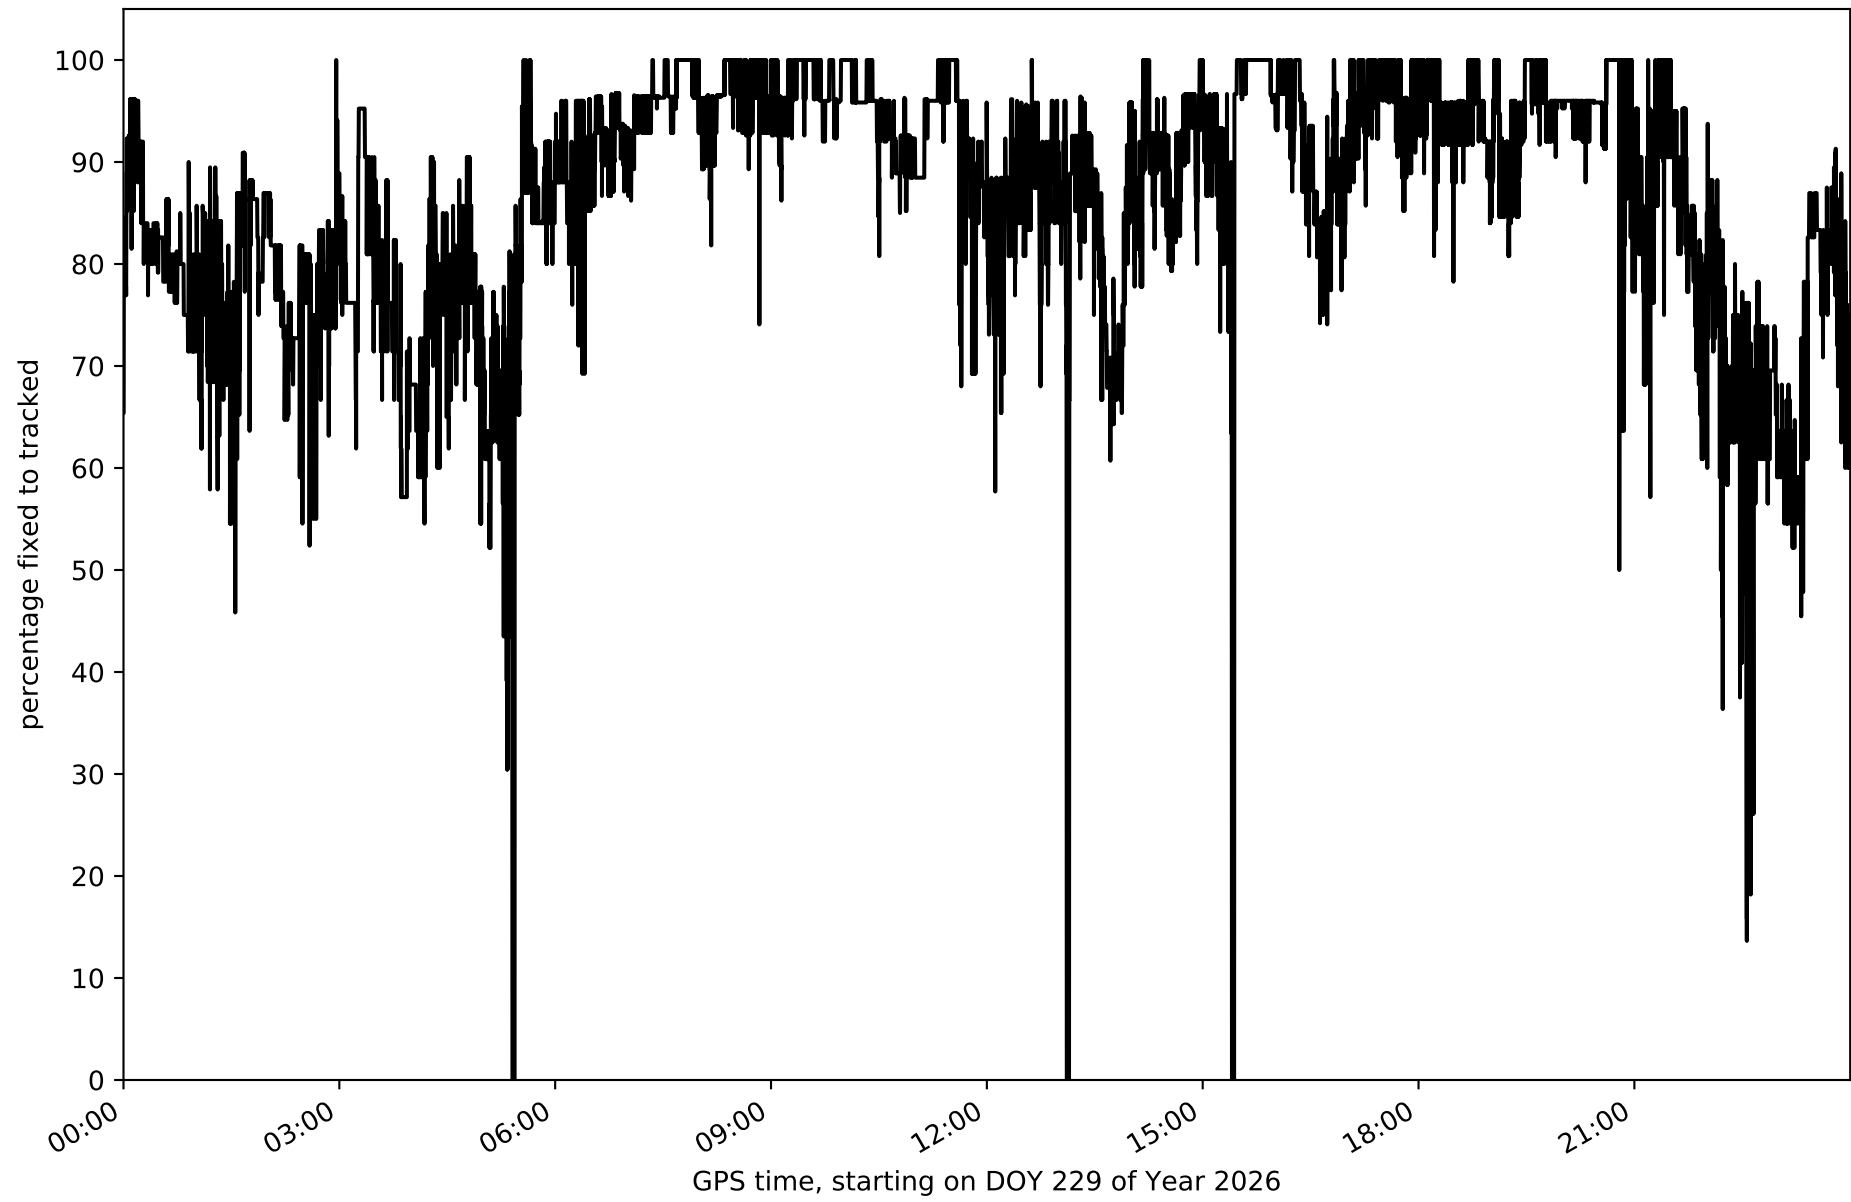


Network N31T - only GPS with threshold set to 0.3

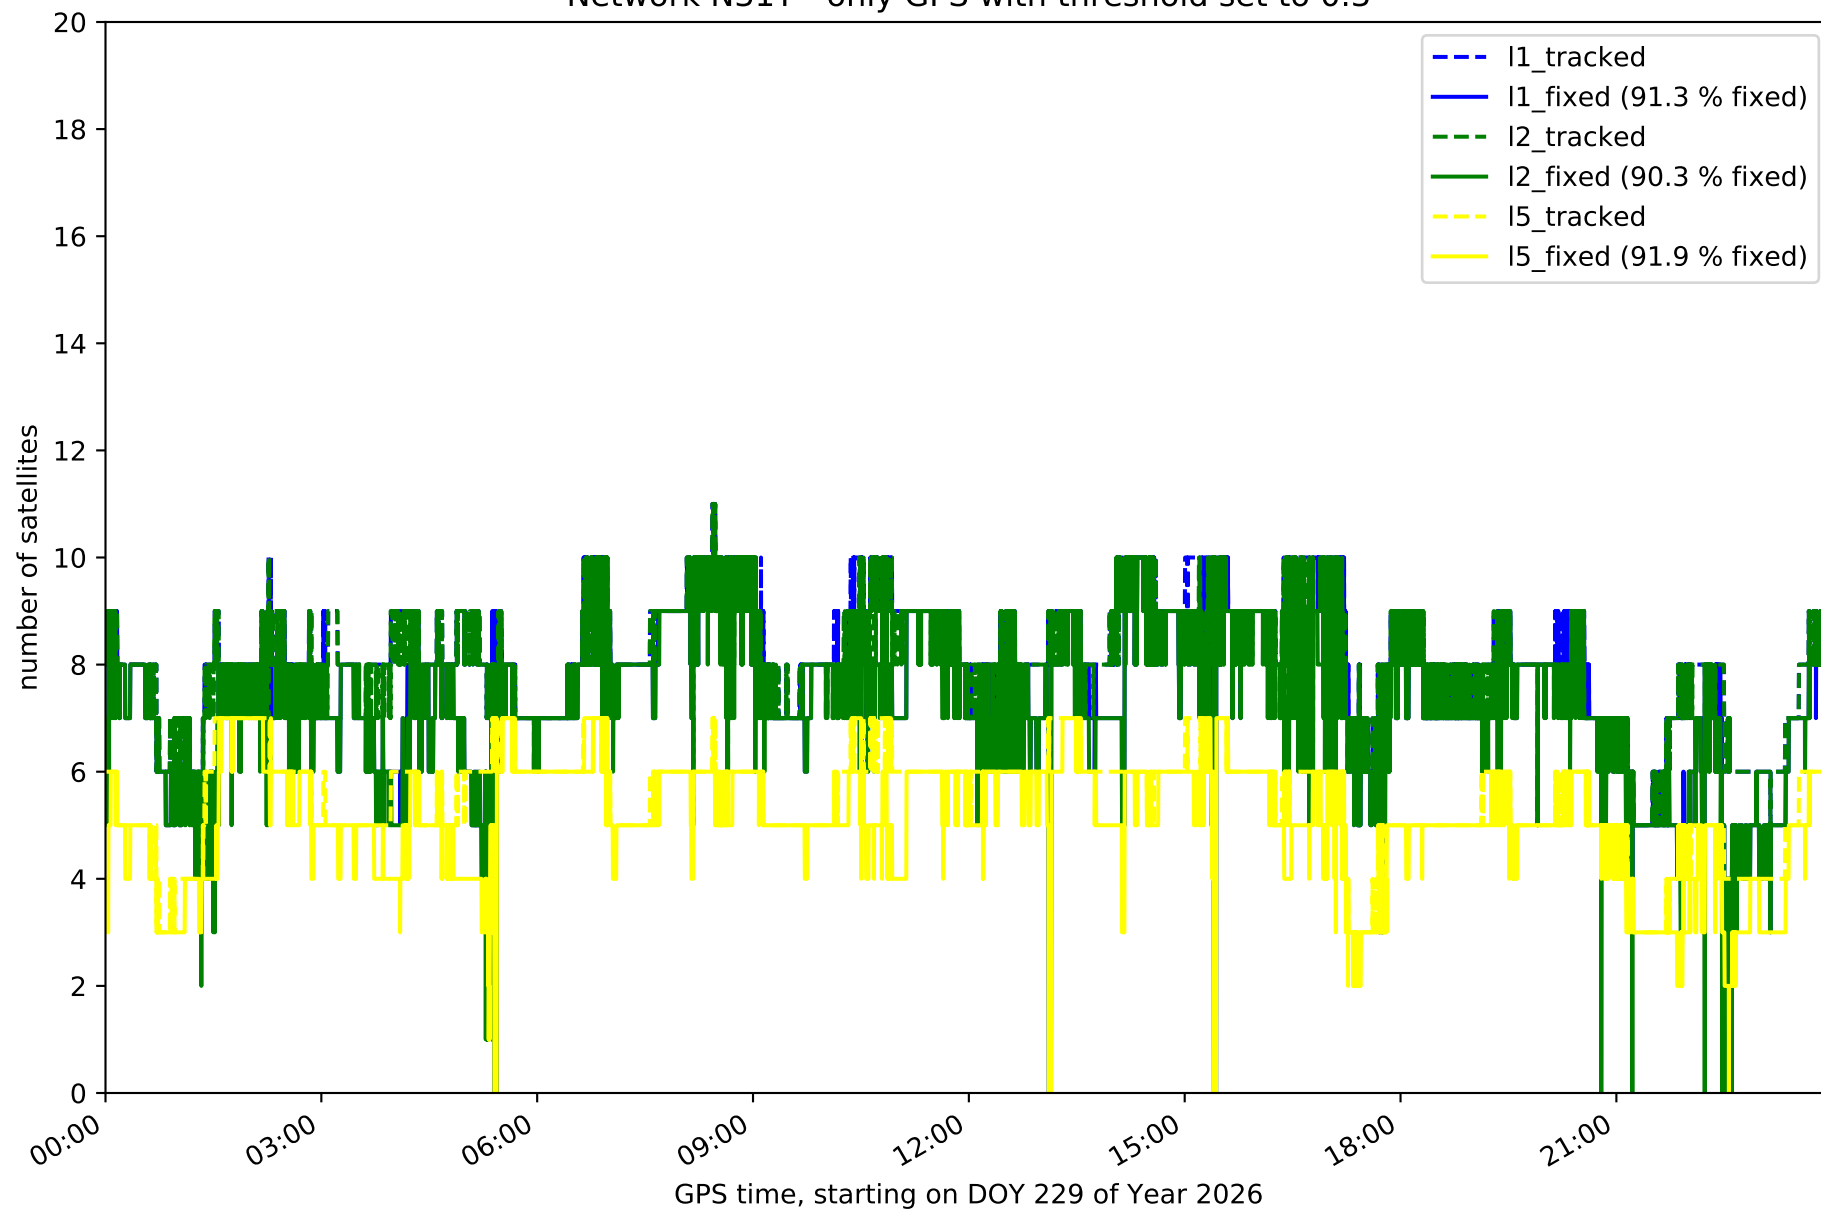


Network N31T - only GLONASS with threshold set to 0.3

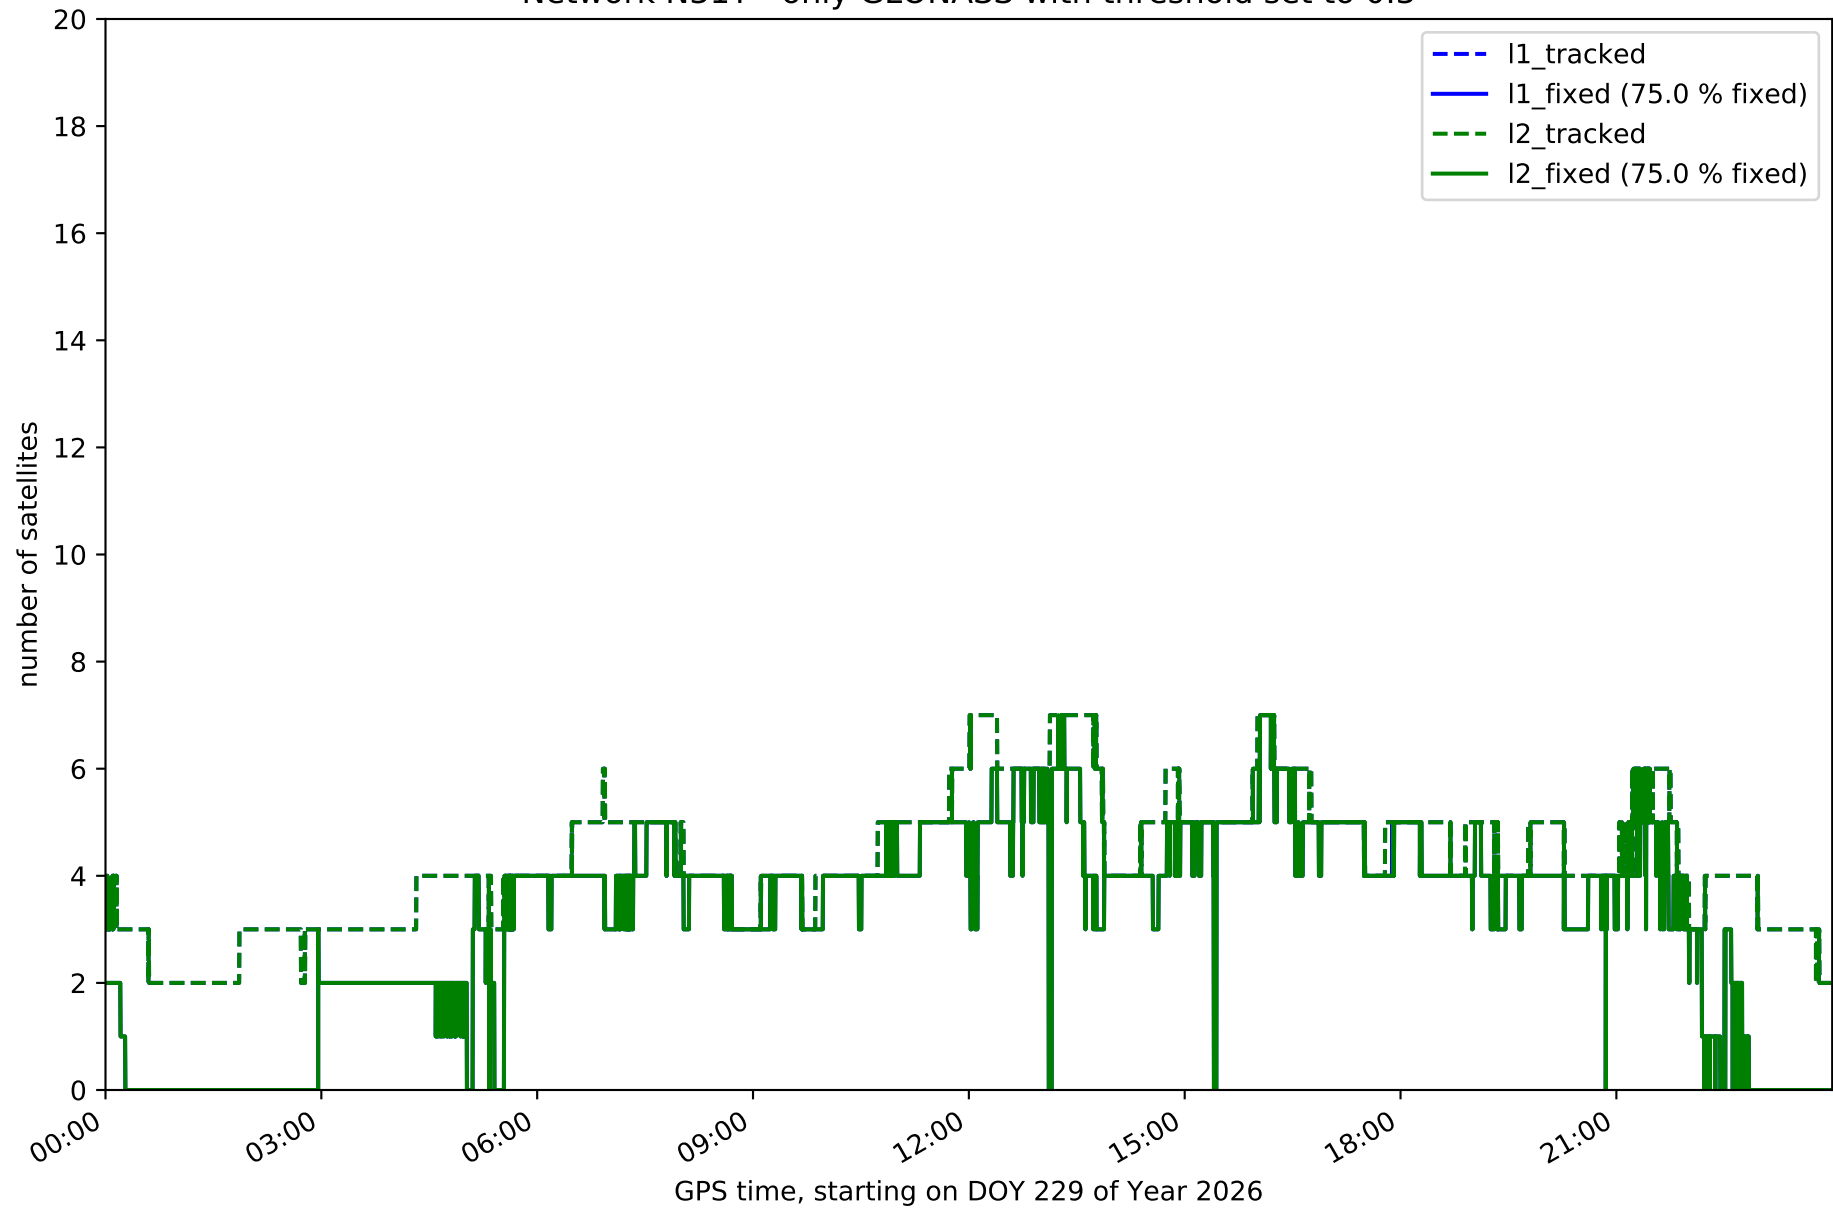


Network N31T - only BDS with threshold set to 0.3

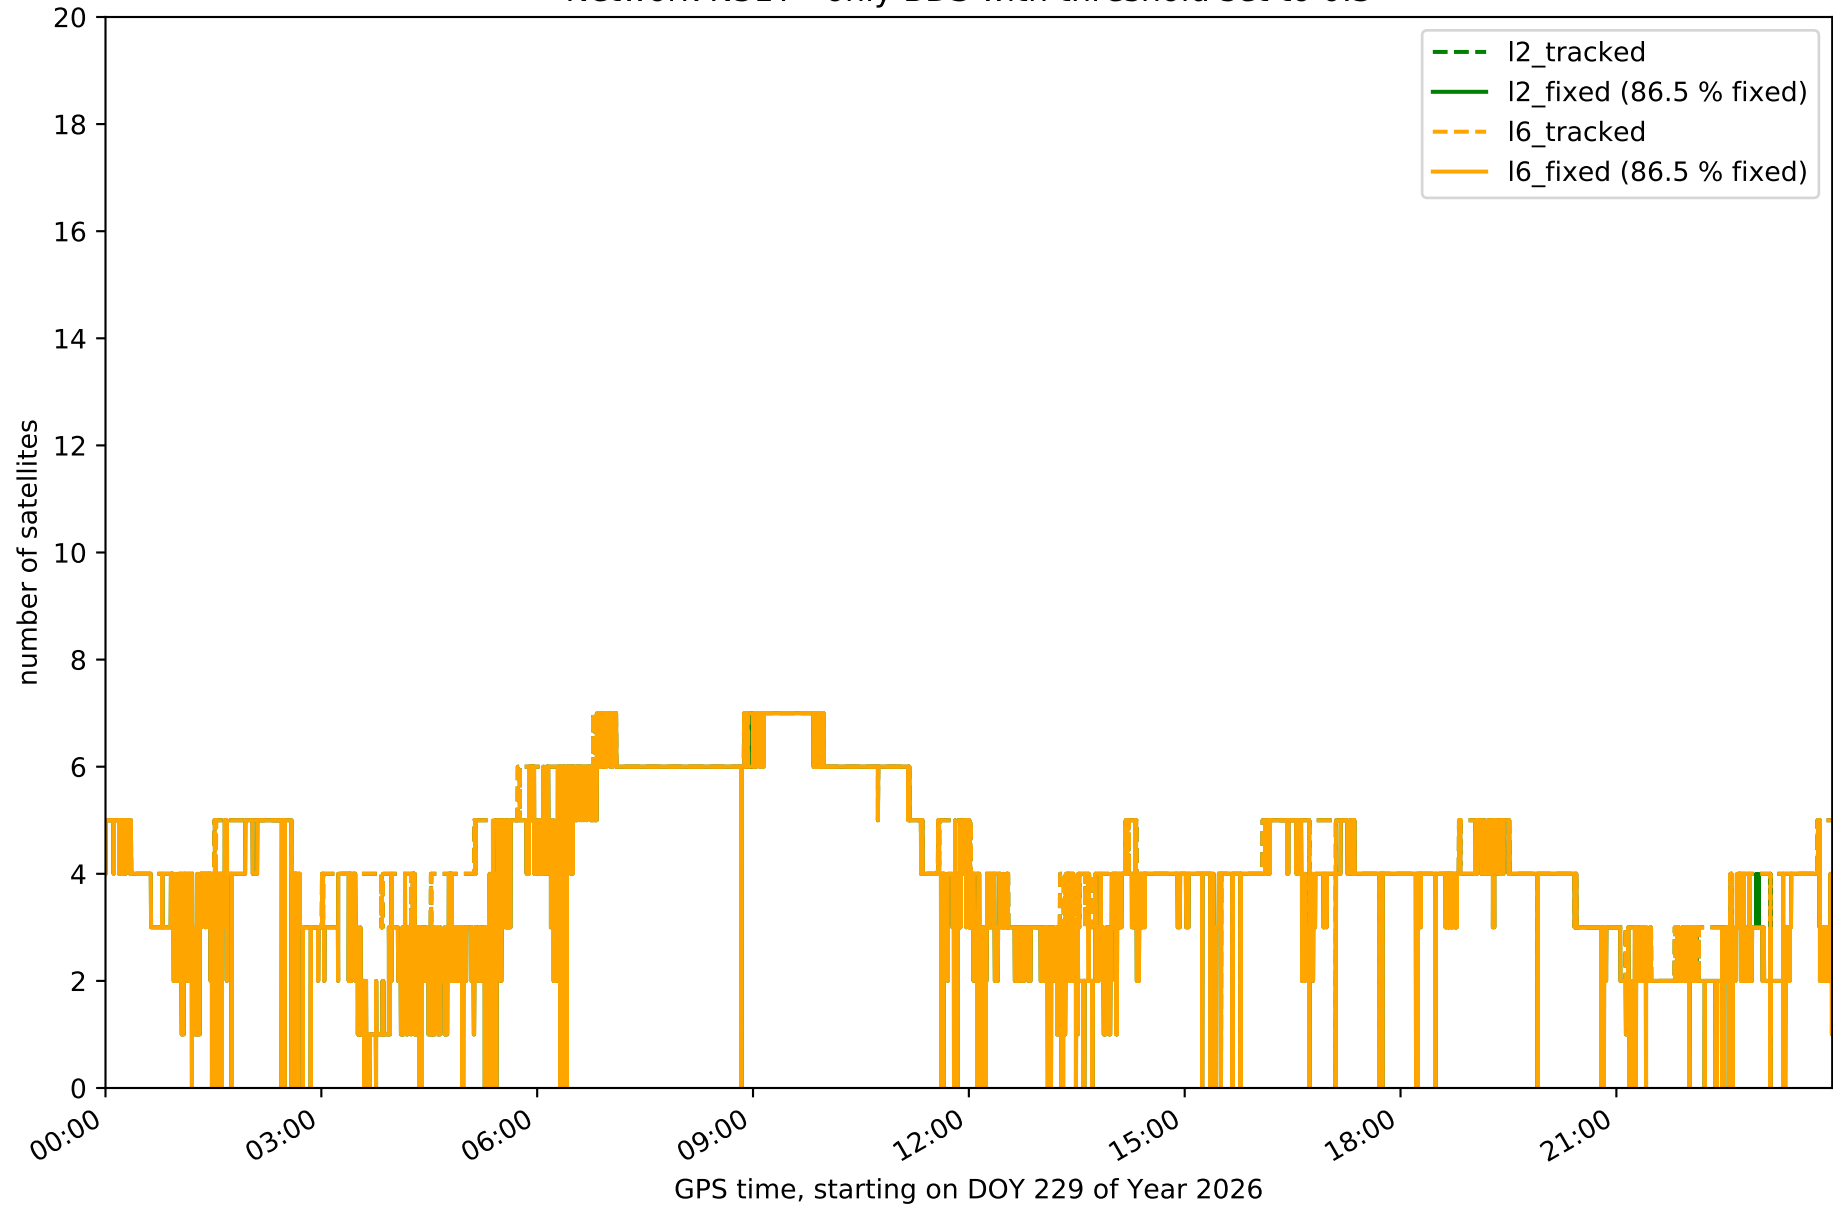


Network N31T - only Galileo with threshold set to 0.3

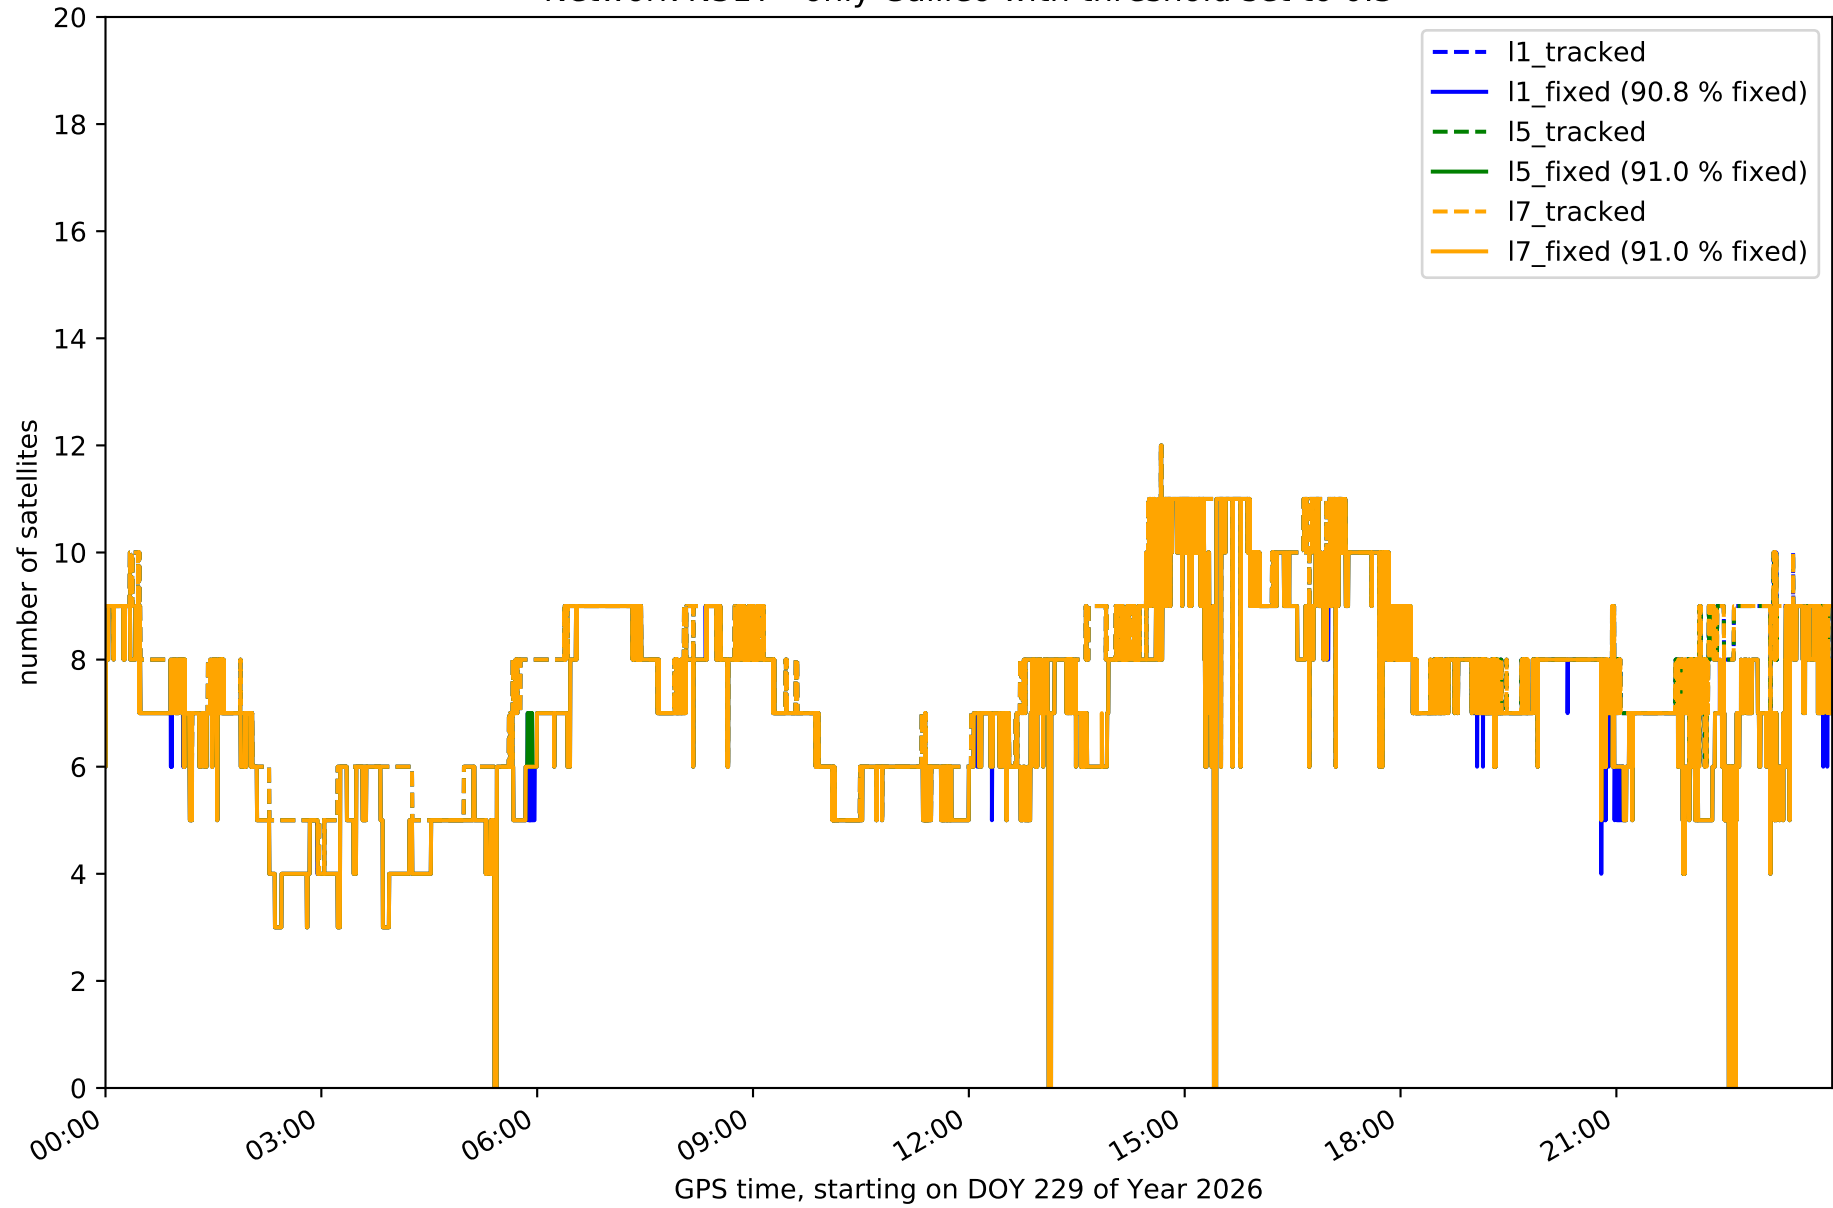


Station FUER in network N31T

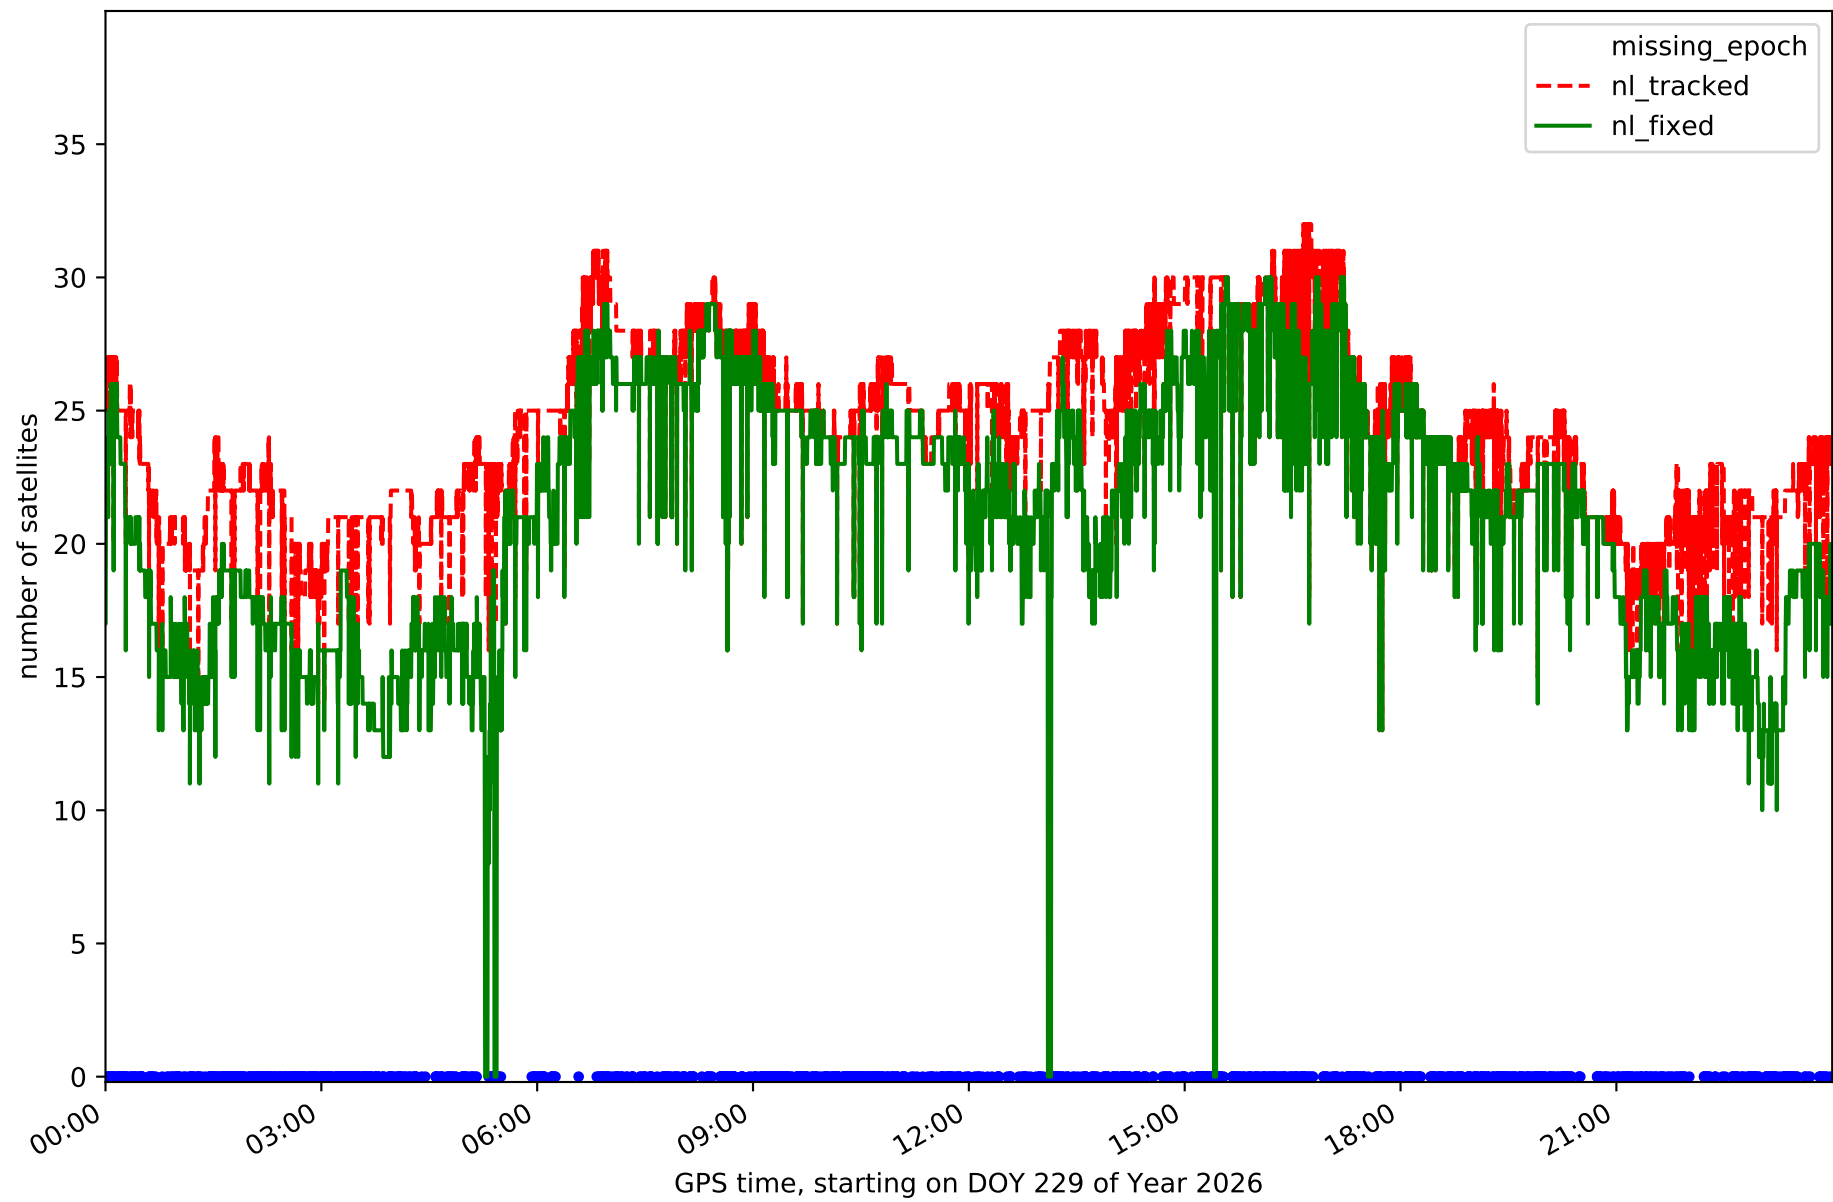


Station LALA in network N31T

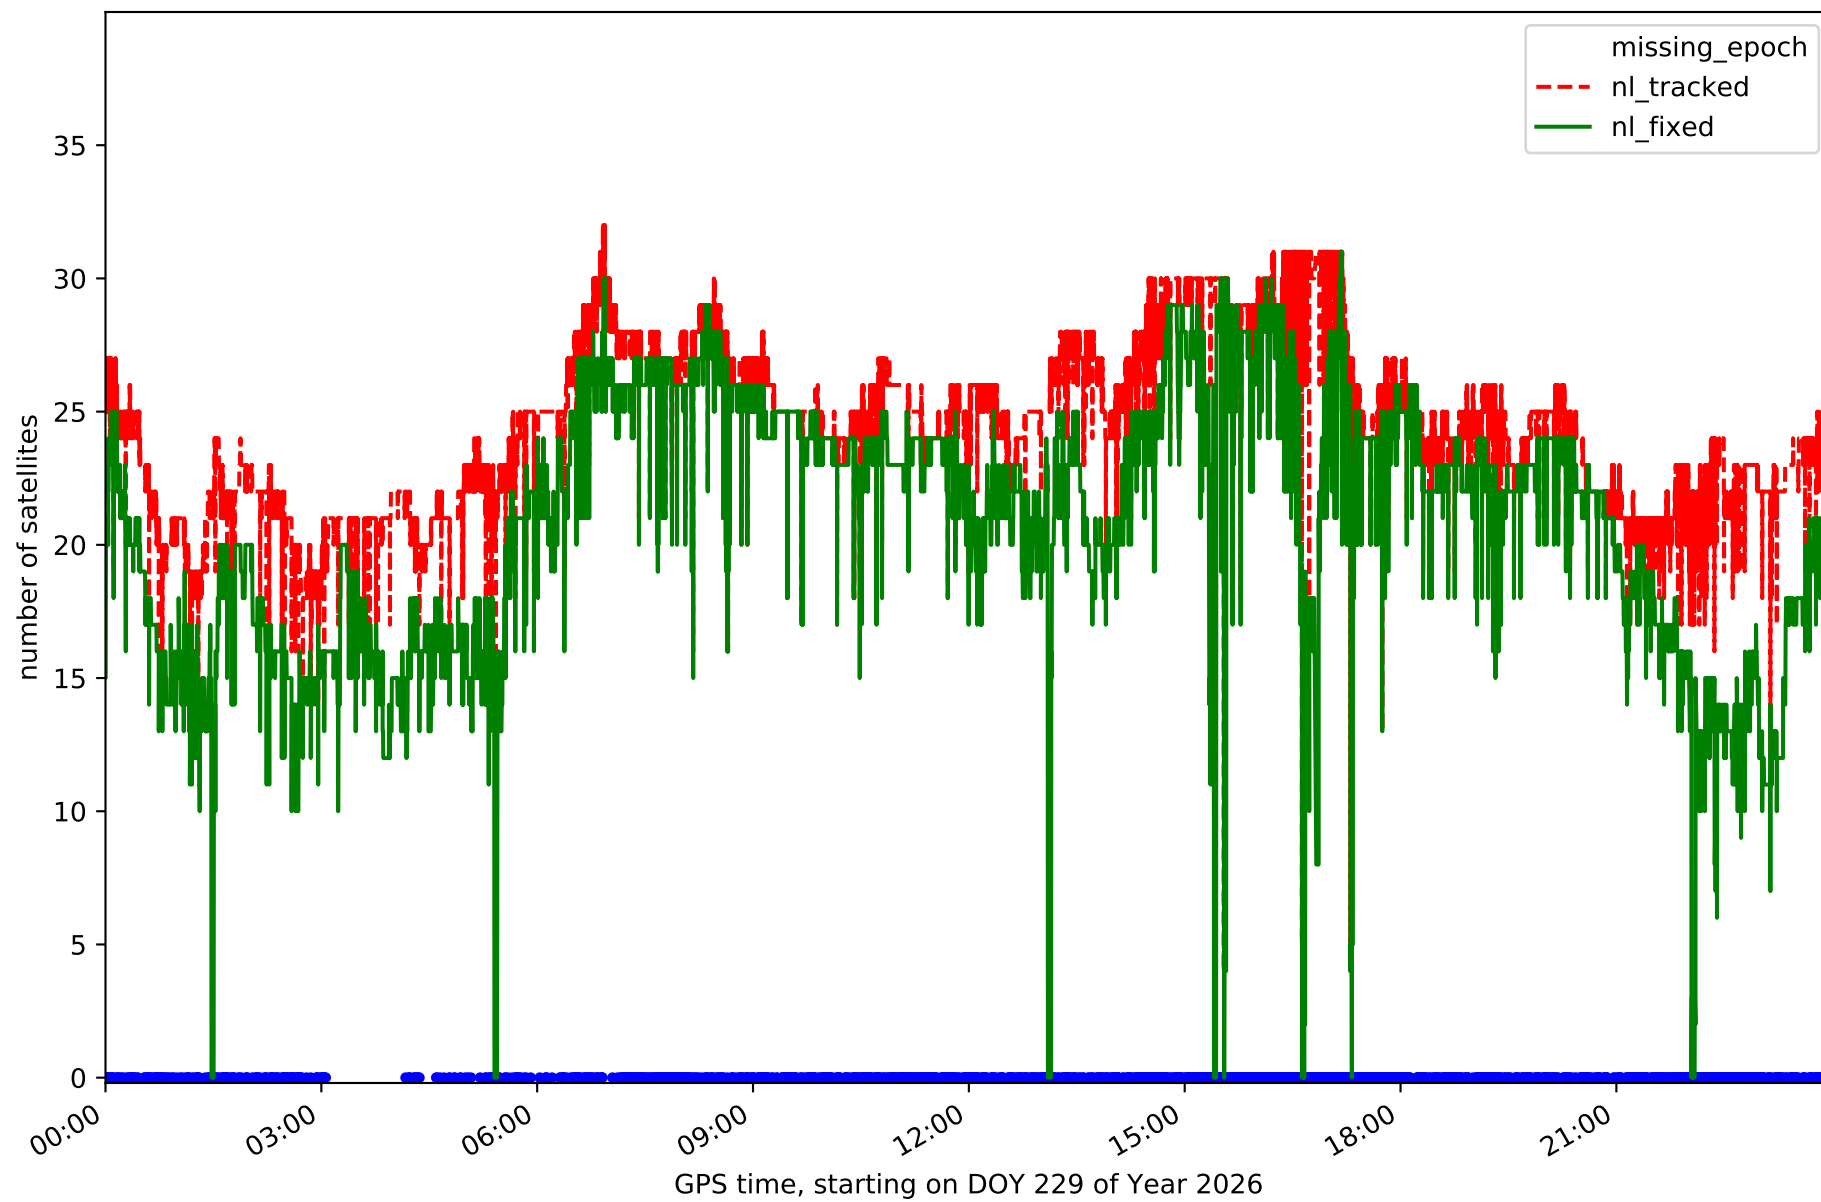


Station LZ01 in network N31T

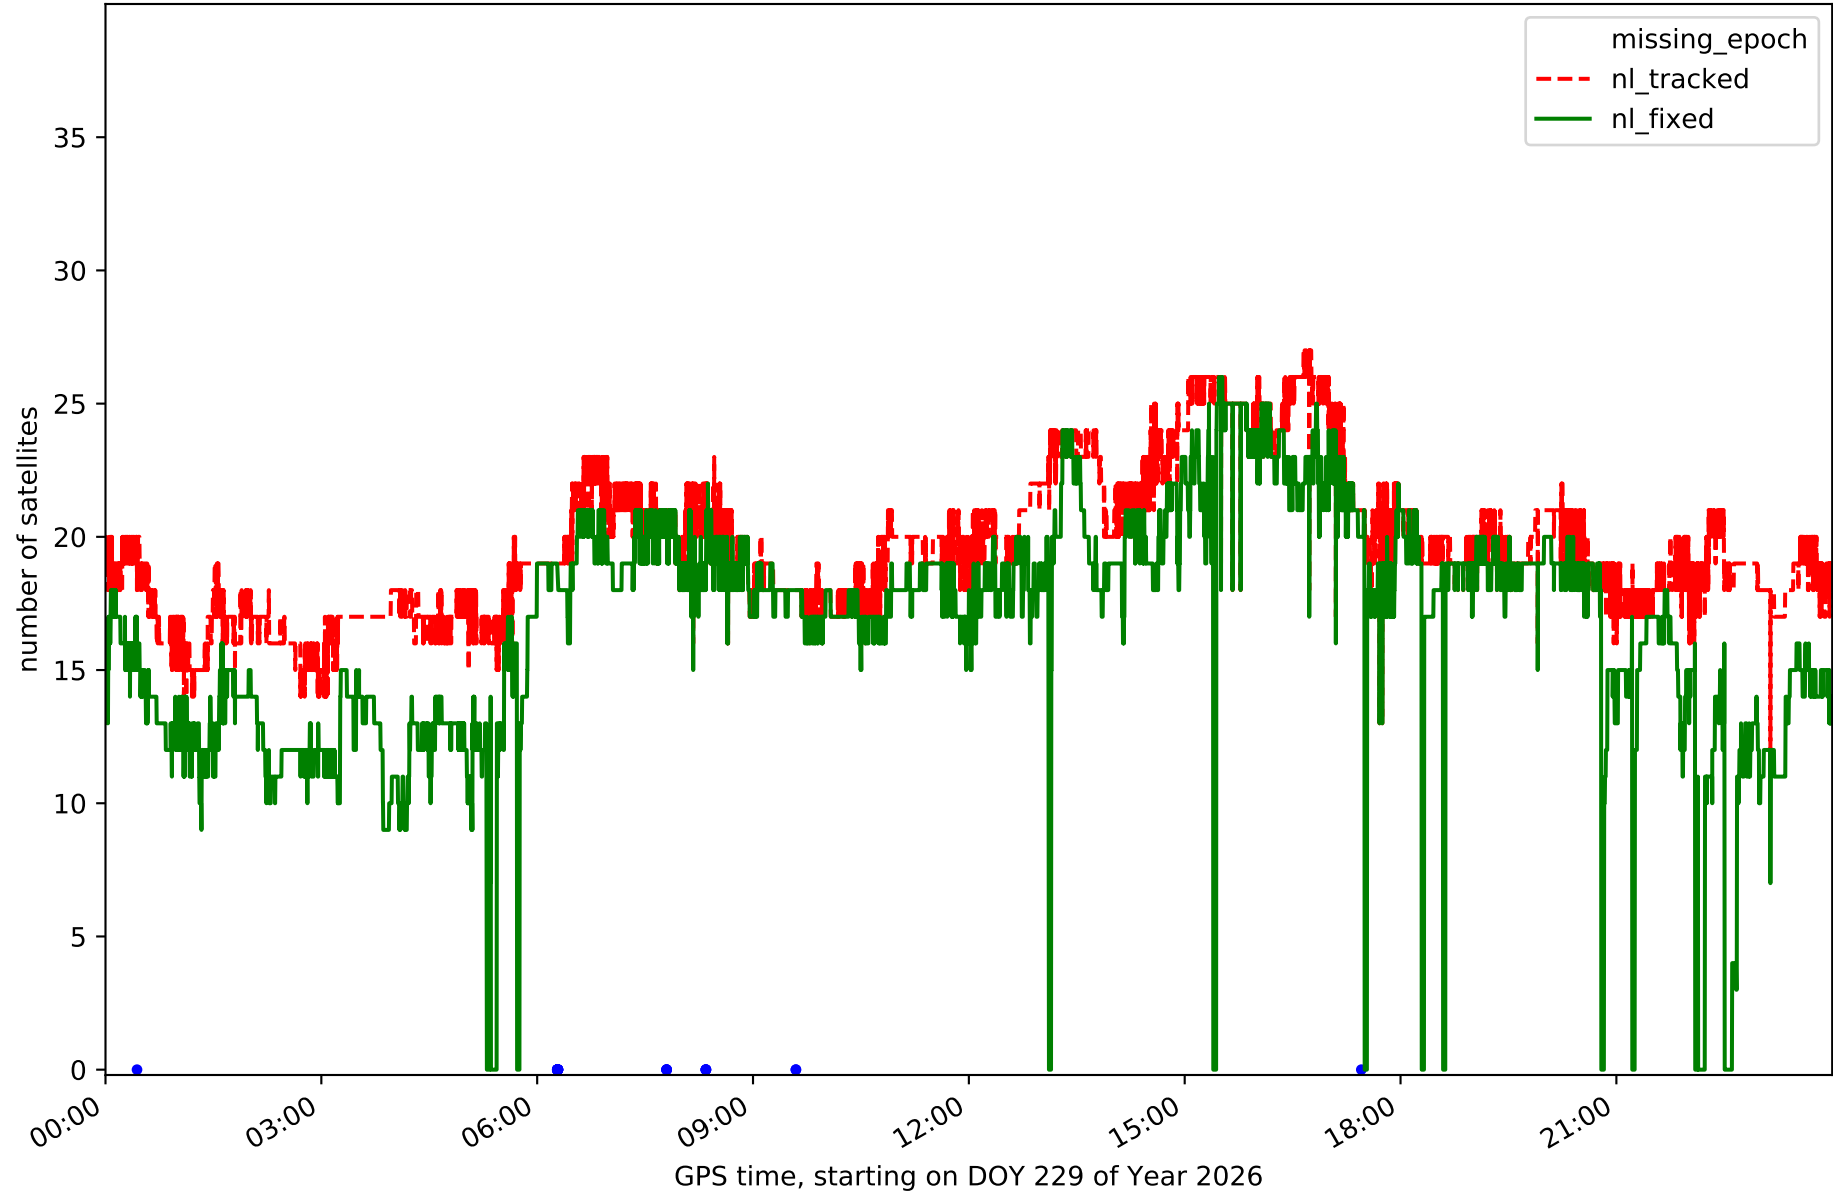


Station LZ02 in network N31T

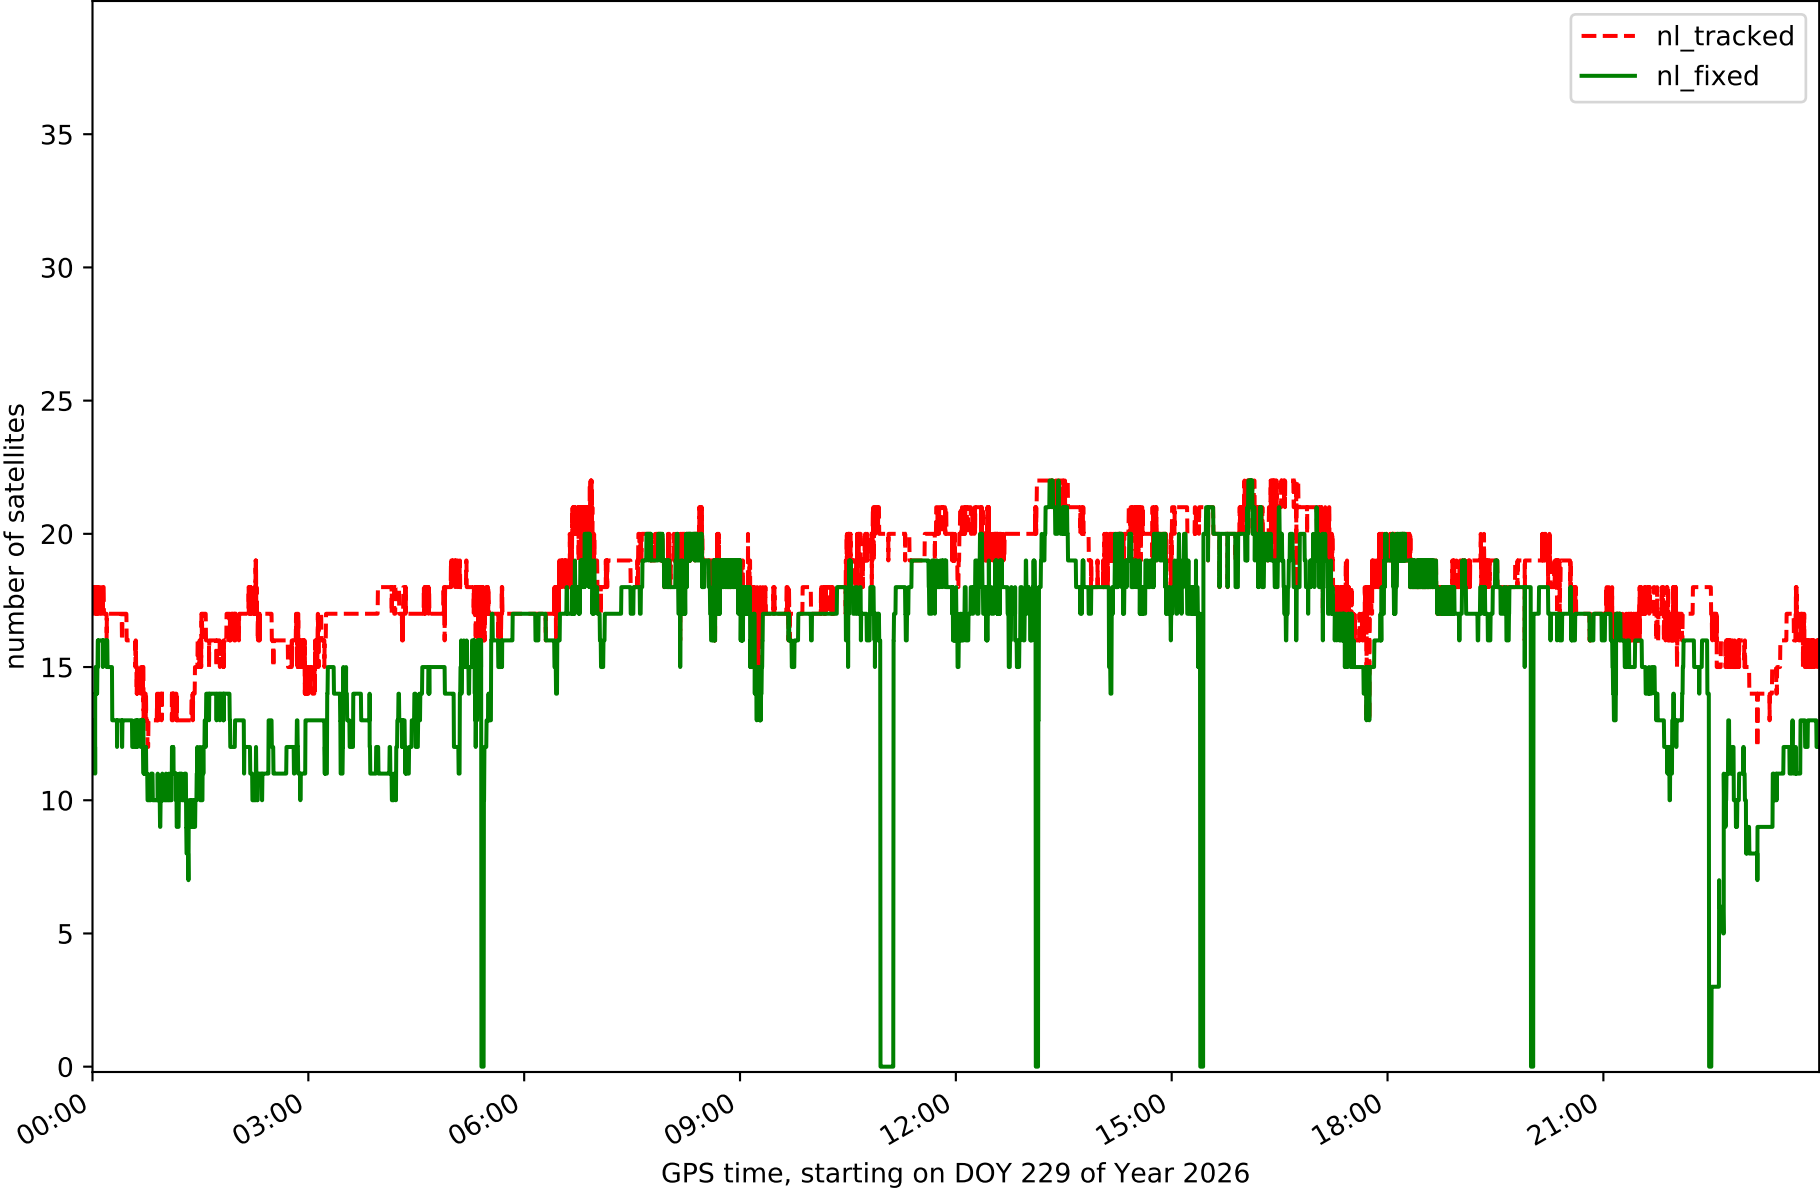


Station LZ03 in network N31T

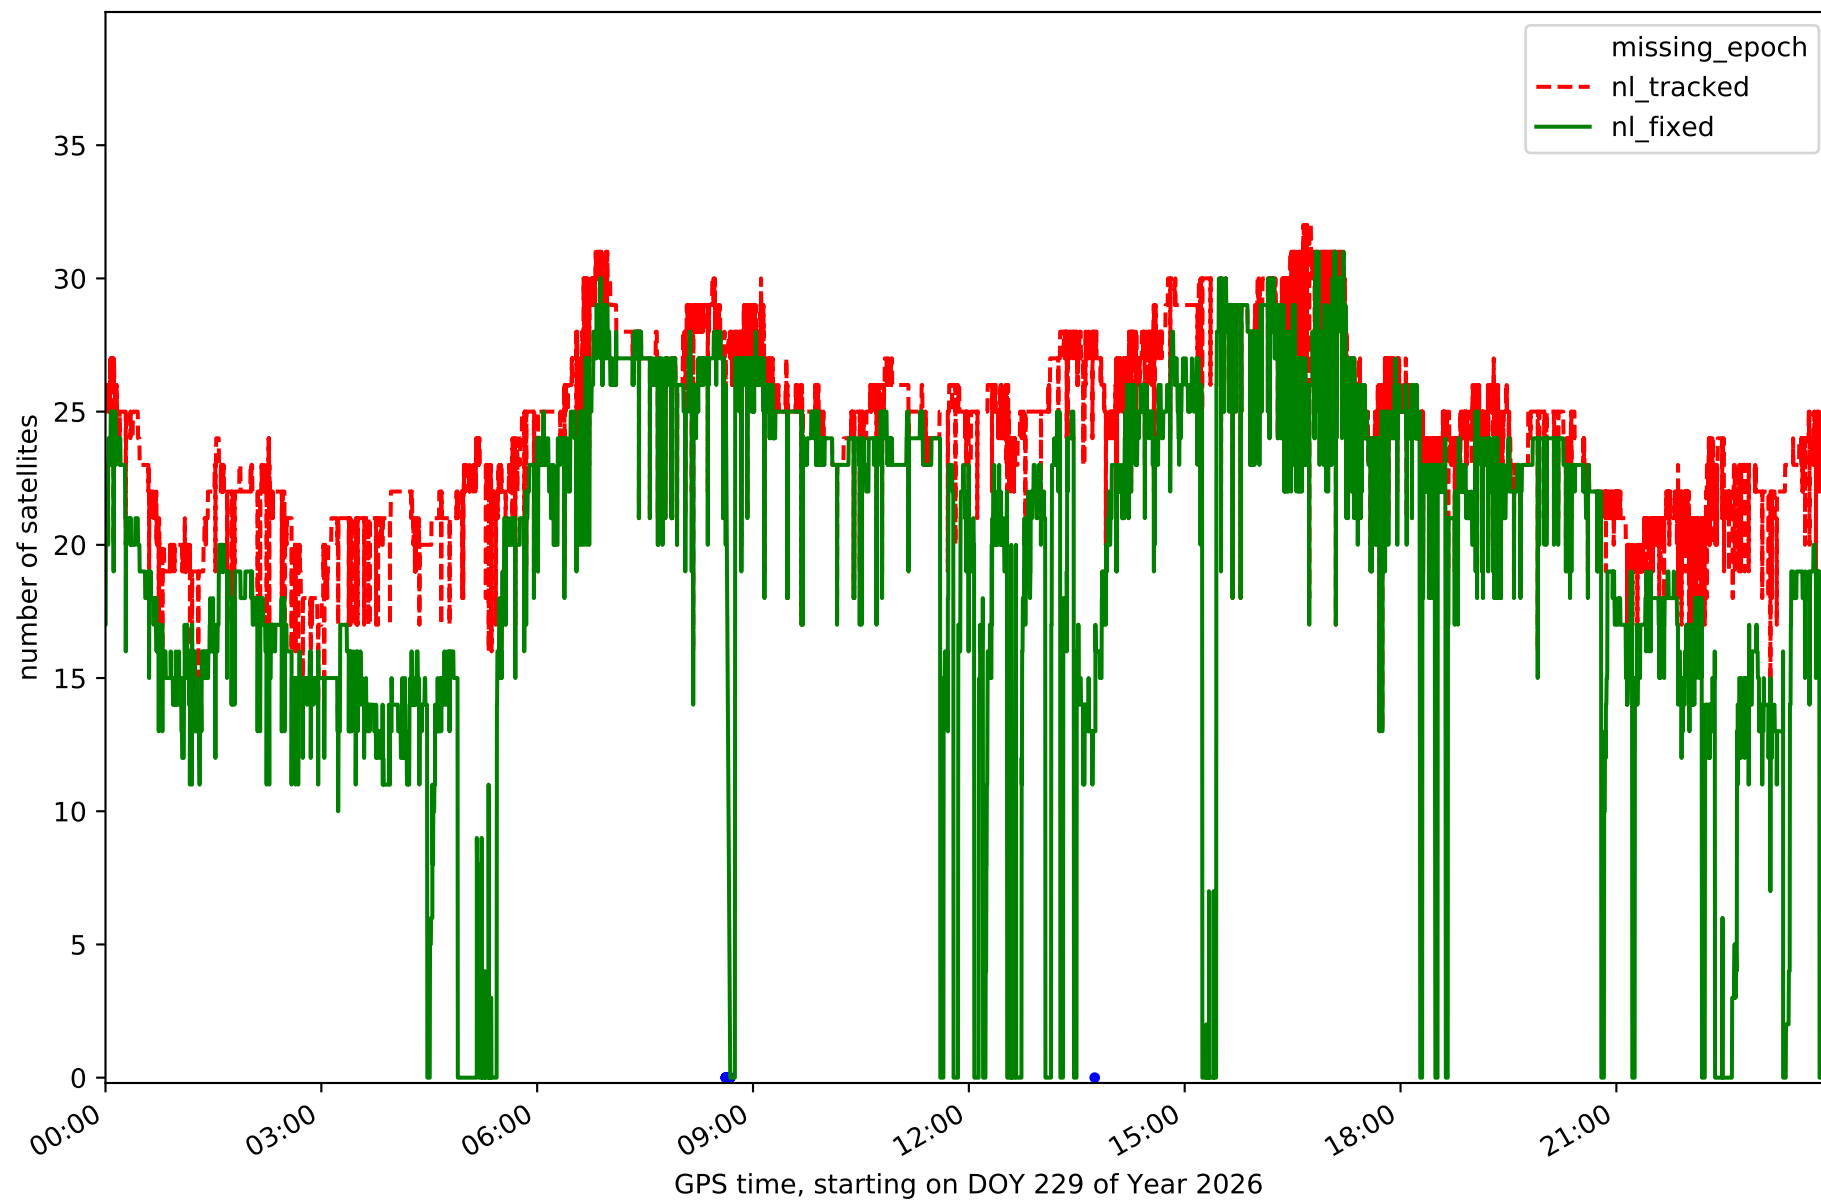


Station MASP in network N31T

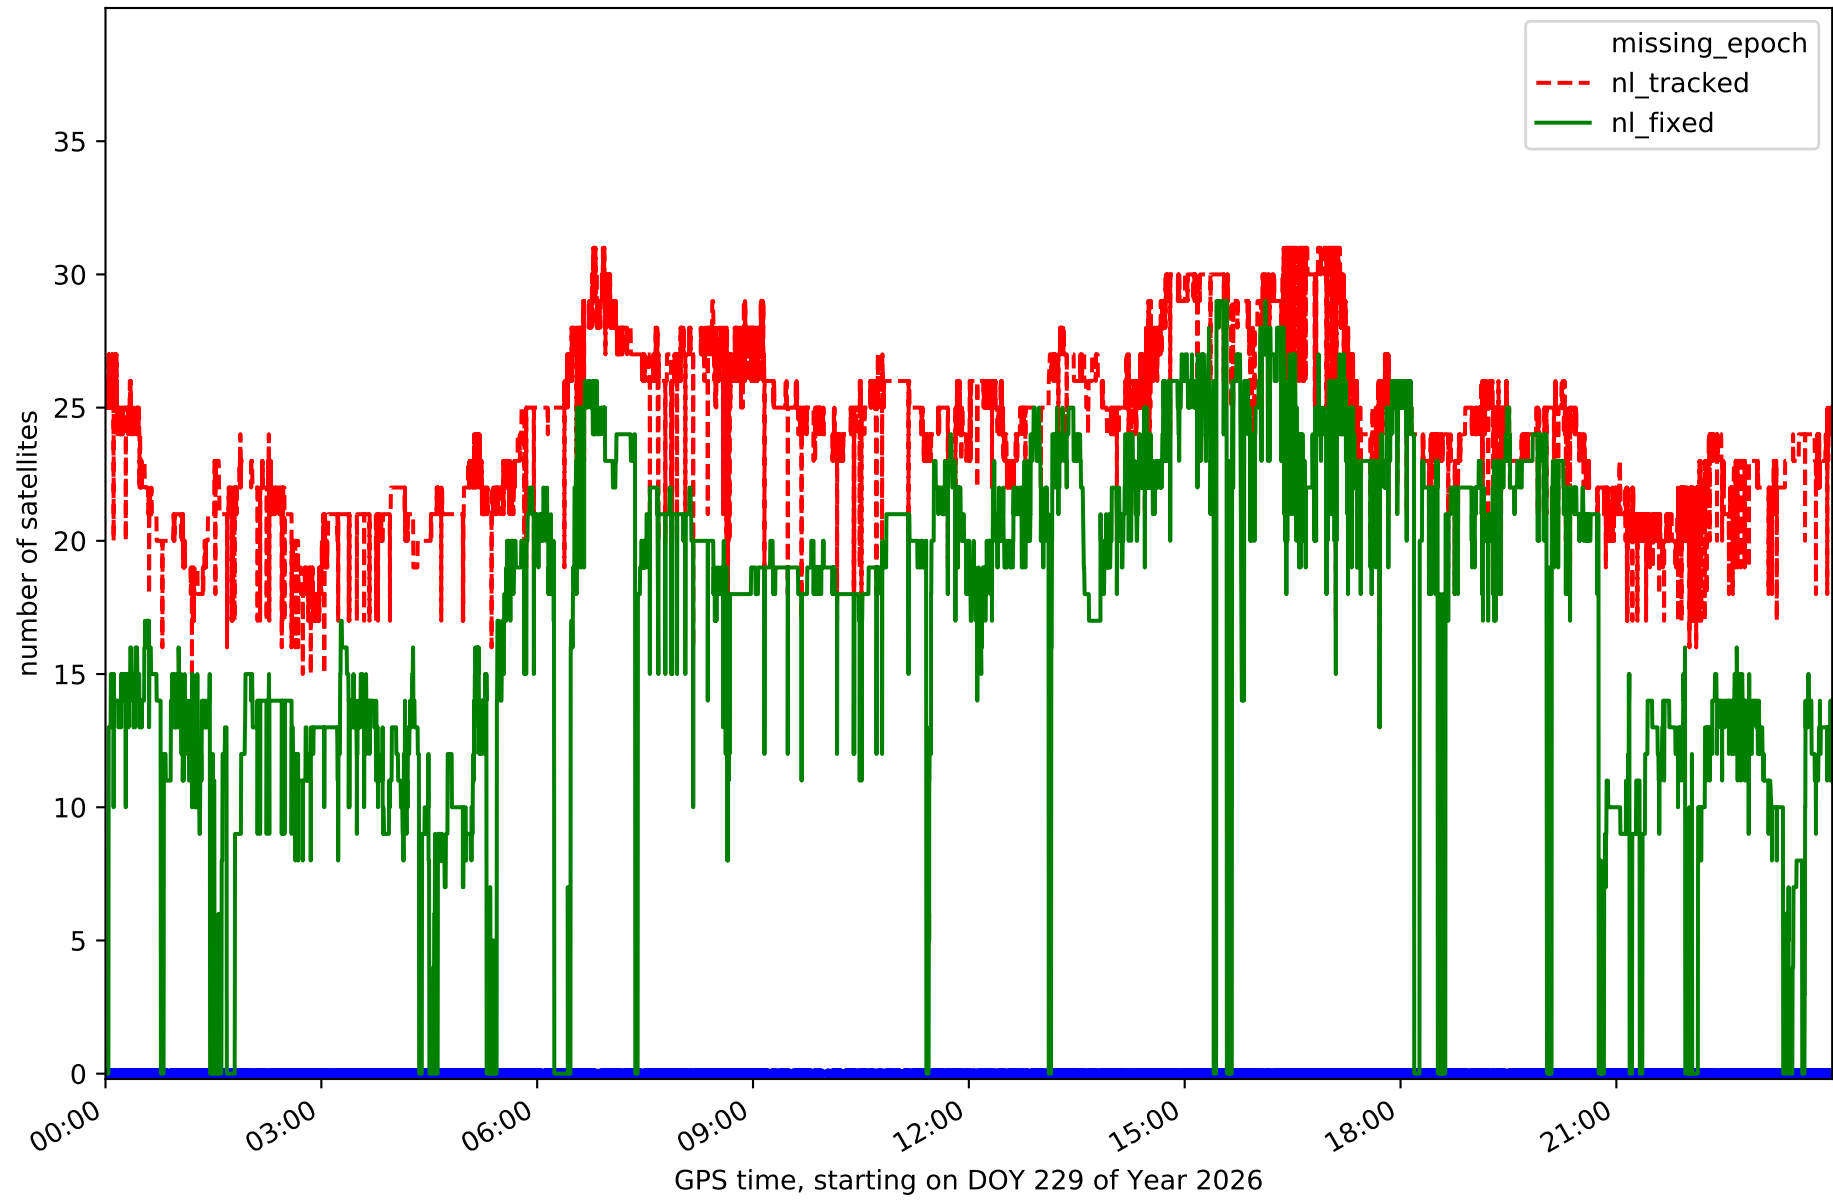


Station ULP2 in network N31T

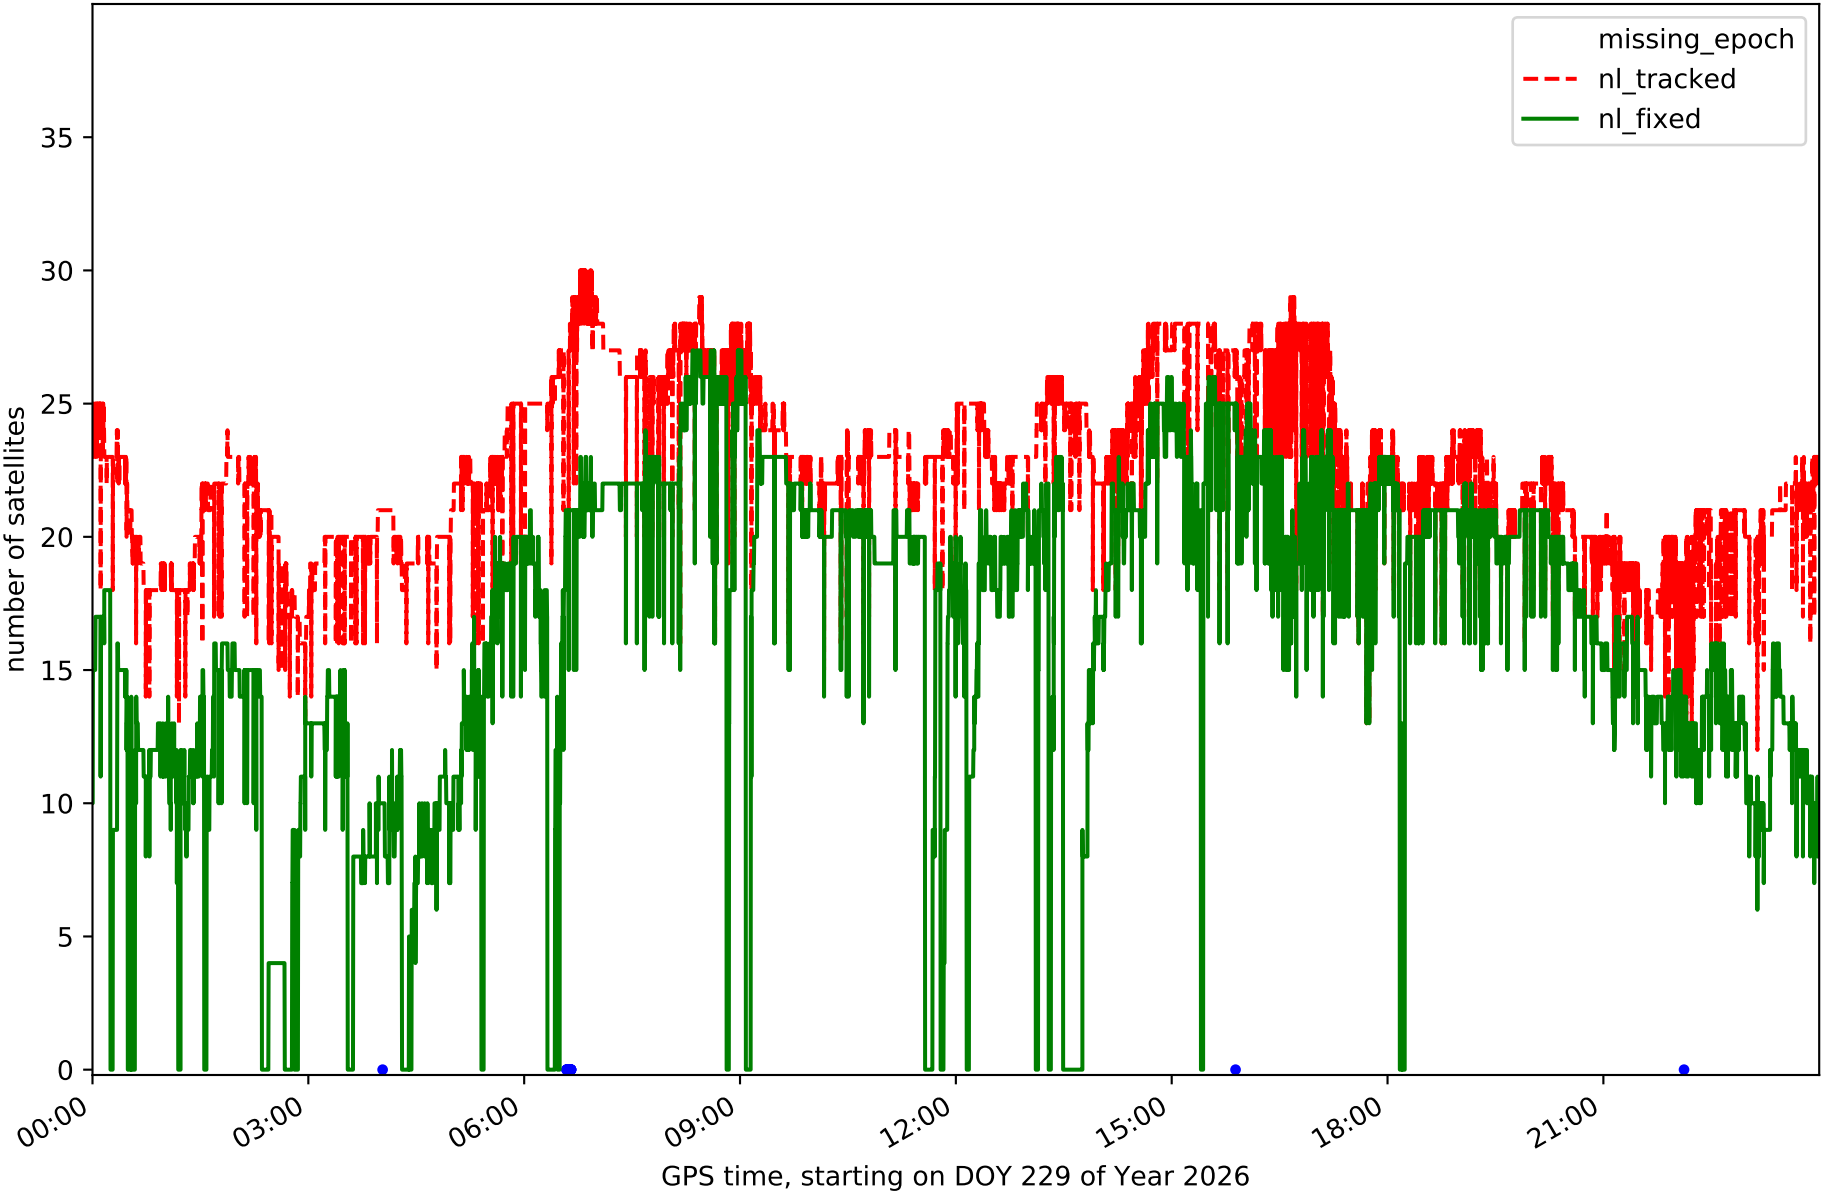


RefCheck for station FUER in network N31T

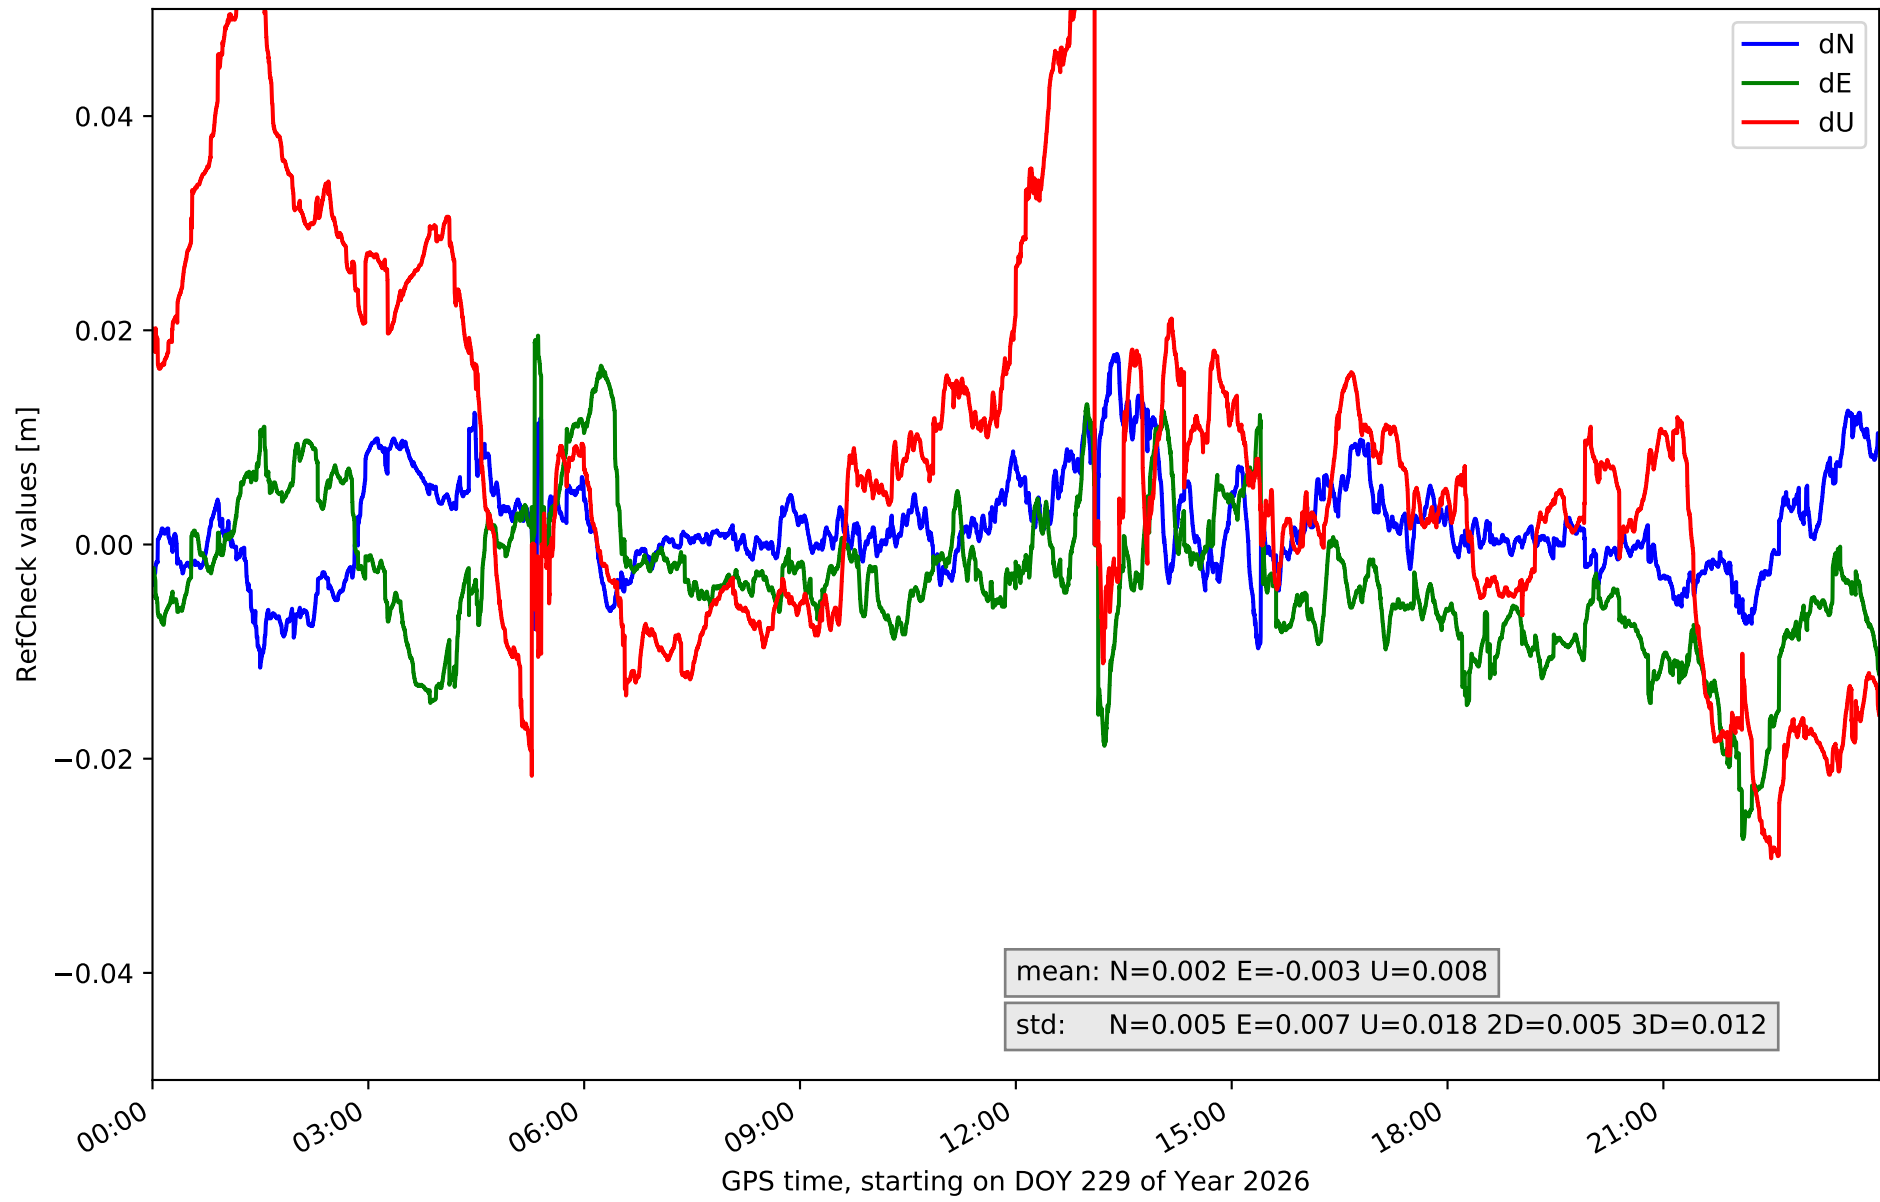


RefCheck for station LALA in network N31T

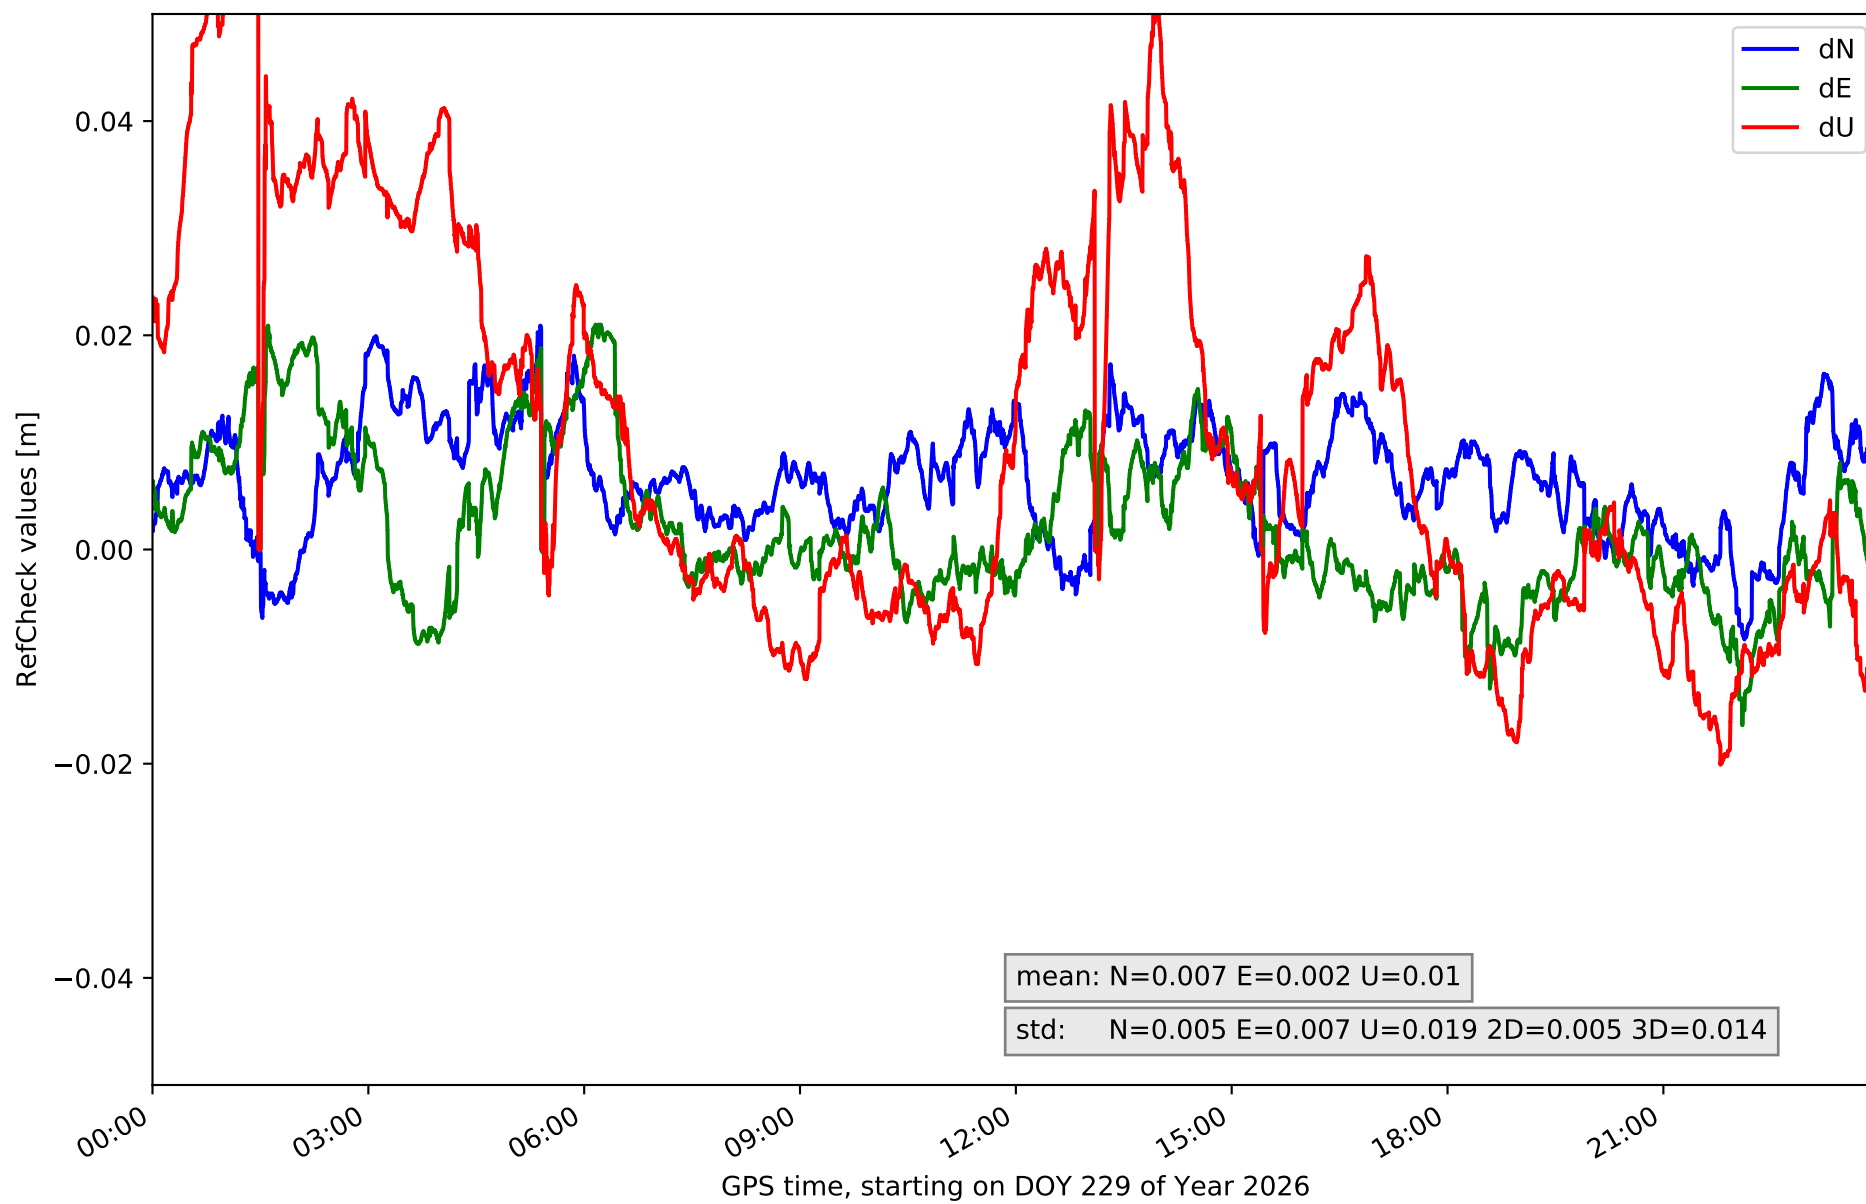


RefCheck for station LZ01 in network N31T

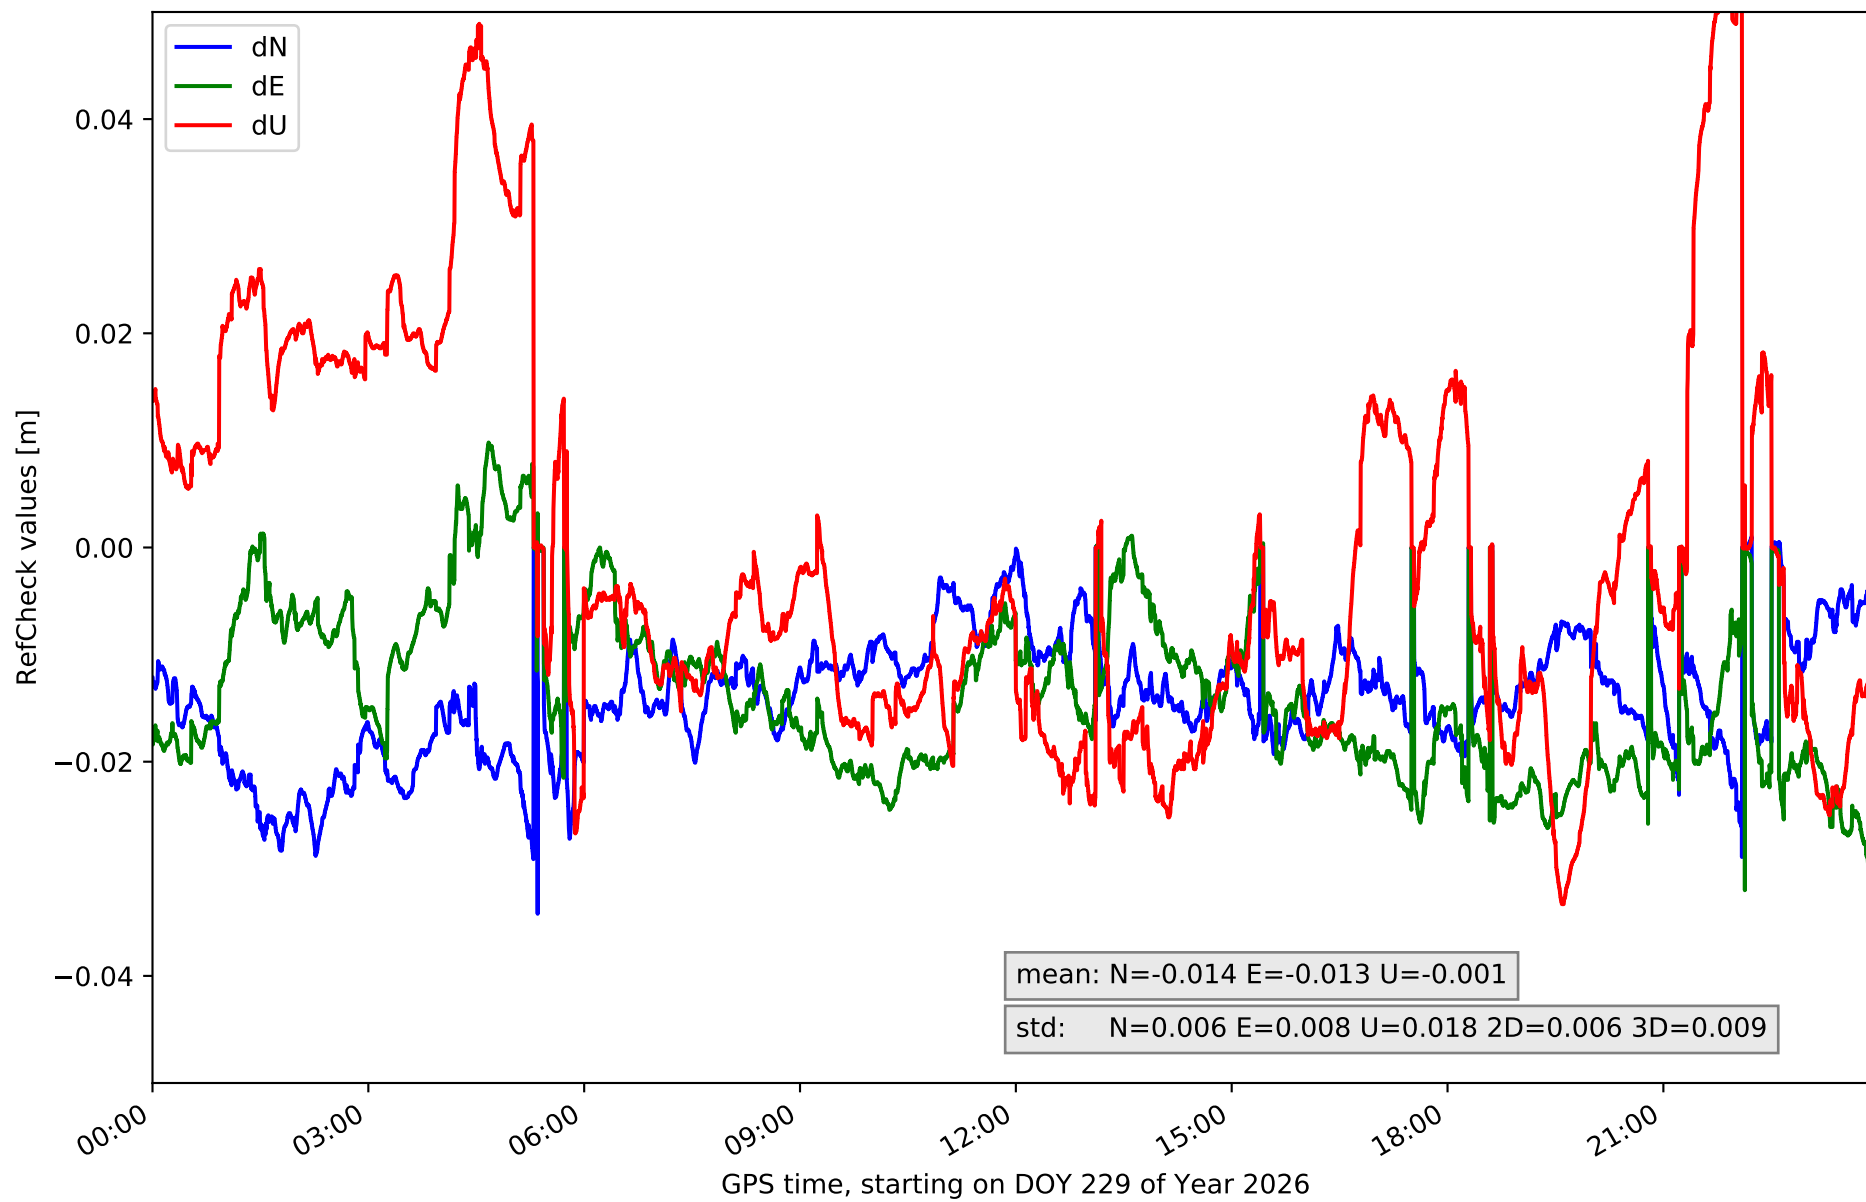


RefCheck for station LZ02 in network N31T

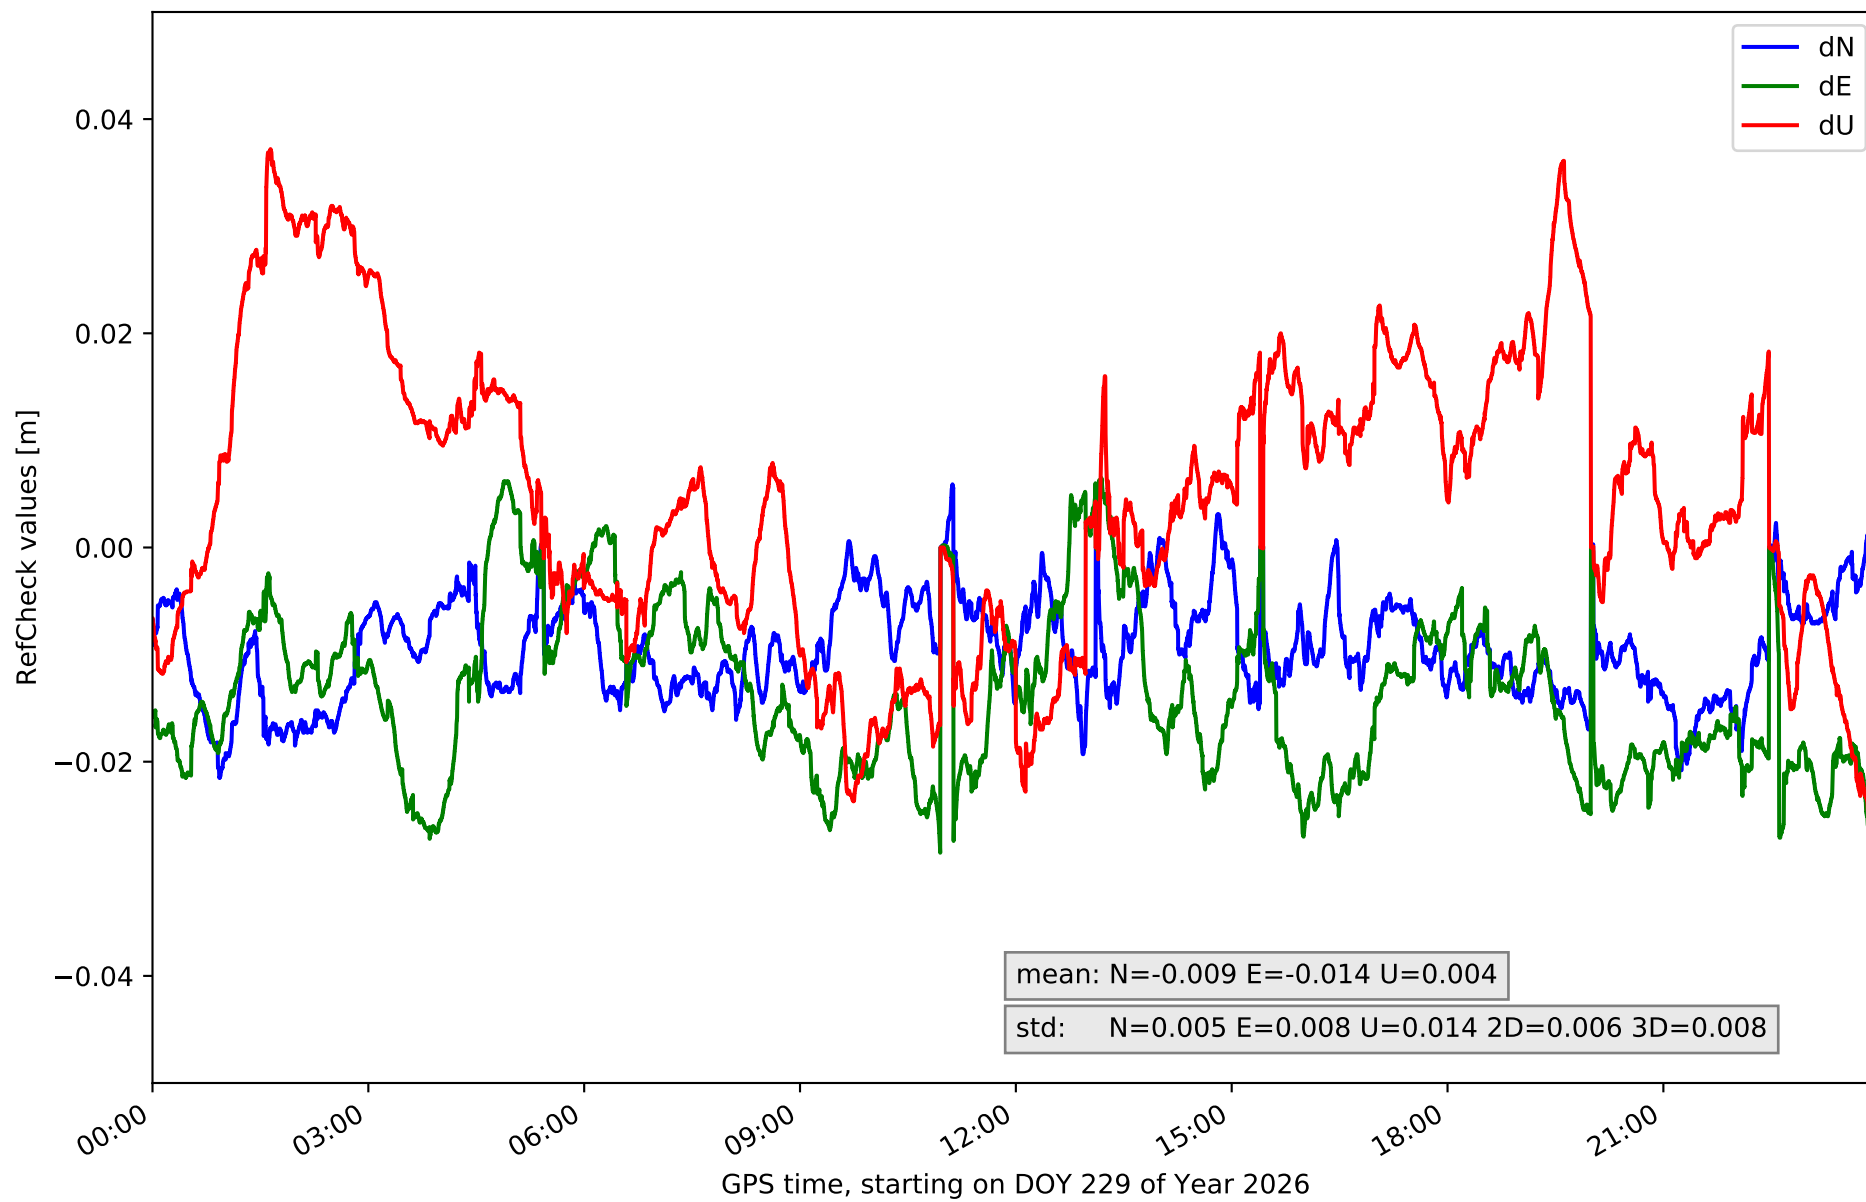


RefCheck for station LZ03 in network N31T

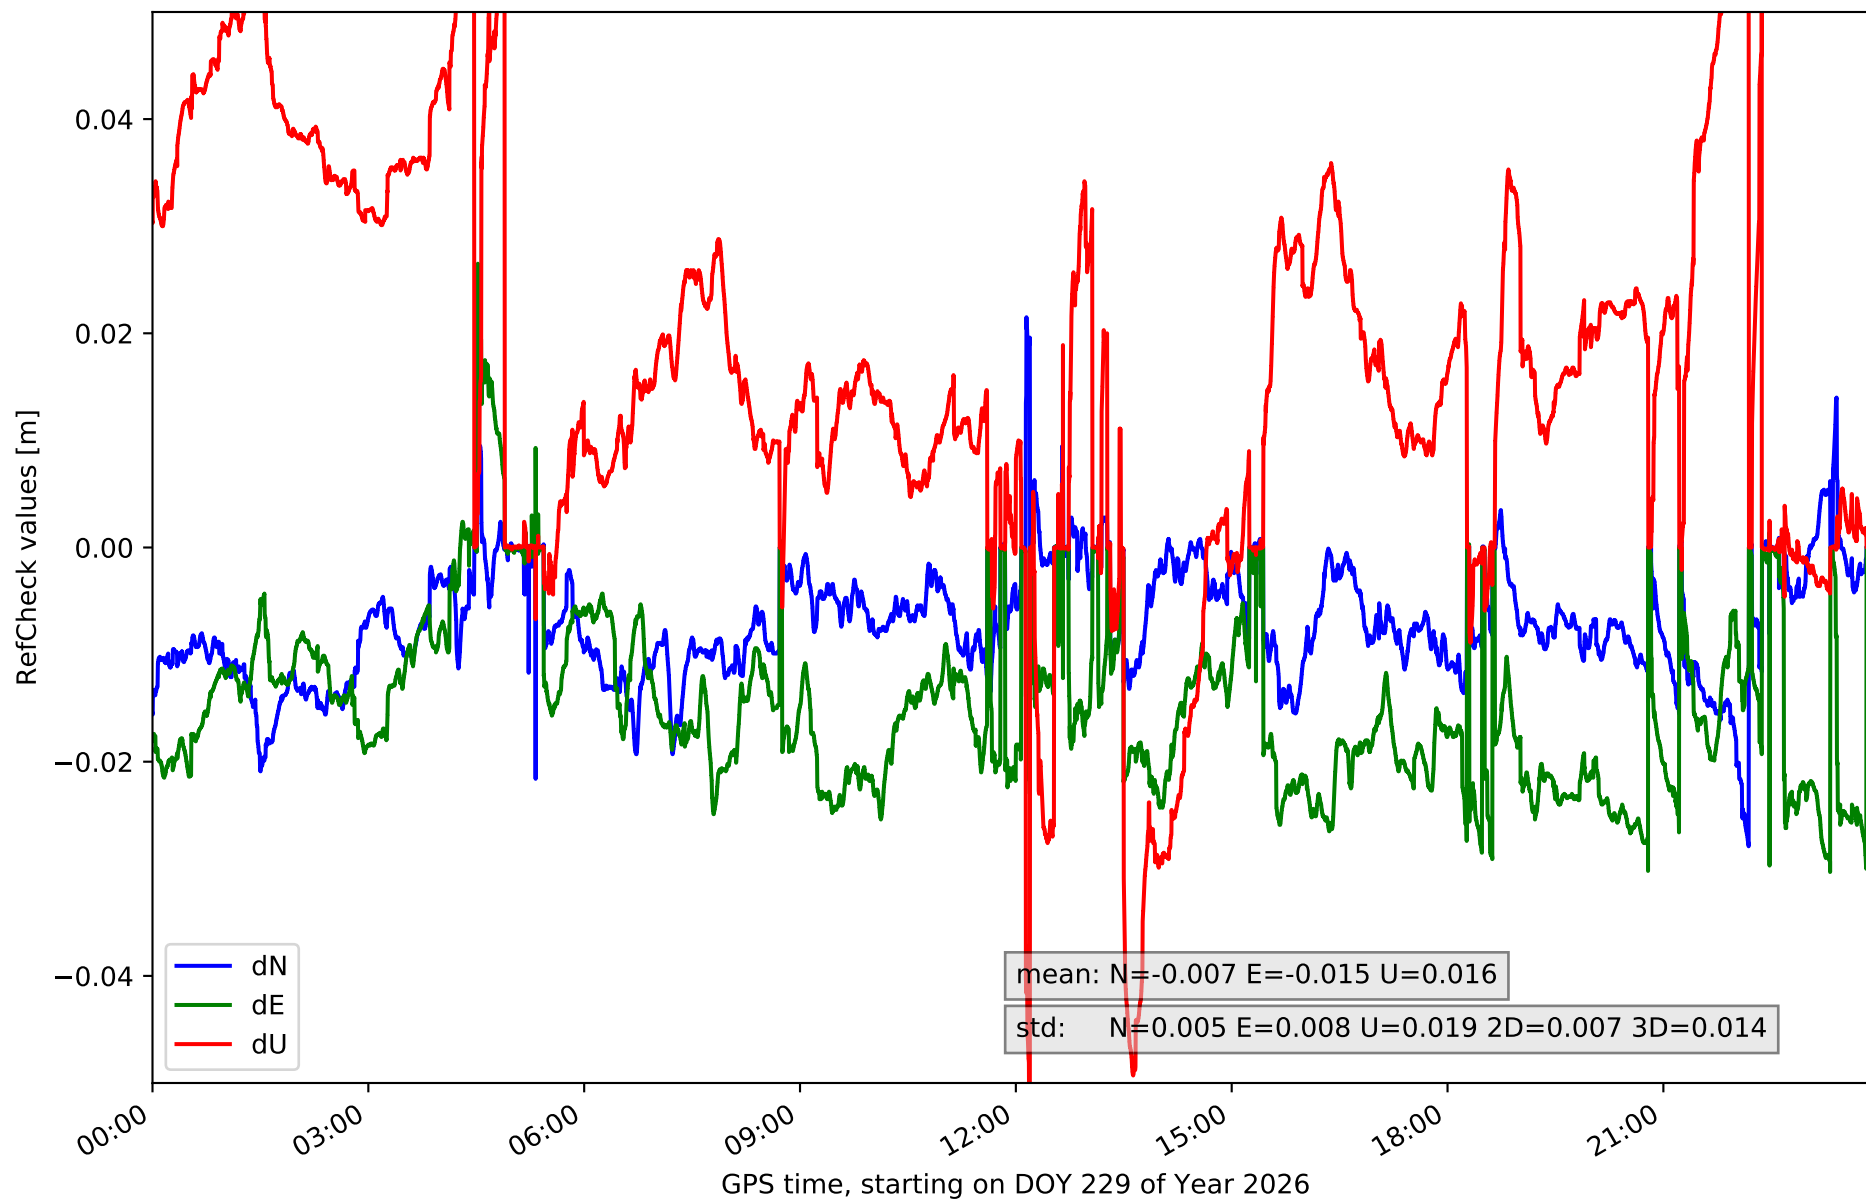

RefCheck for station MASP in network N31T

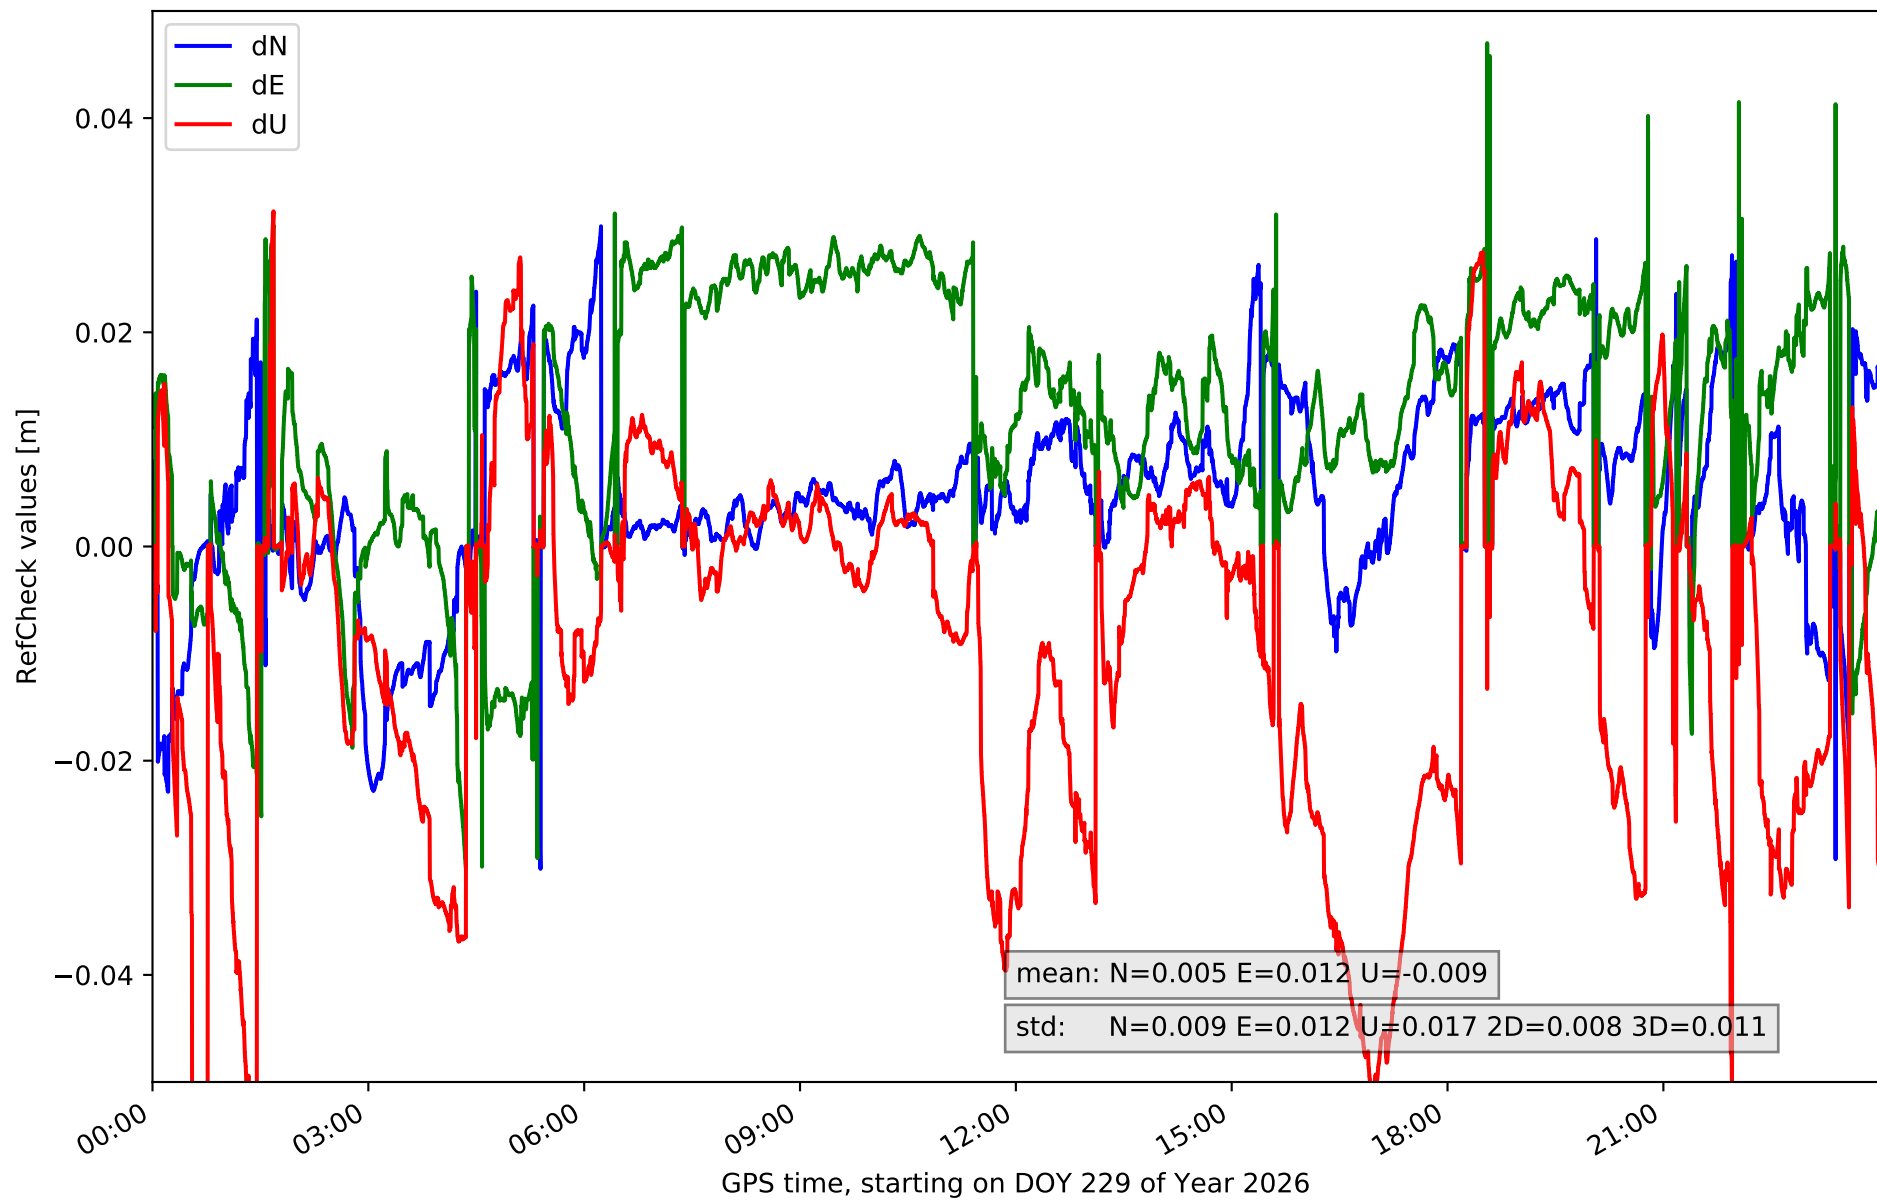

RefCheck for station ULP2 in network N31T

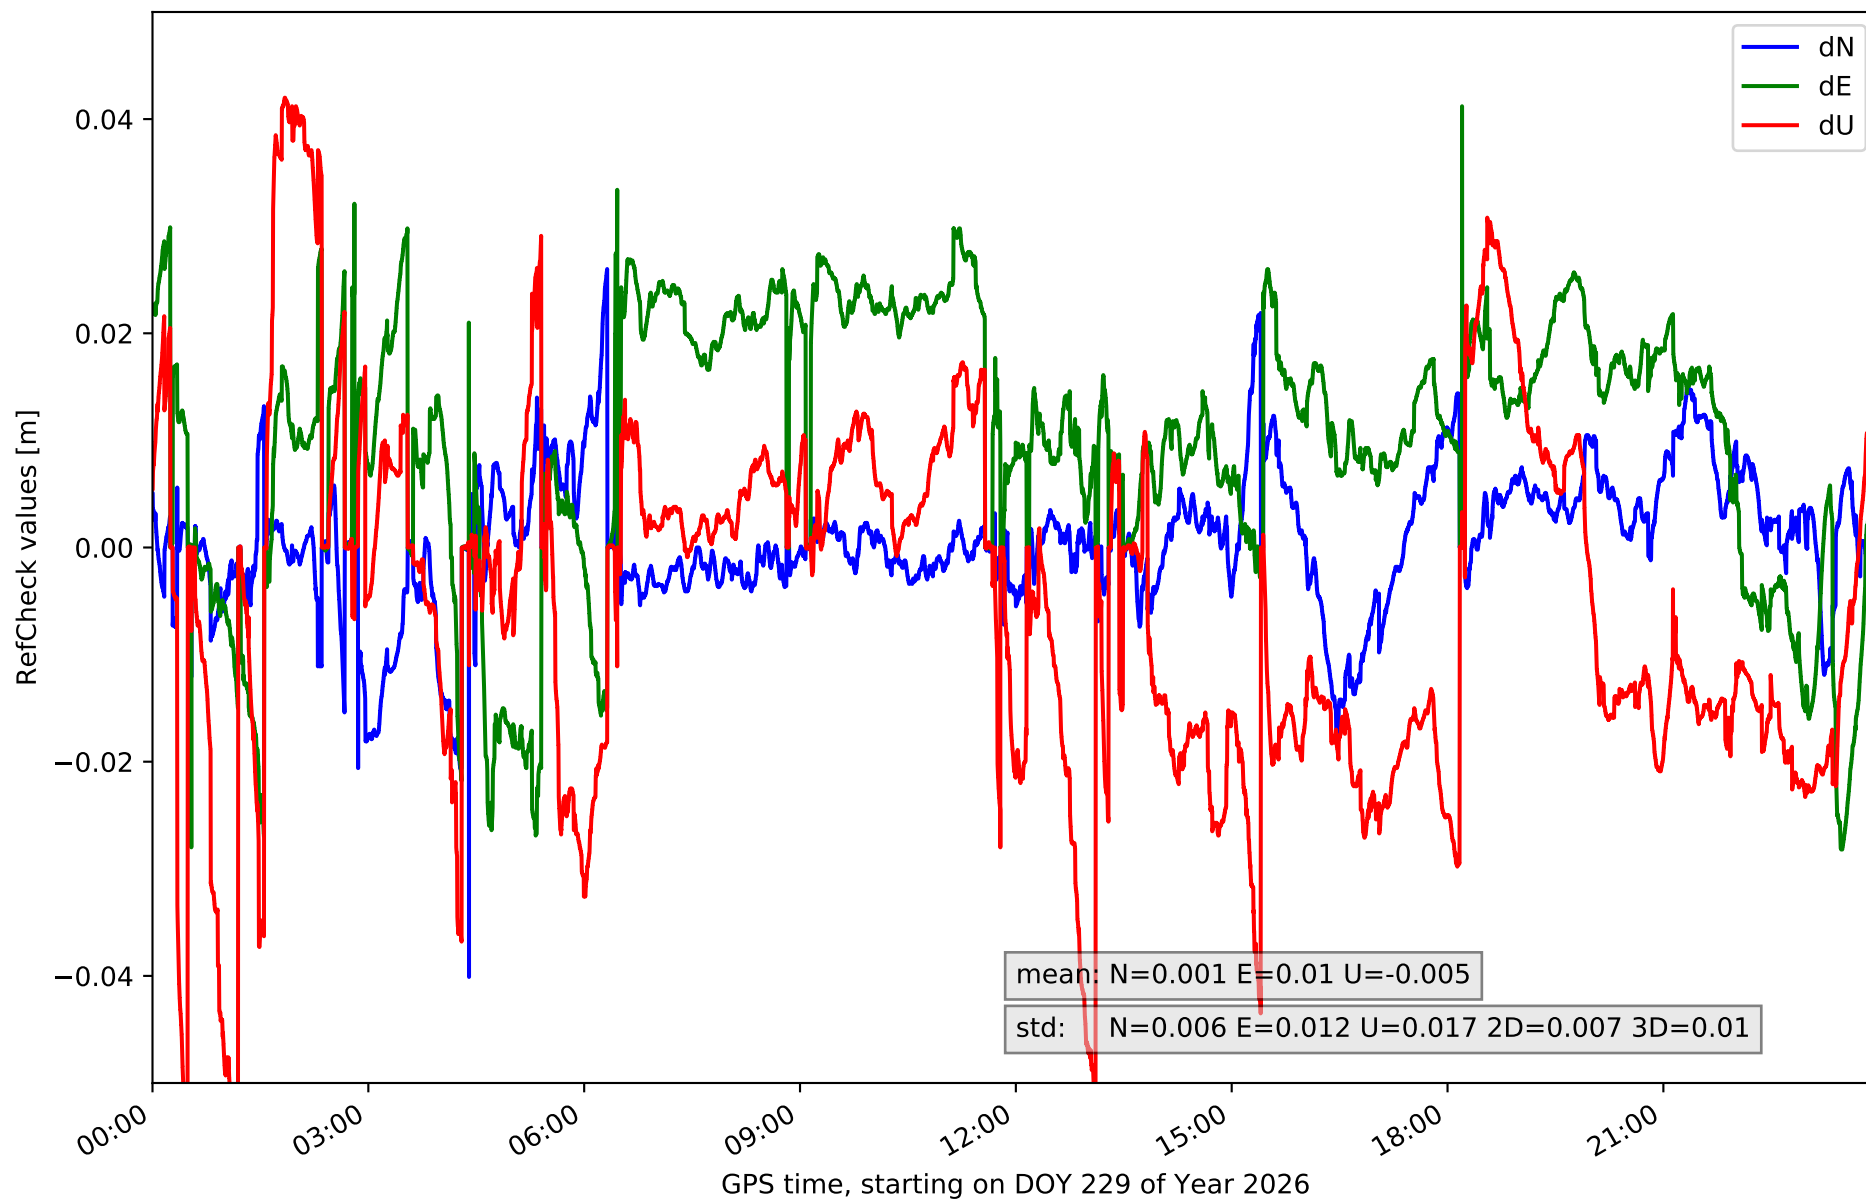

RefCheck values for network N31T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
FUER	-0.011	0.018	0.005	-0.028	0.019	0.007	-0.029	0.056	0.018	0.005	0.012	22120	28.5	24437	31.5
LALA	-0.008	0.021	0.005	-0.016	0.021	0.007	-0.02	0.06	0.019	0.005	0.014	36225	46.7	30664	39.5
LZ01	-0.034	0.001	0.006	-0.032	0.01	0.008	-0.033	0.054	0.018	0.006	0.009	74183	95.6	64532	83.2
LZ02	-0.021	0.006	0.005	-0.029	0.006	0.008	-0.03	0.037	0.014	0.006	0.008	71799	92.6	51070	65.8
LZ03	-0.028	0.021	0.005	-0.03	0.026	0.008	-0.055	0.06	0.019	0.007	0.014	67352	86.8	58755	75.8
MASP	-0.03	0.038	0.009	-0.03	0.047	0.012	-0.06	0.031	0.017	0.008	0.011	61239	79.0	58044	74.8
ULP2	-0.04	0.026	0.006	-0.028	0.041	0.012	-0.06	0.042	0.017	0.007	0.01	56674	73.1	54847	70.7
Mean	-0.025	0.019	0.006	-0.028	0.024	0.009	-0.041	0.049	0.017	0.006	0.011	55656.0	71.8	48907.0	63.0
Min/Max	-0.04	0.038	0.009	-0.032	0.047	0.012	-0.06	0.06	0.019	0.008	0.014	74183	95.6	64532	83.2

fixing statistic for network N31T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	86.9	91.3	75.0	90.8	86.5
considering satellites with dual-frequency fixed	80.4	81.9	68.2	85.2	82.1
considering all signals separately	81.6	82.6	68.2	85.7	82.1