summary for network N31T

timeperiod chosen: from 2026-03-03-00:00:00 until 2026-03-03-23:59:59

average update rate (durations larger than 15 seconds considered as observation gap): 1.0 seconds
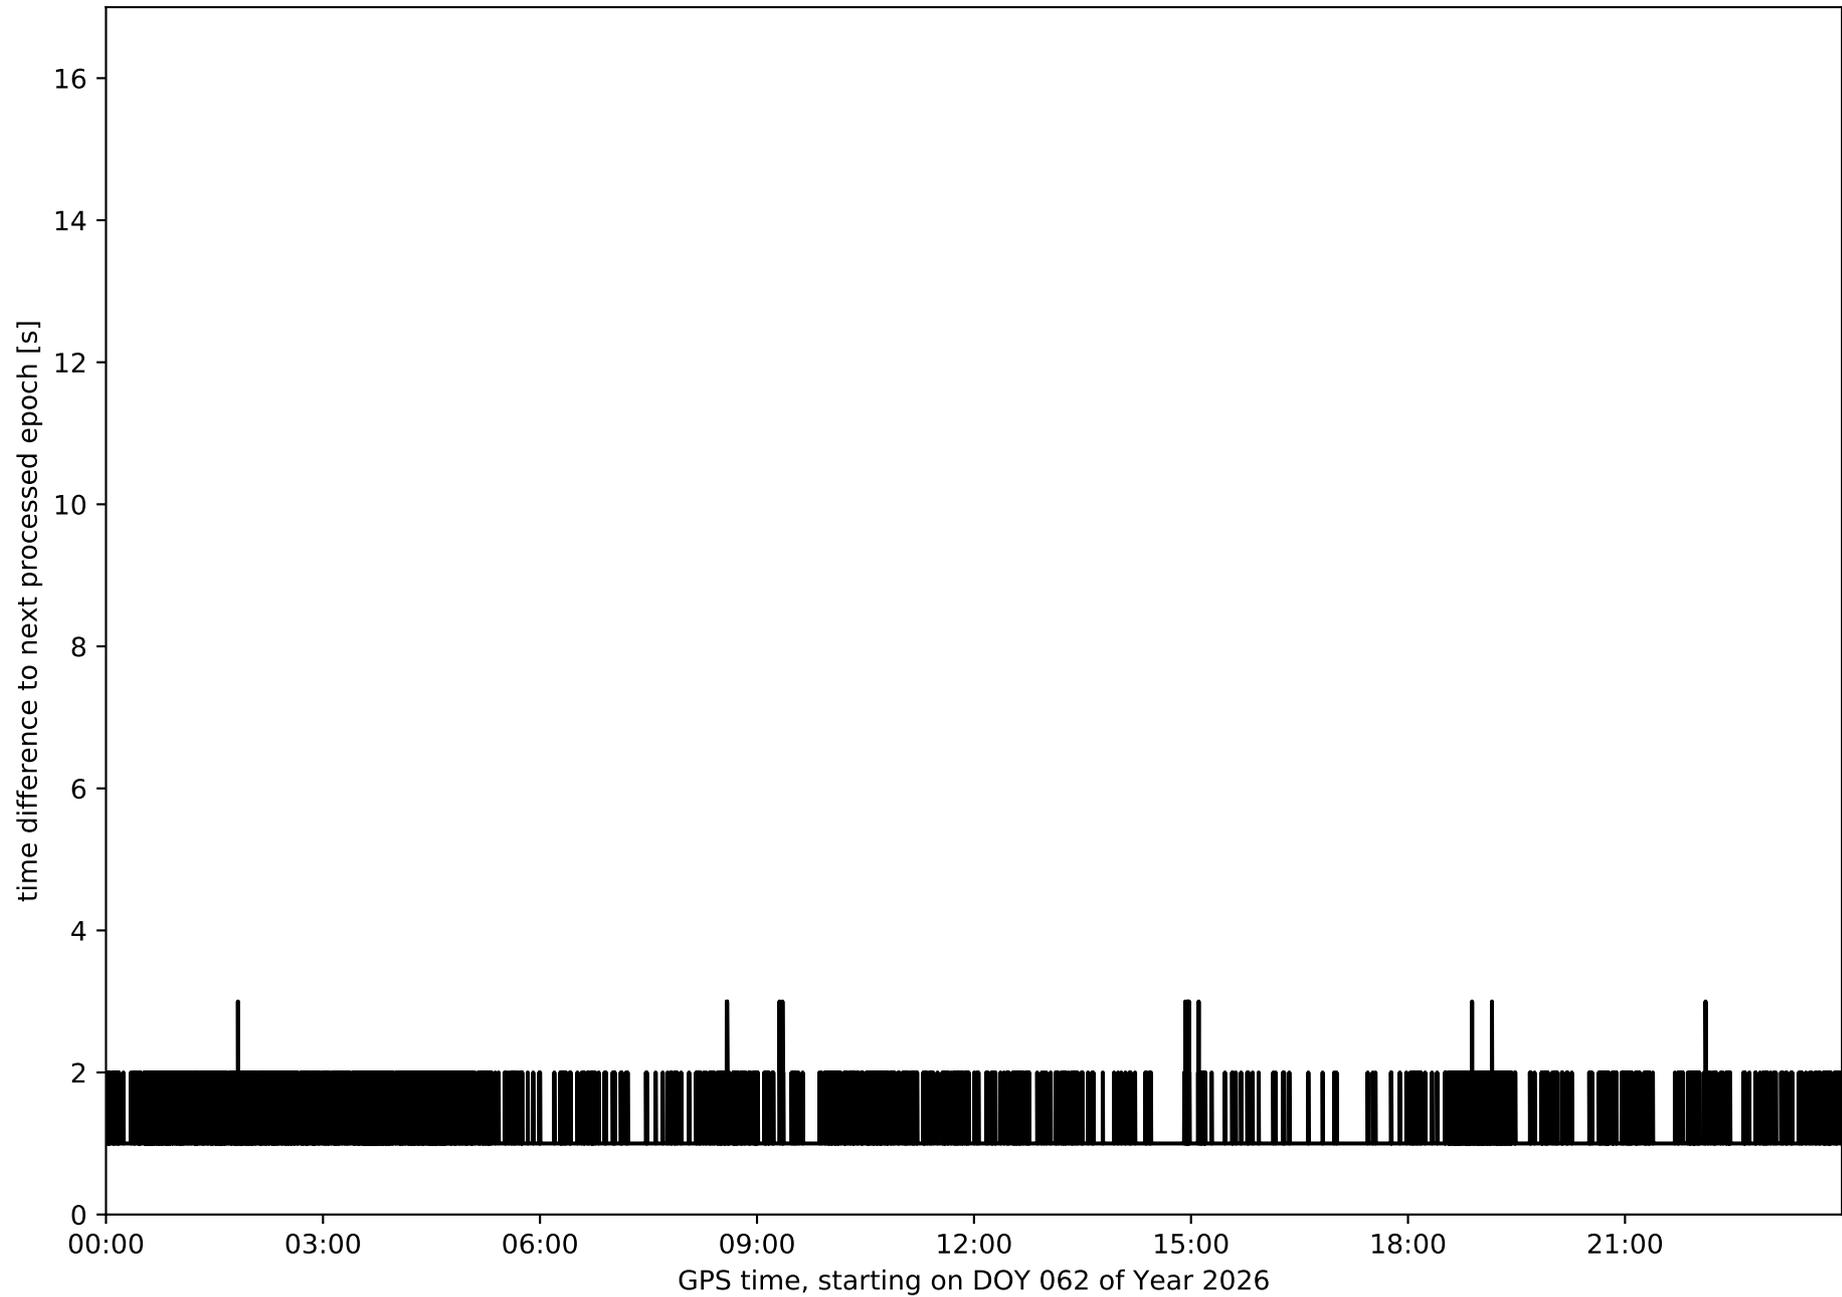
average fixing percentage with threshold set to 0.3: 76.6 percent

stations available: 7 of 7

station information:

|			
station FUER:	antenna: LEIAR20 LEIM	receiver: LEICA GR50	height: 76.887
station LALA:	antenna: TRM59900.00 SCIS	receiver: TRIMBLE NETR9	height: 62.306
station LZ01:	antenna: TRM159900.00 NONE	receiver: TRIMBLE NETR9	height: 52.693
station LZ02:	antenna: LEIAR20 NONE	receiver: LEICA GR25	height: 58.039
station LZ03:	antenna: LEIAR20 NONE	receiver: LEICA GR50	height: 314.762
station MASP:	antenna: TRM59900.00 SCIS	receiver: TRIMBLE NETR9	height: 198.846
station ULP2:	antenna: TRM59900.00 SCIS	receiver: TRIMBLE ALLOY	height: 375.129

Processing rate in network N31T

Histogram of the processing rate in network N31T (durations larger 15 seconds neglected)
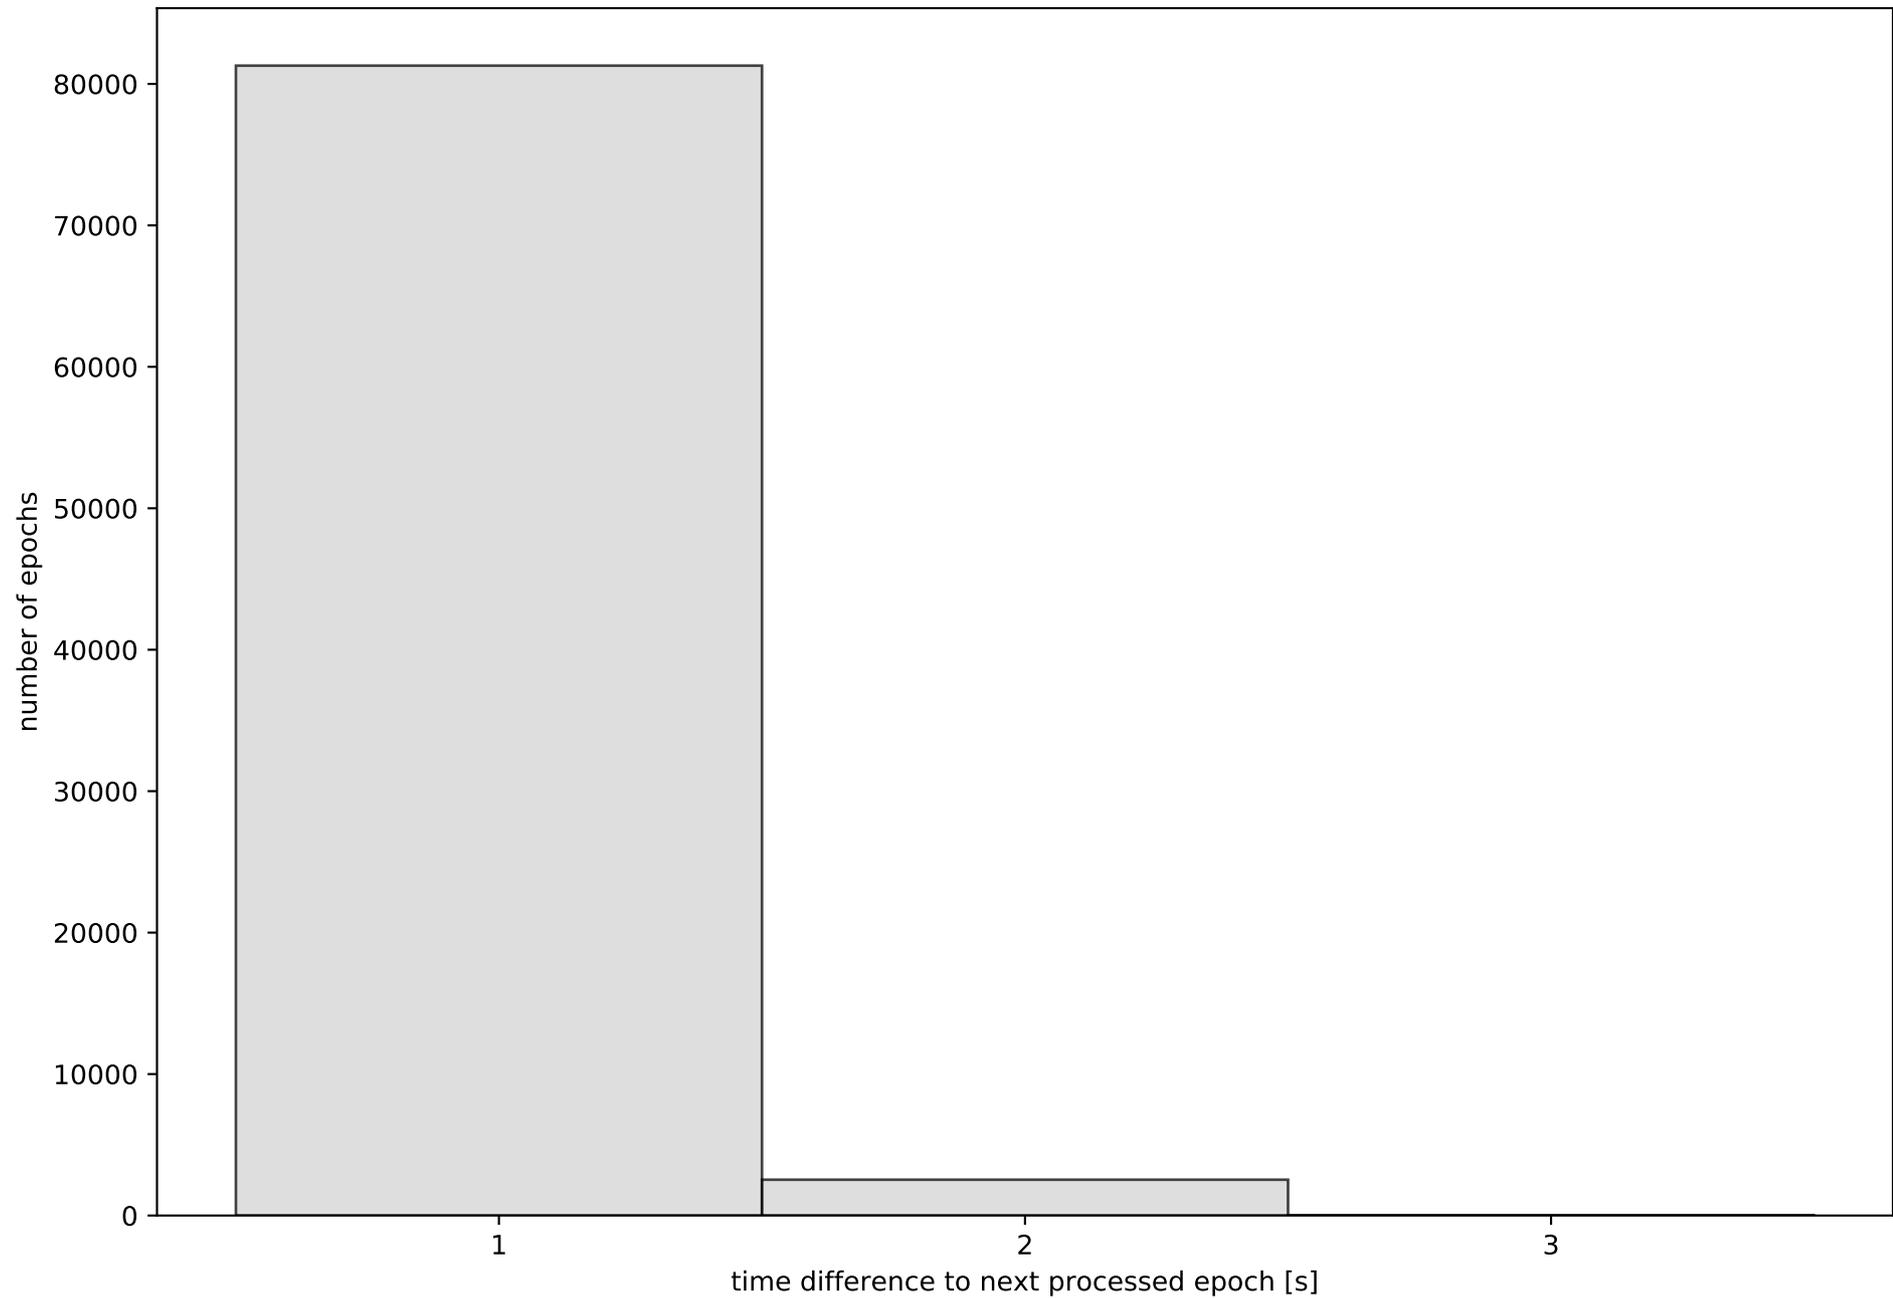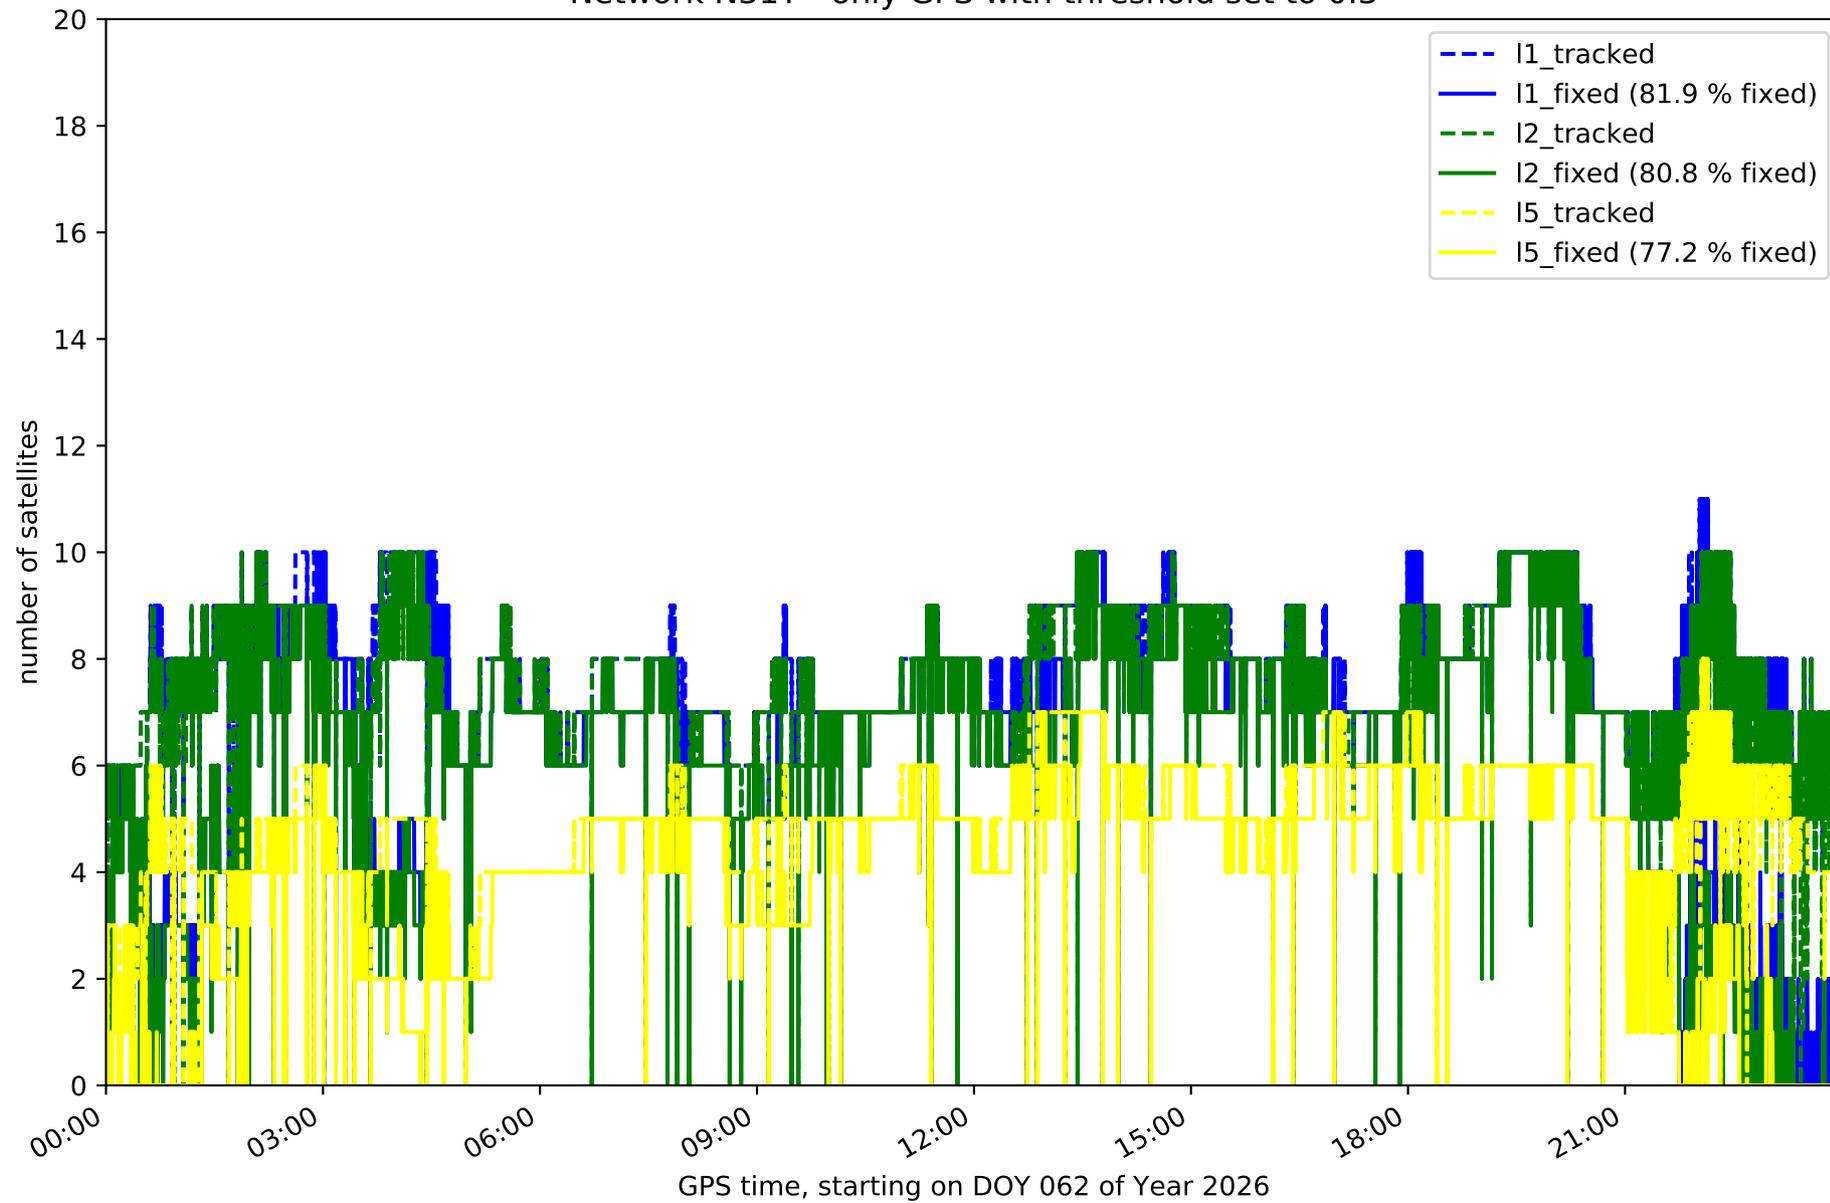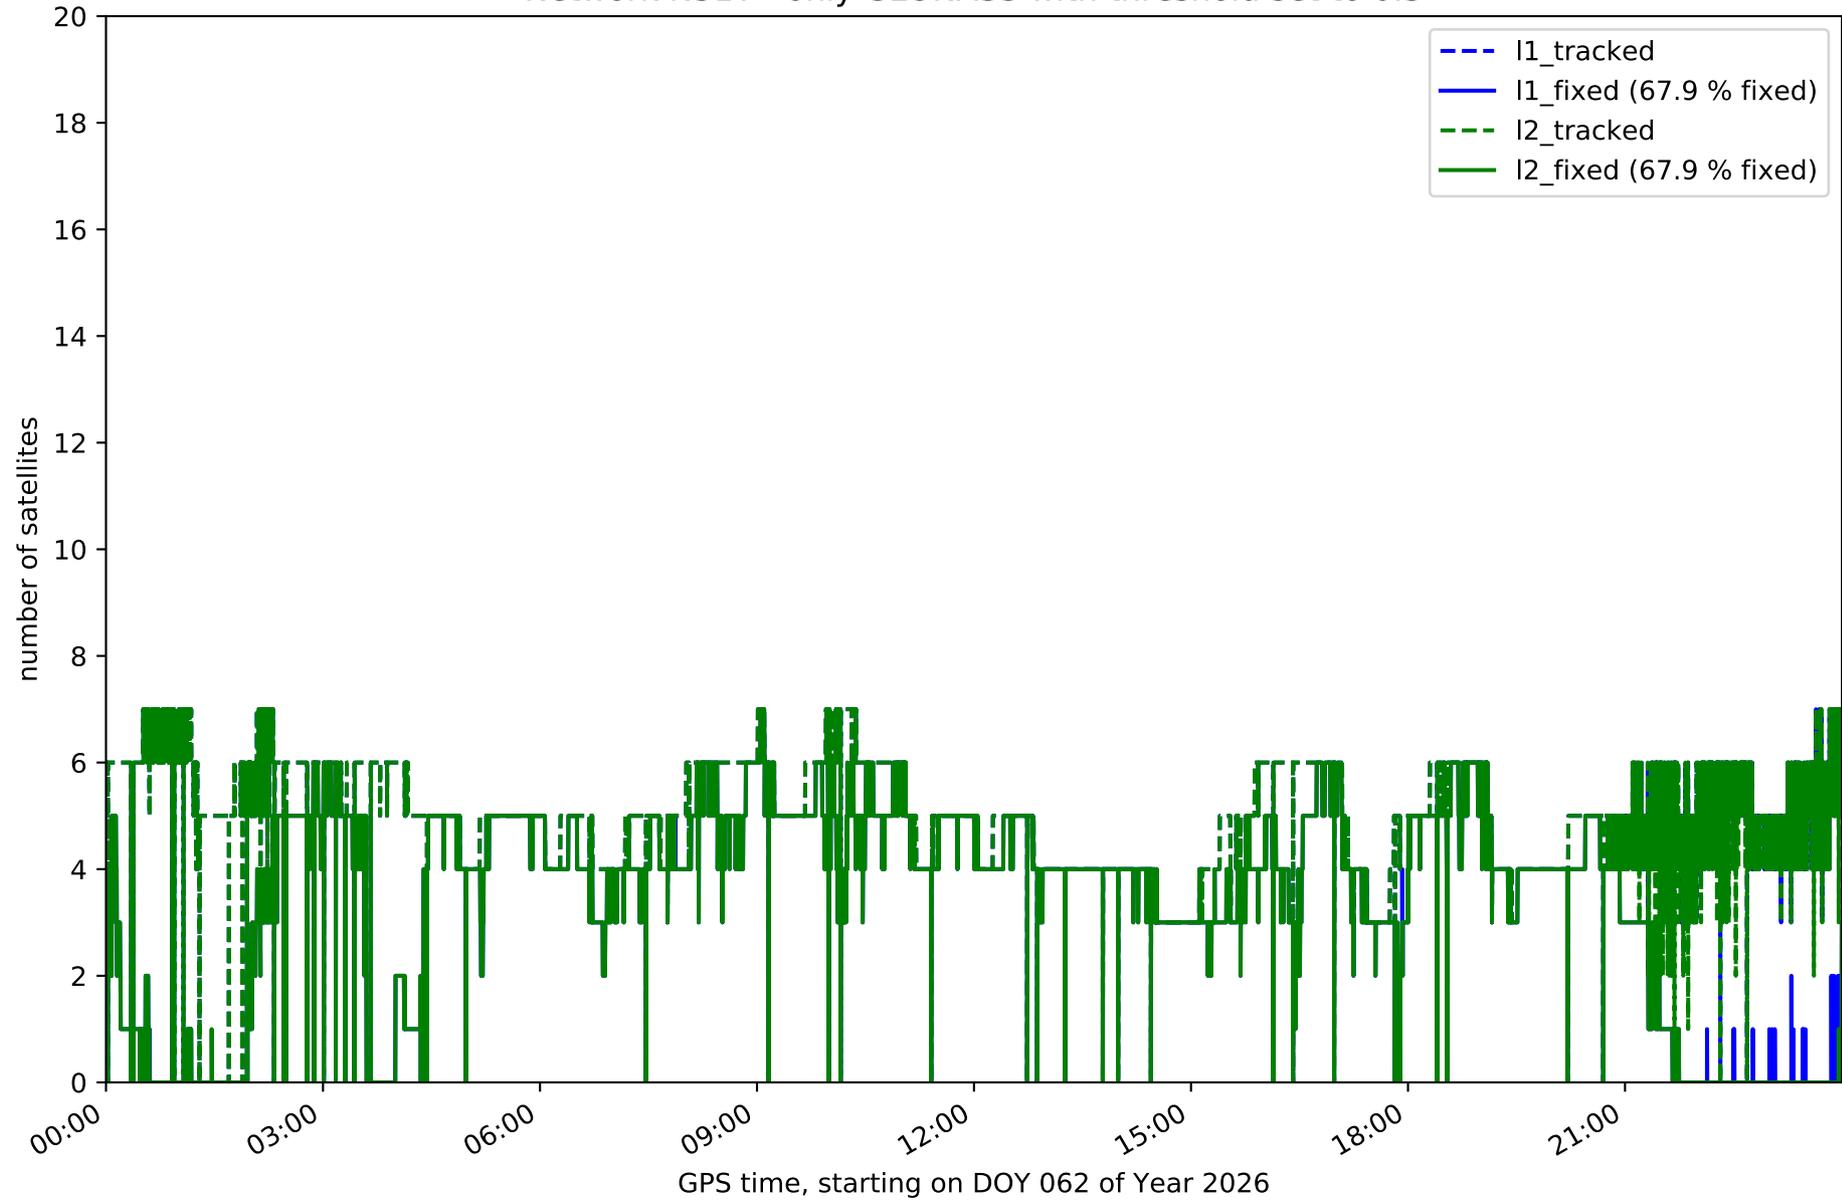
Network N31T with threshold set to 0.3
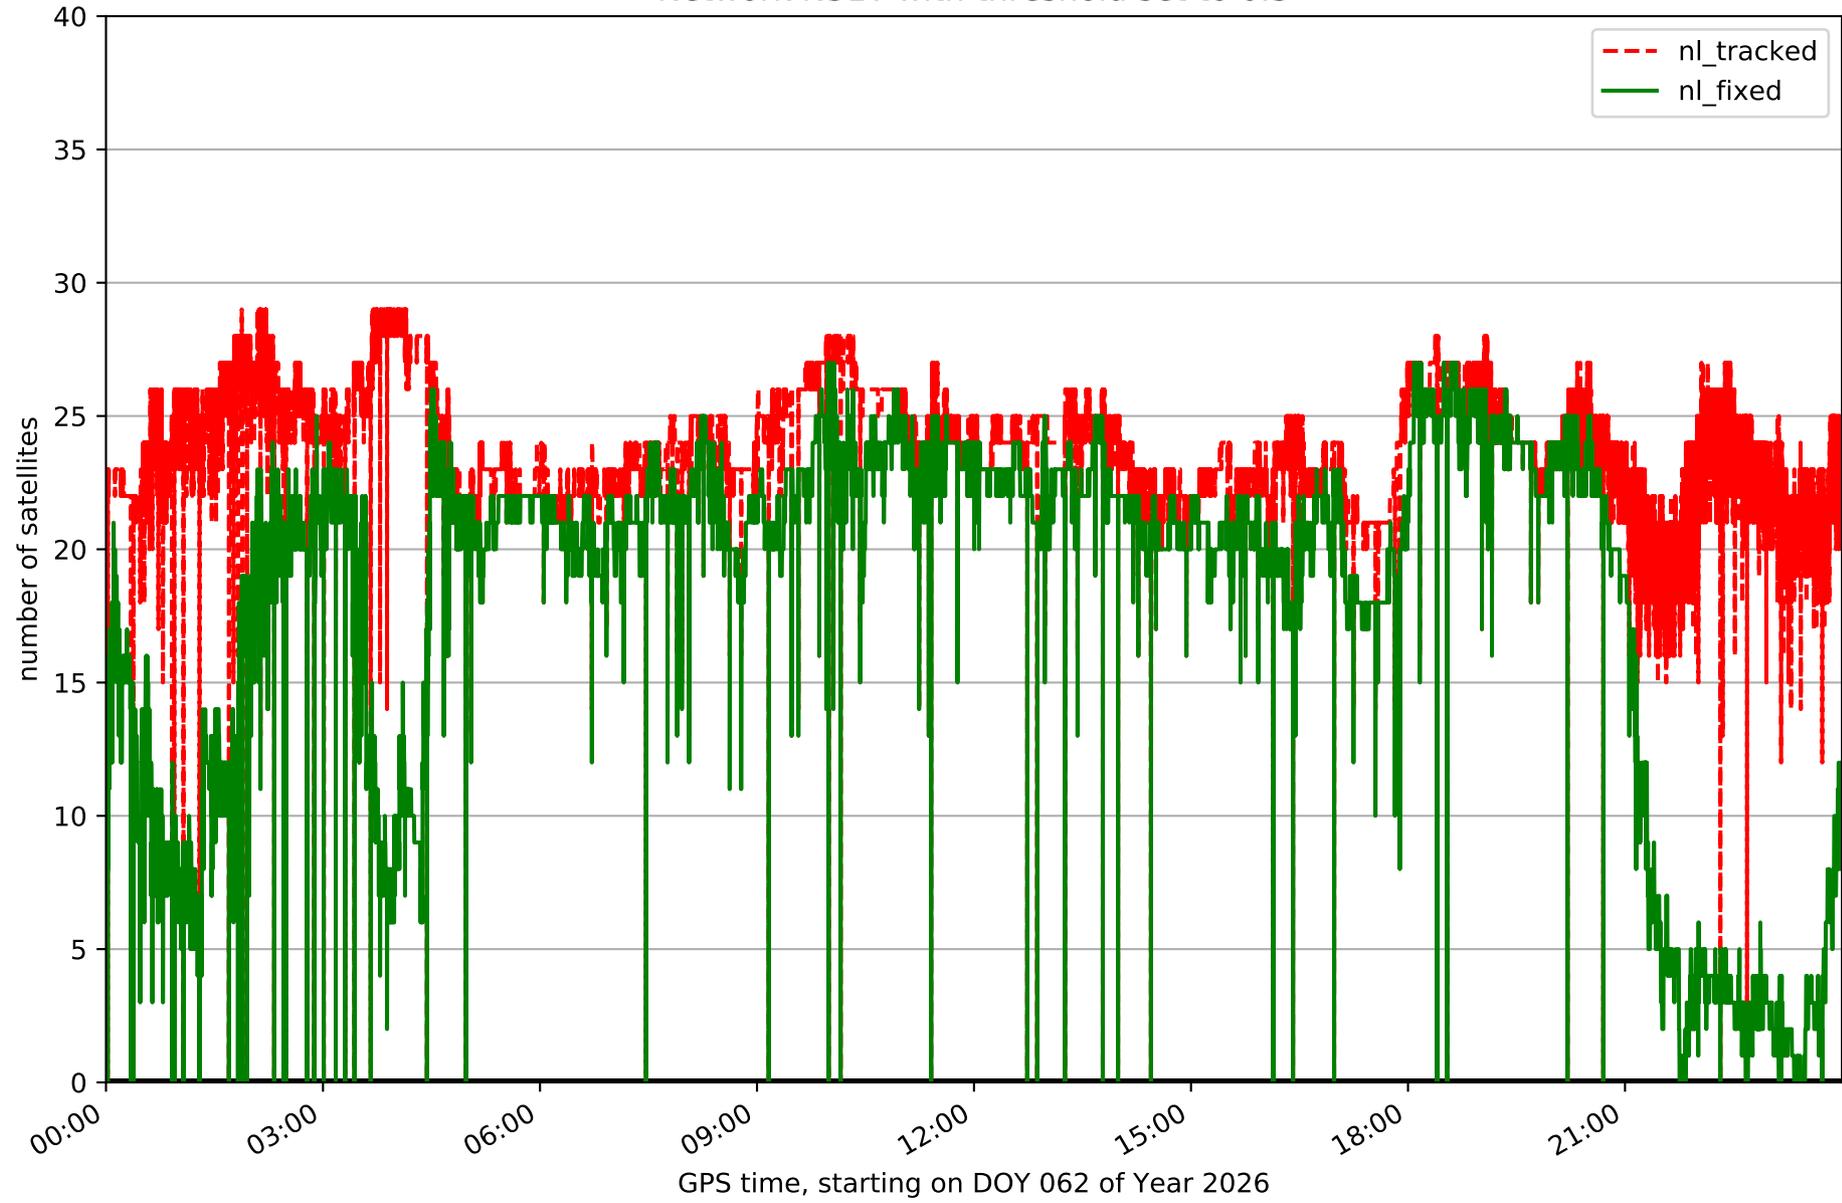
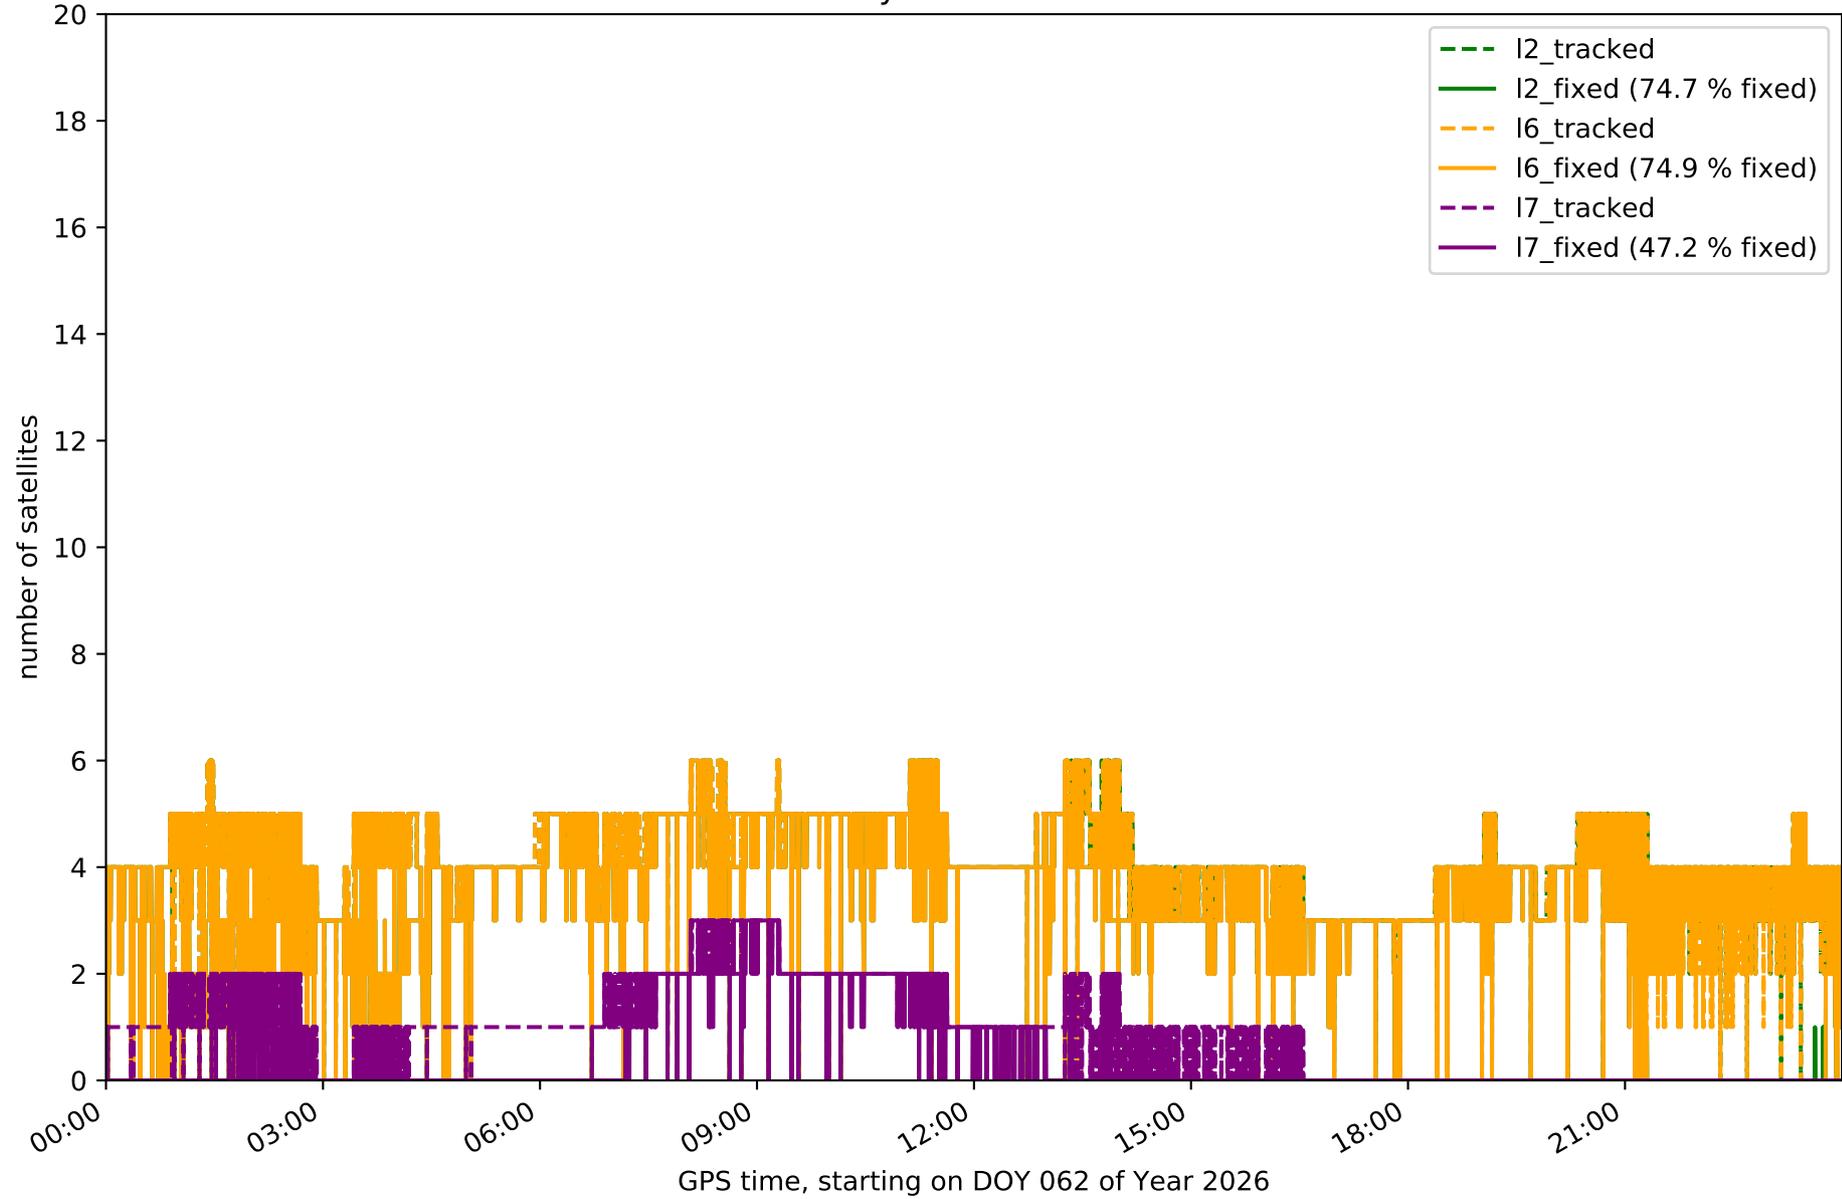Fixing percentage of satellites in network N31T with threshold set to 0.3
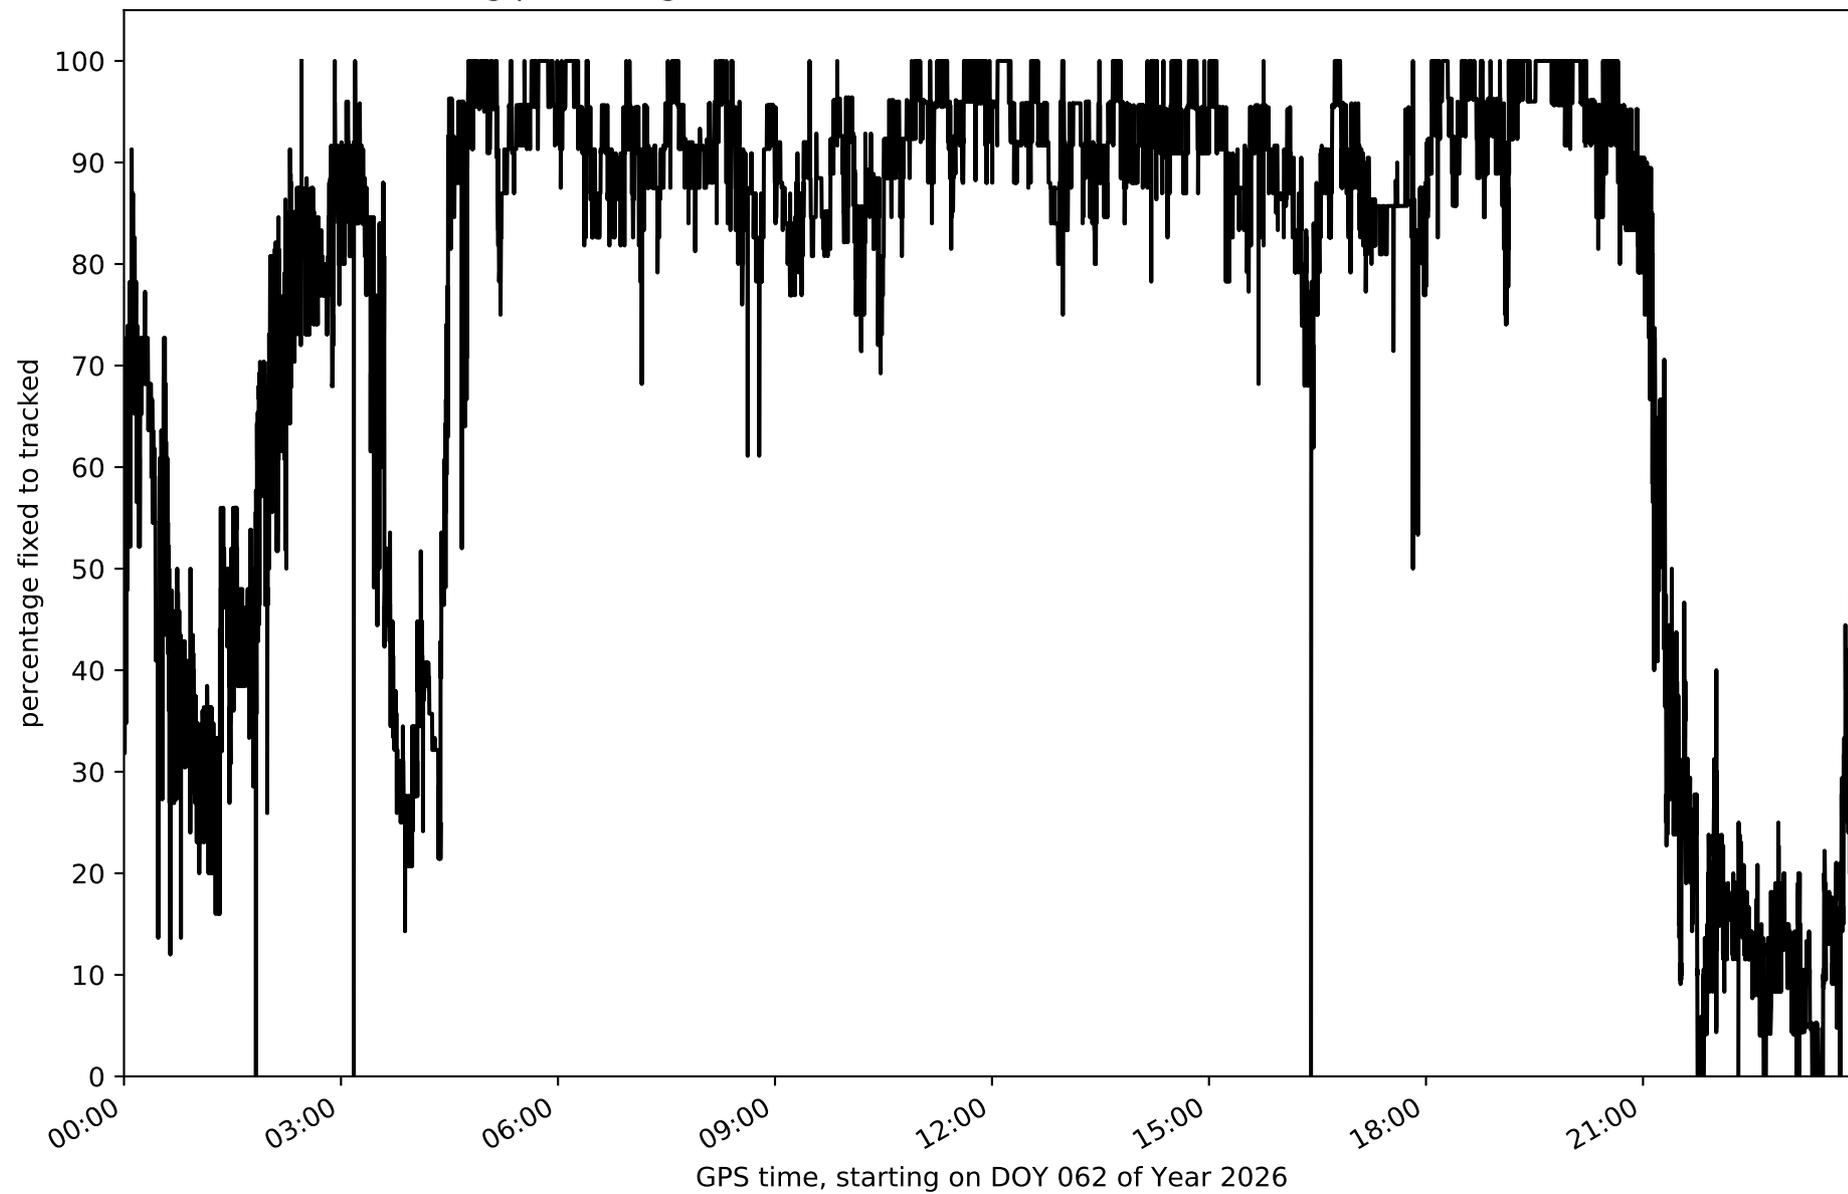
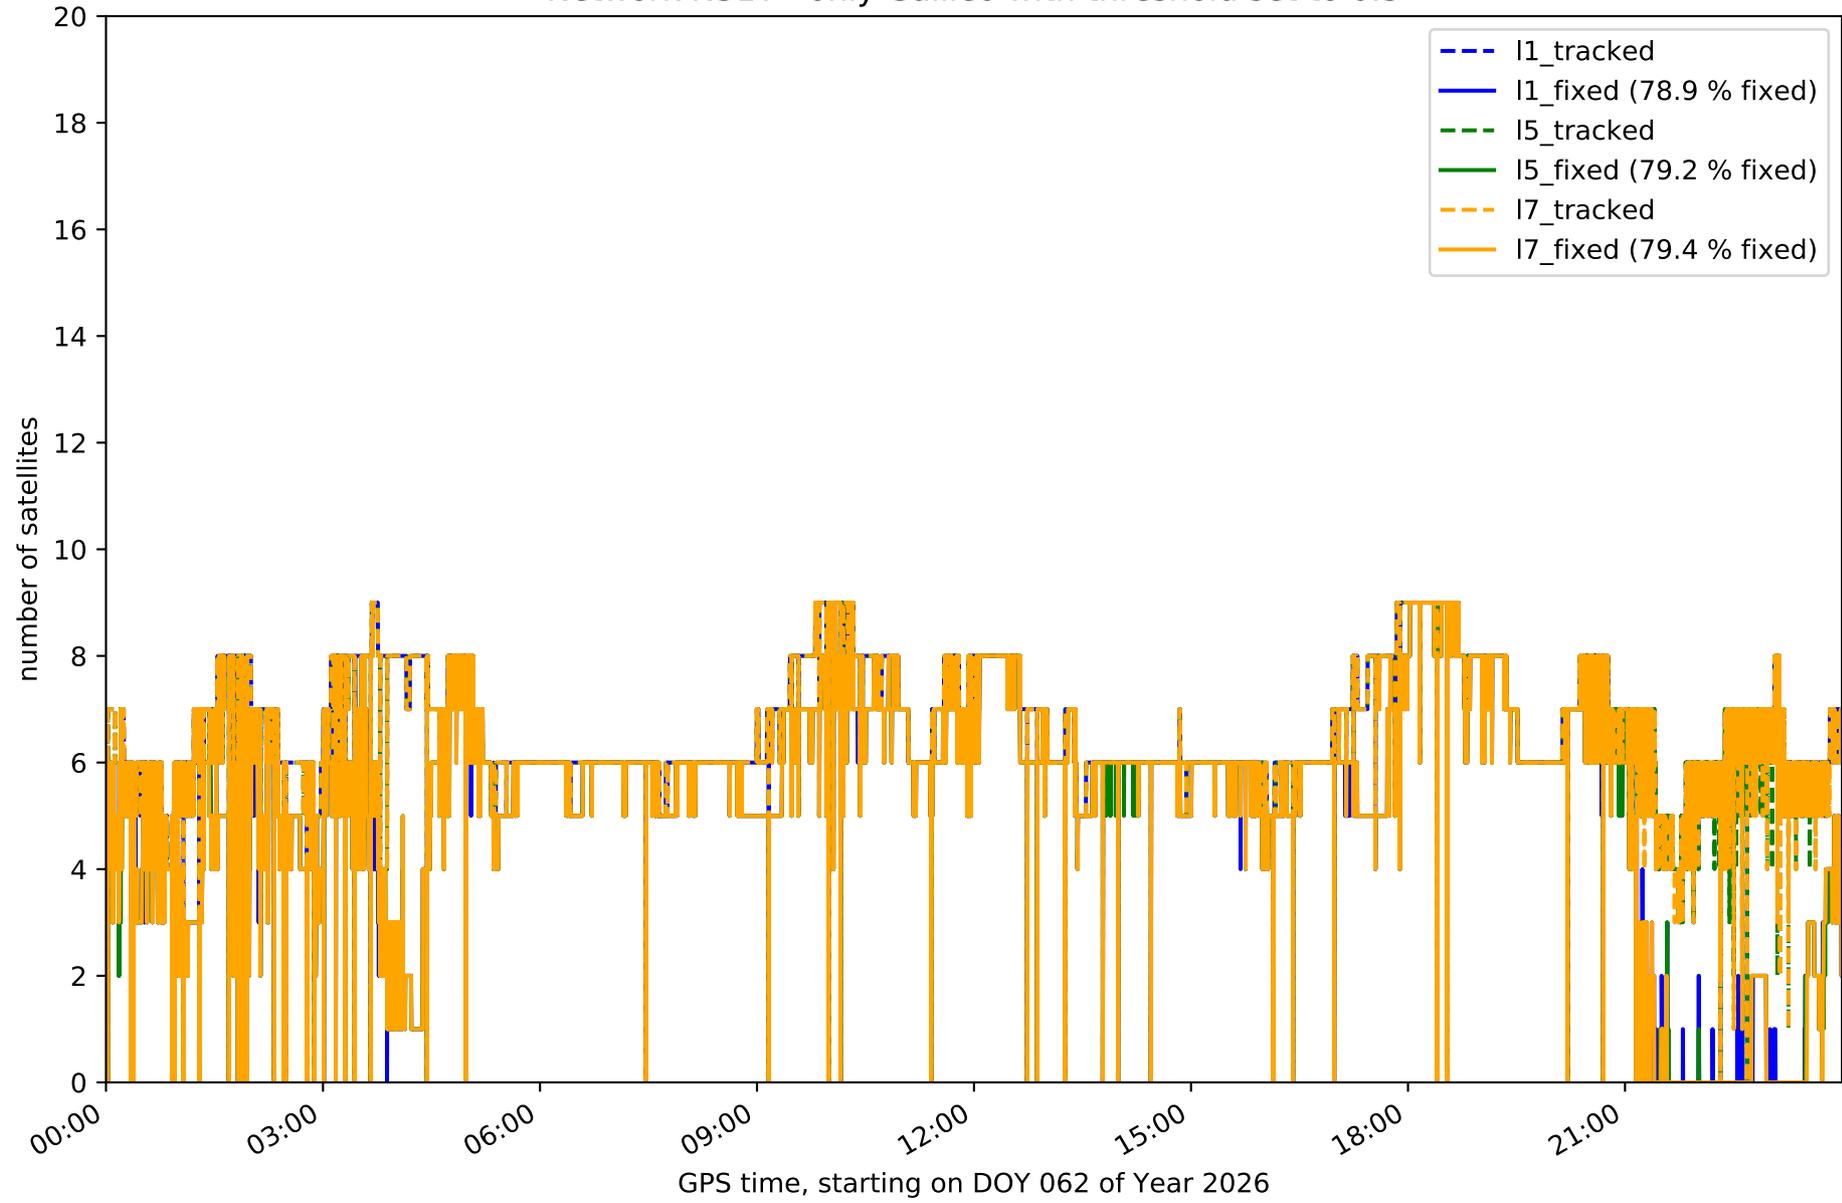Network N31T - only GPS with threshold set to 0.3

Network N31T - only GLONASS with threshold set to 0.3

Network N31T - only BDS with threshold set to 0.3

Legend:
- l2_tracked
- l2_fixed (74.7 % fixed)
- l6_tracked
- l6_fixed (74.9 % fixed)
- l7_tracked
- l7_fixed (47.2 % fixed)

number of satellites

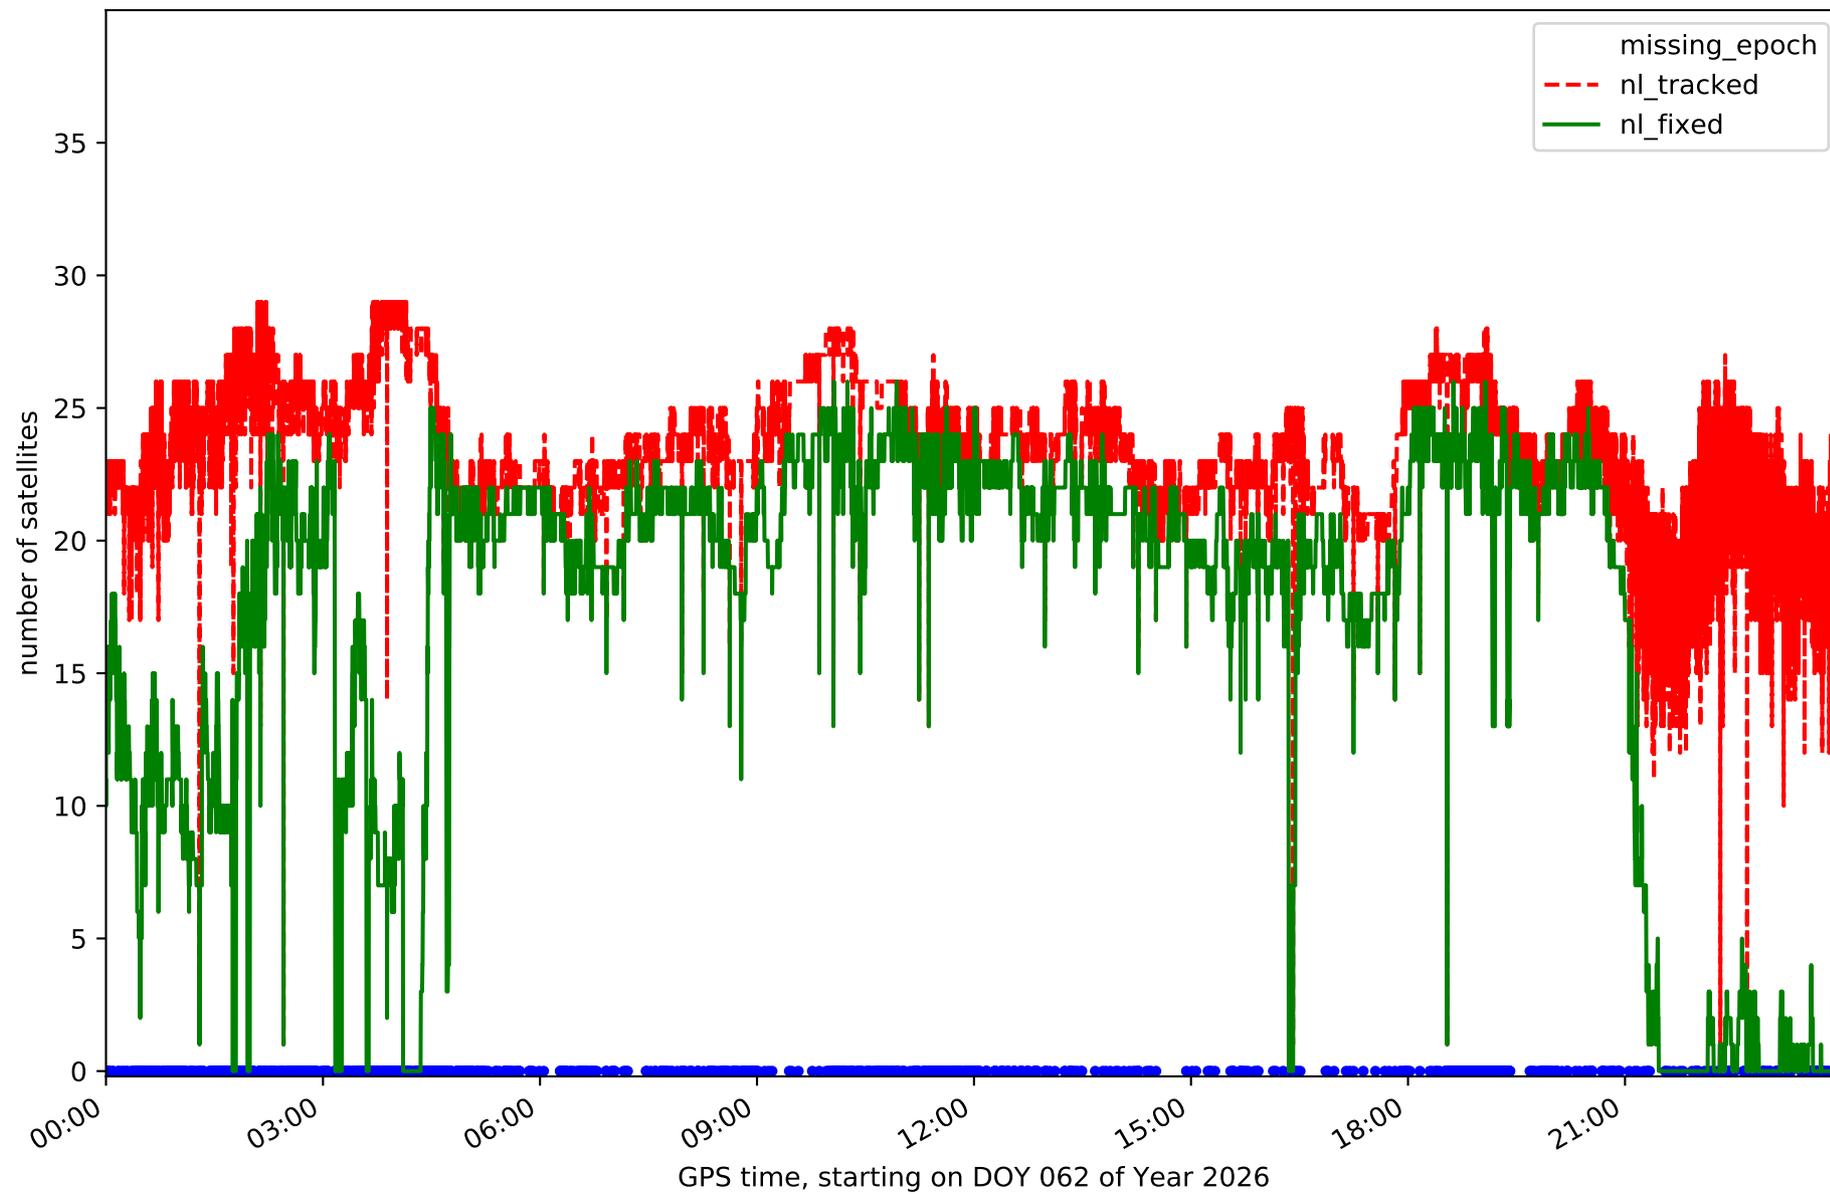GPS time, starting on DOY 062 of Year 2026

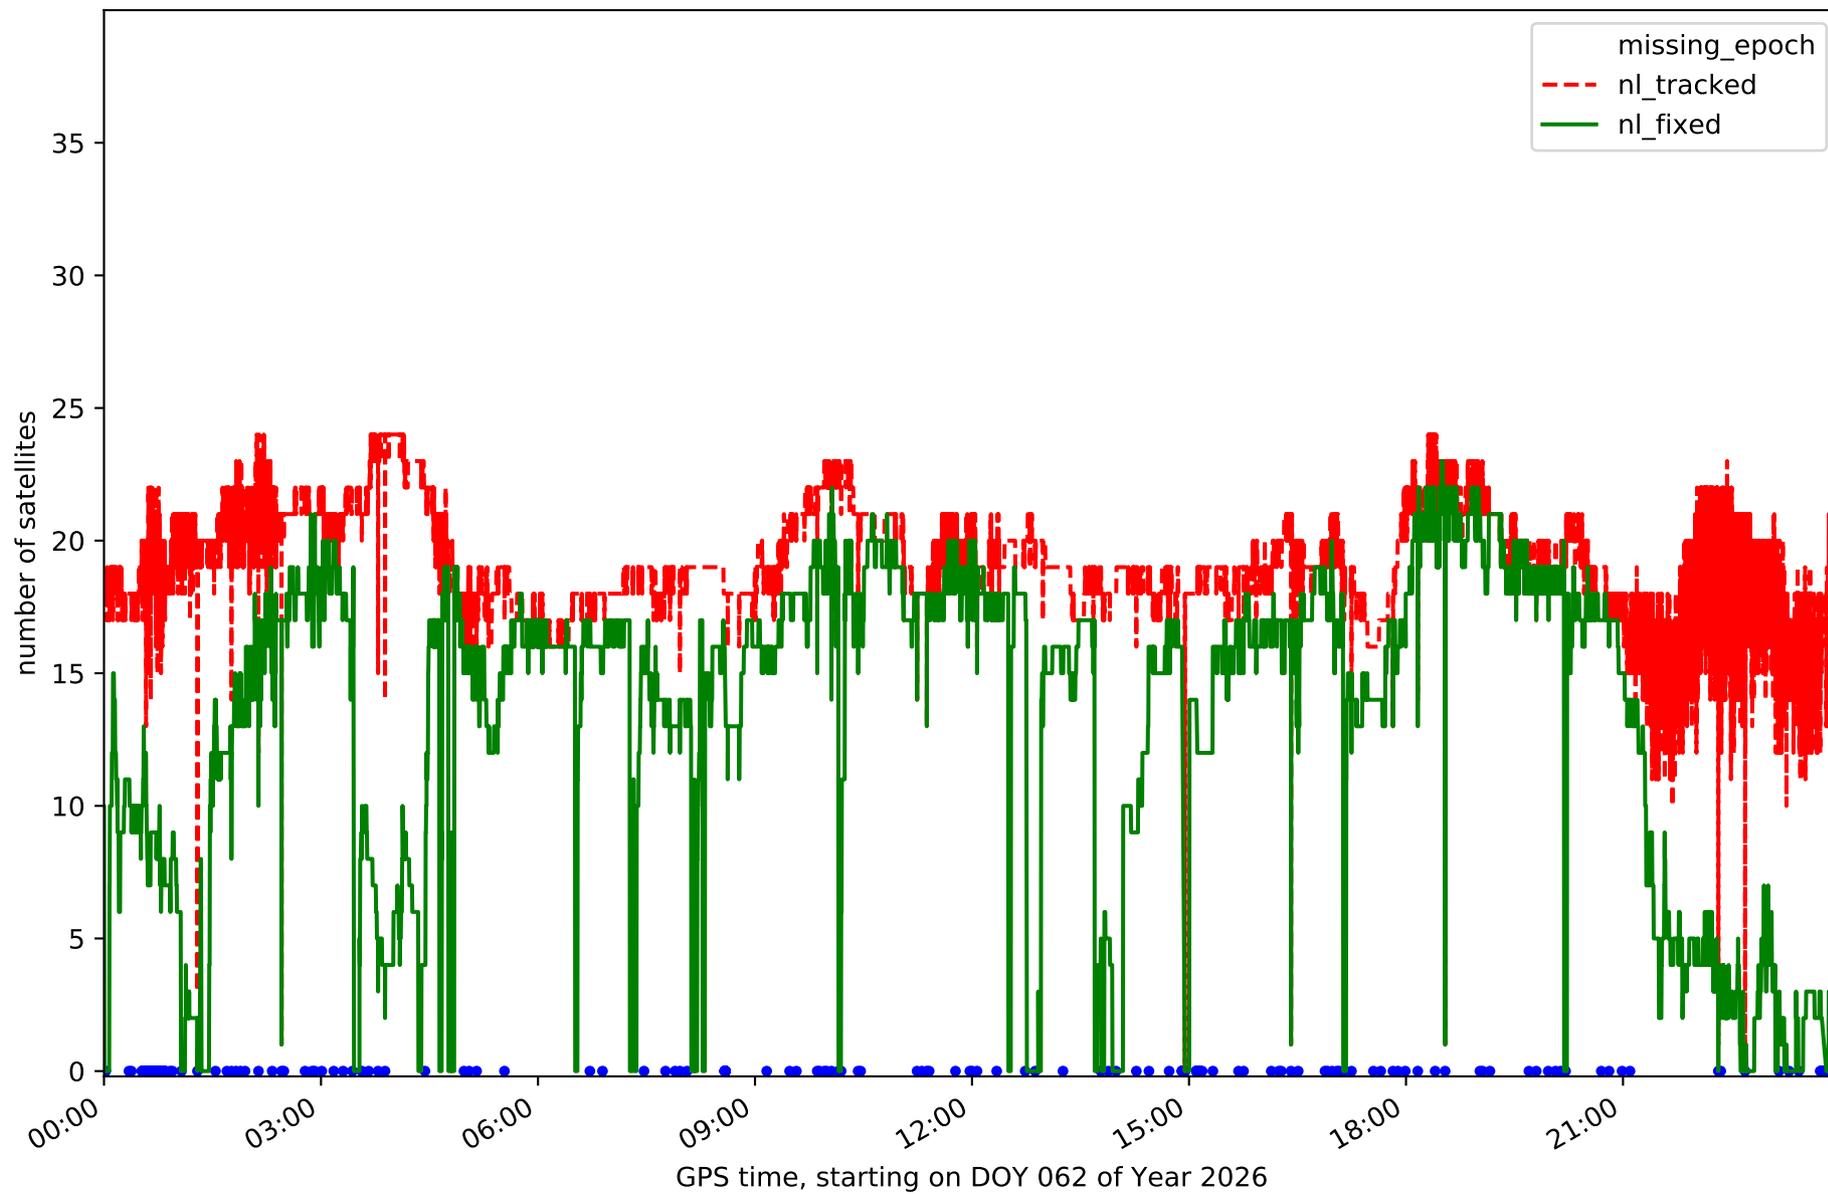Network N31T - only Galileo with threshold set to 0.3

Station FUER in network N31T
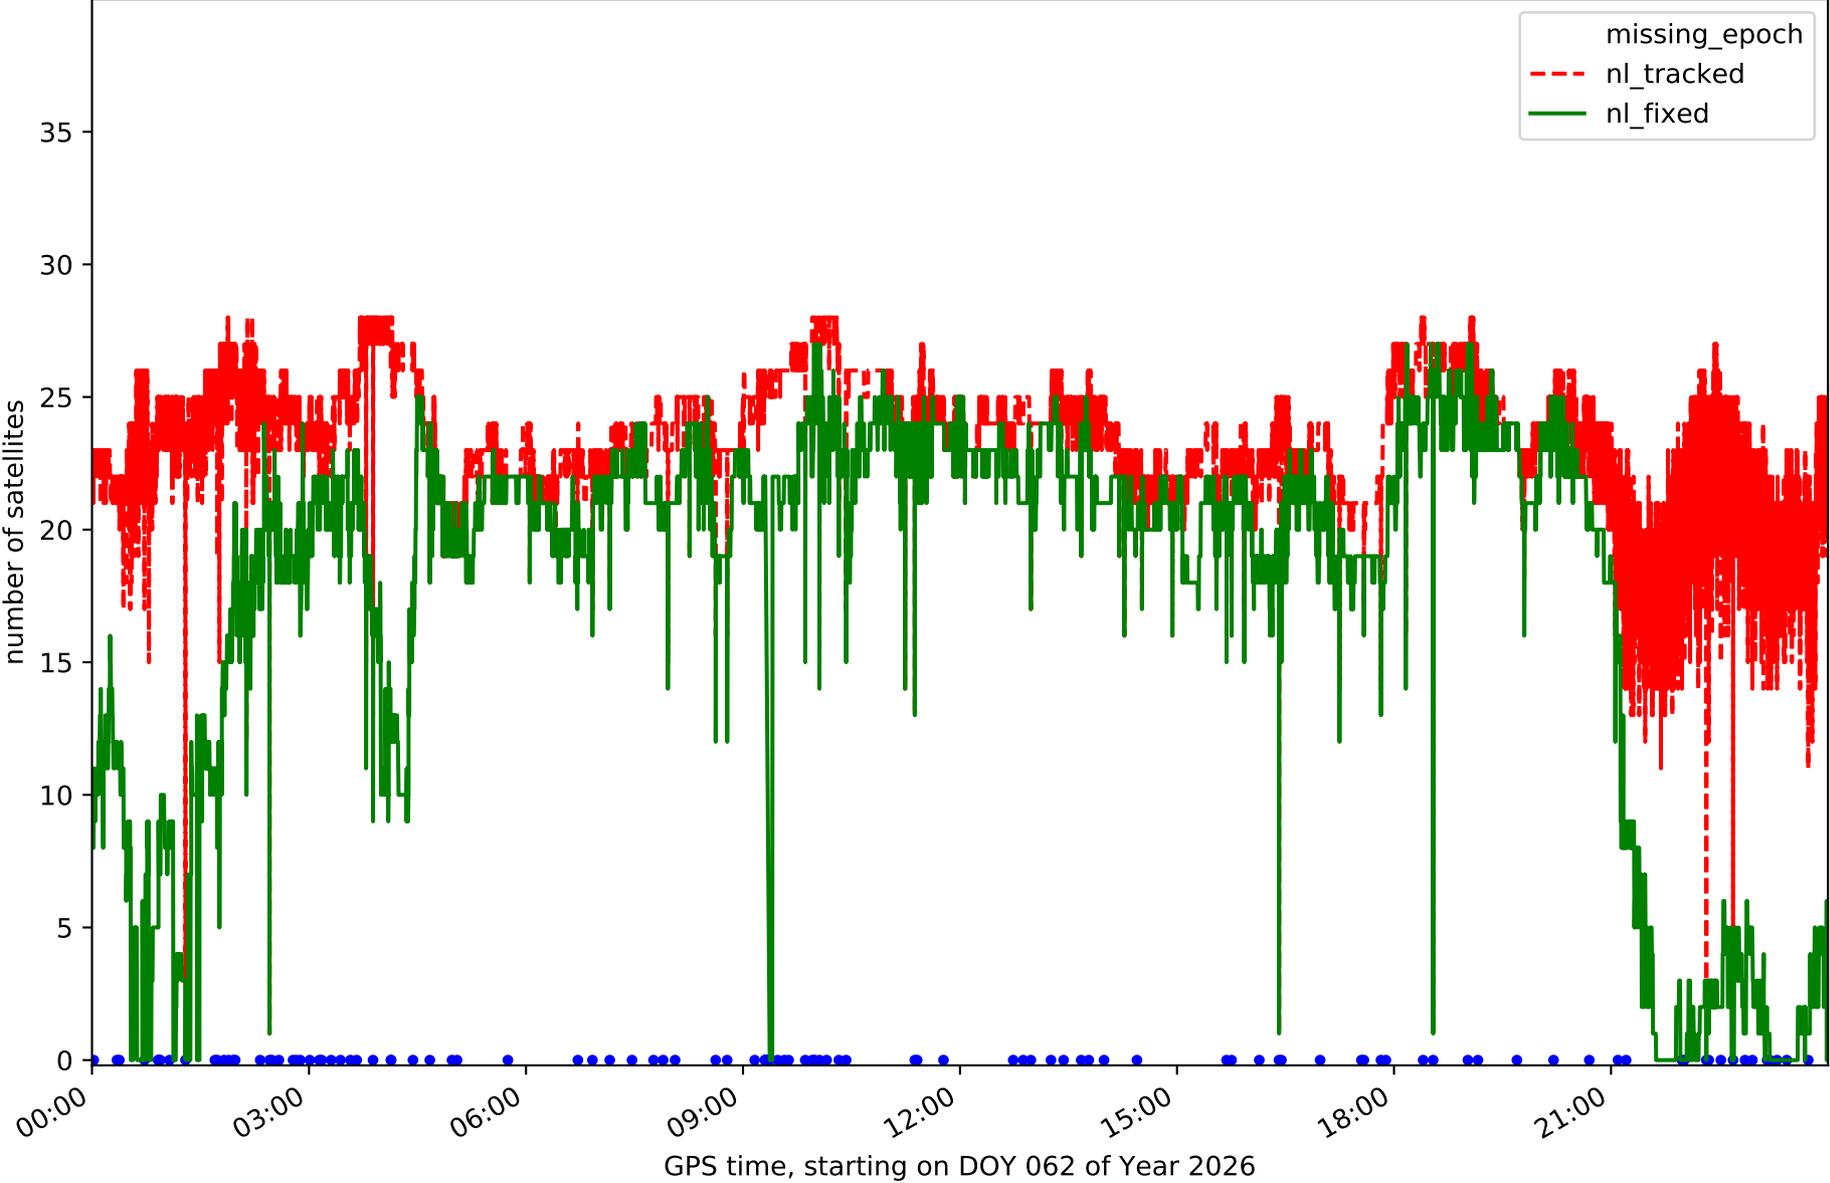
Station LALA in network N31T

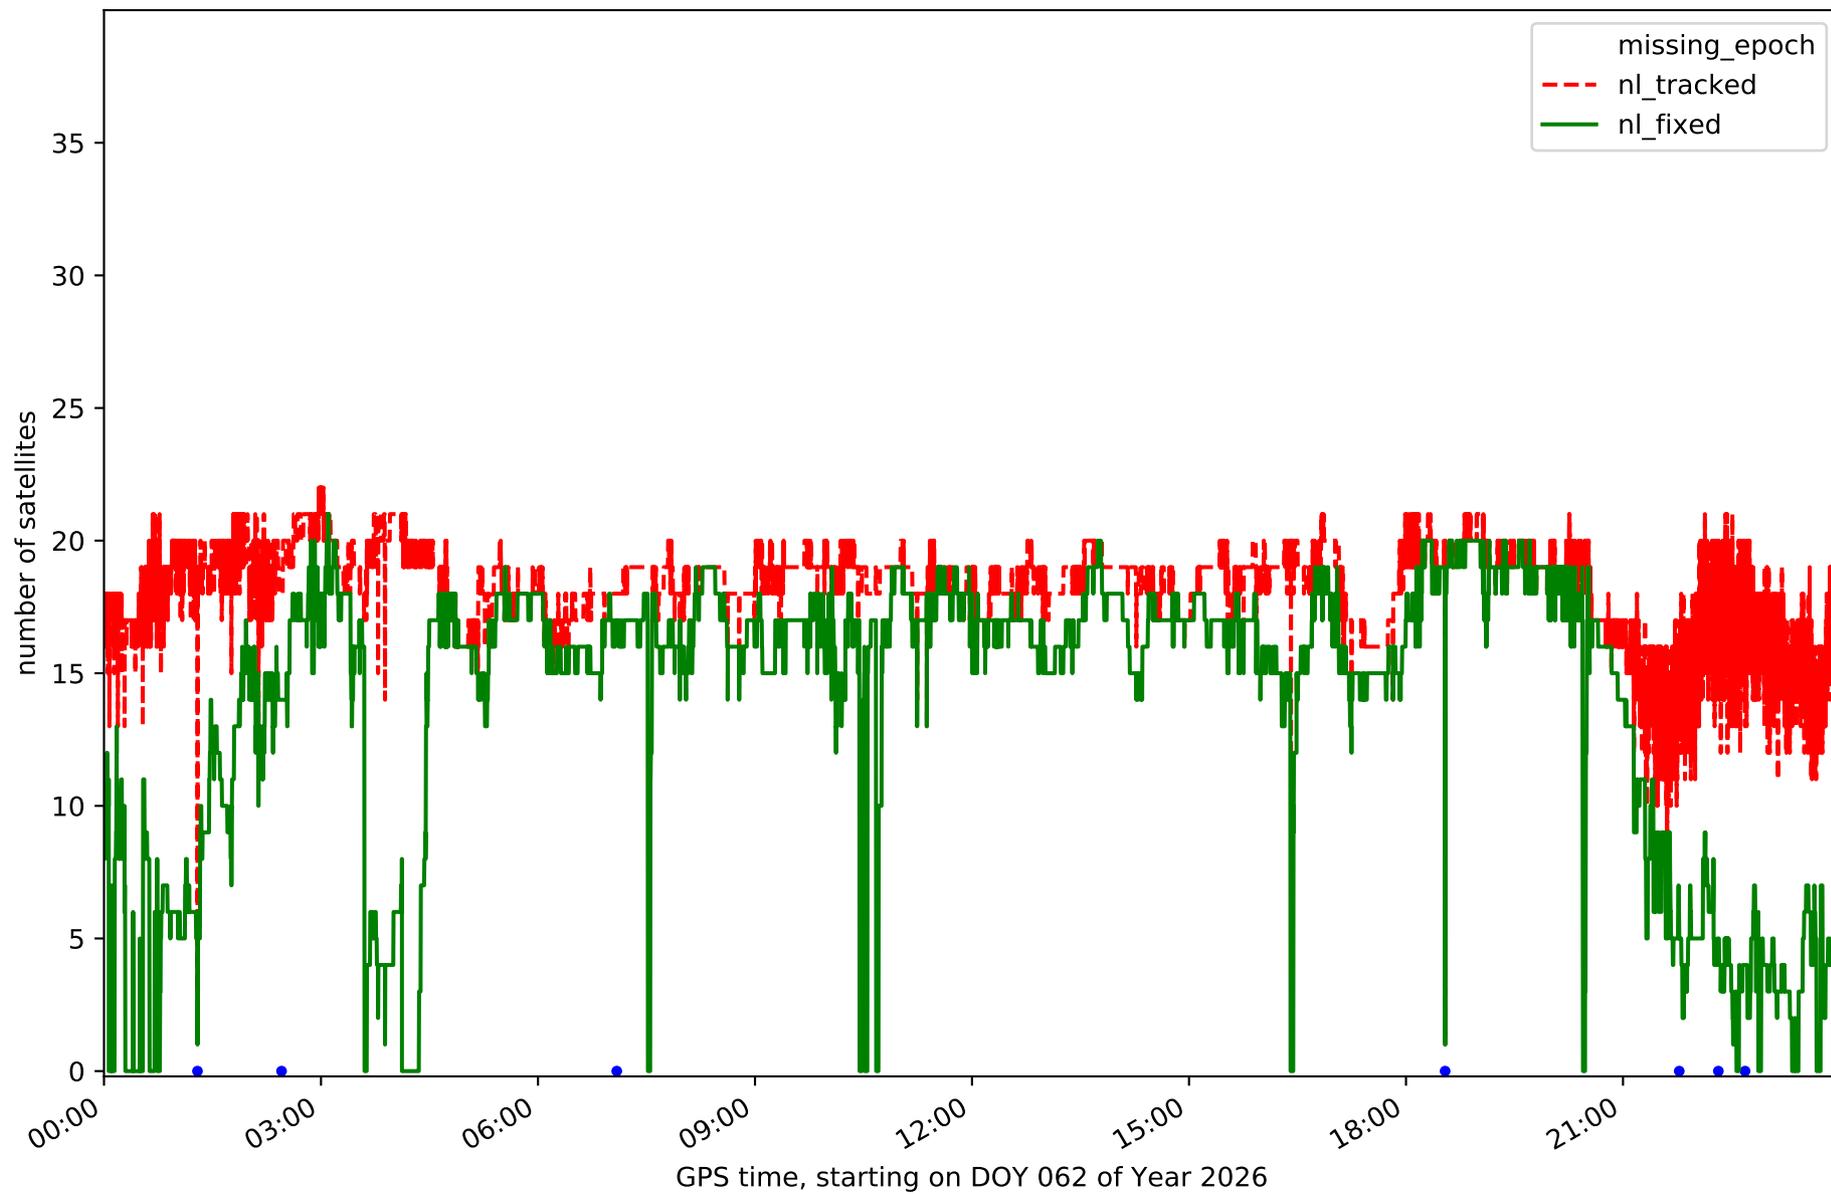Station LZ01 in network N31T

Station LZ02 in network N31T

Station LZ03 in network N31T
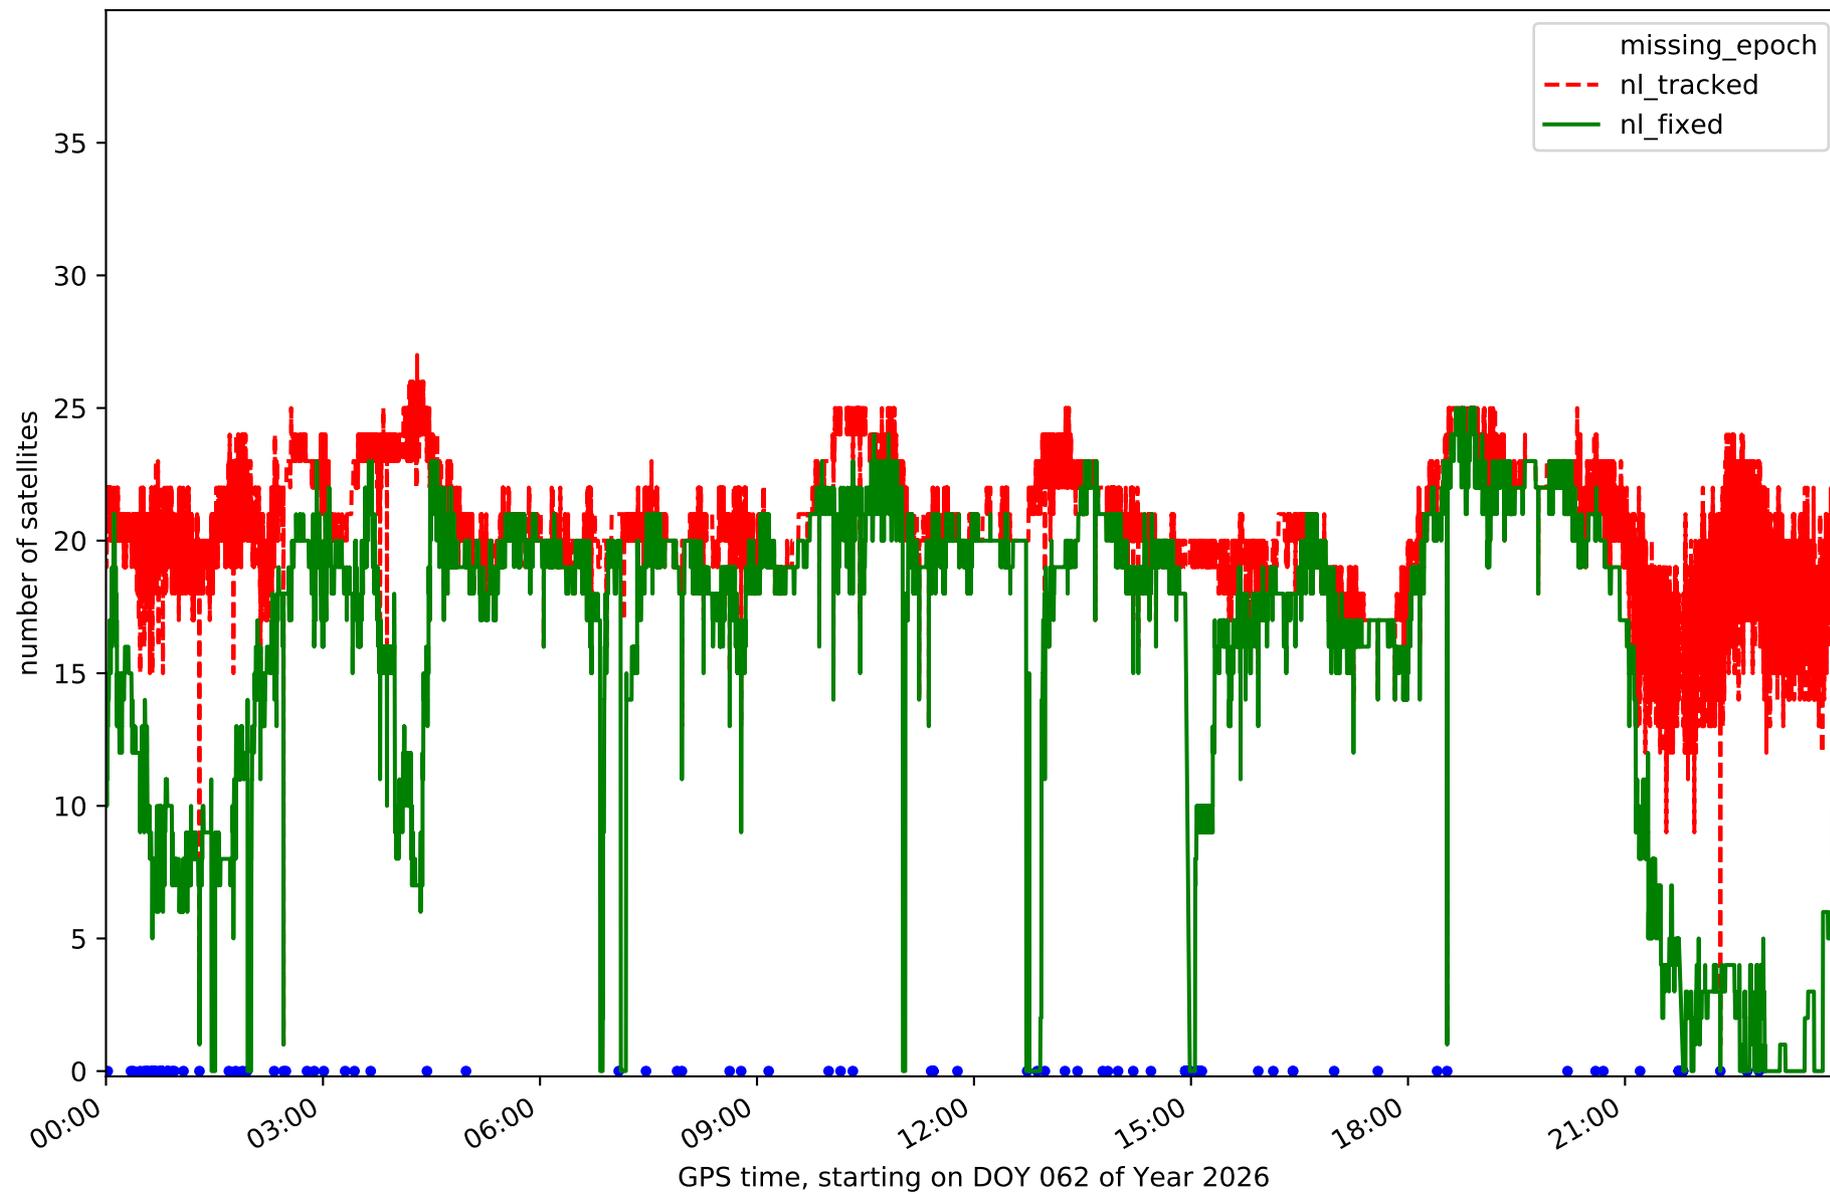
Station MASP in network N31T
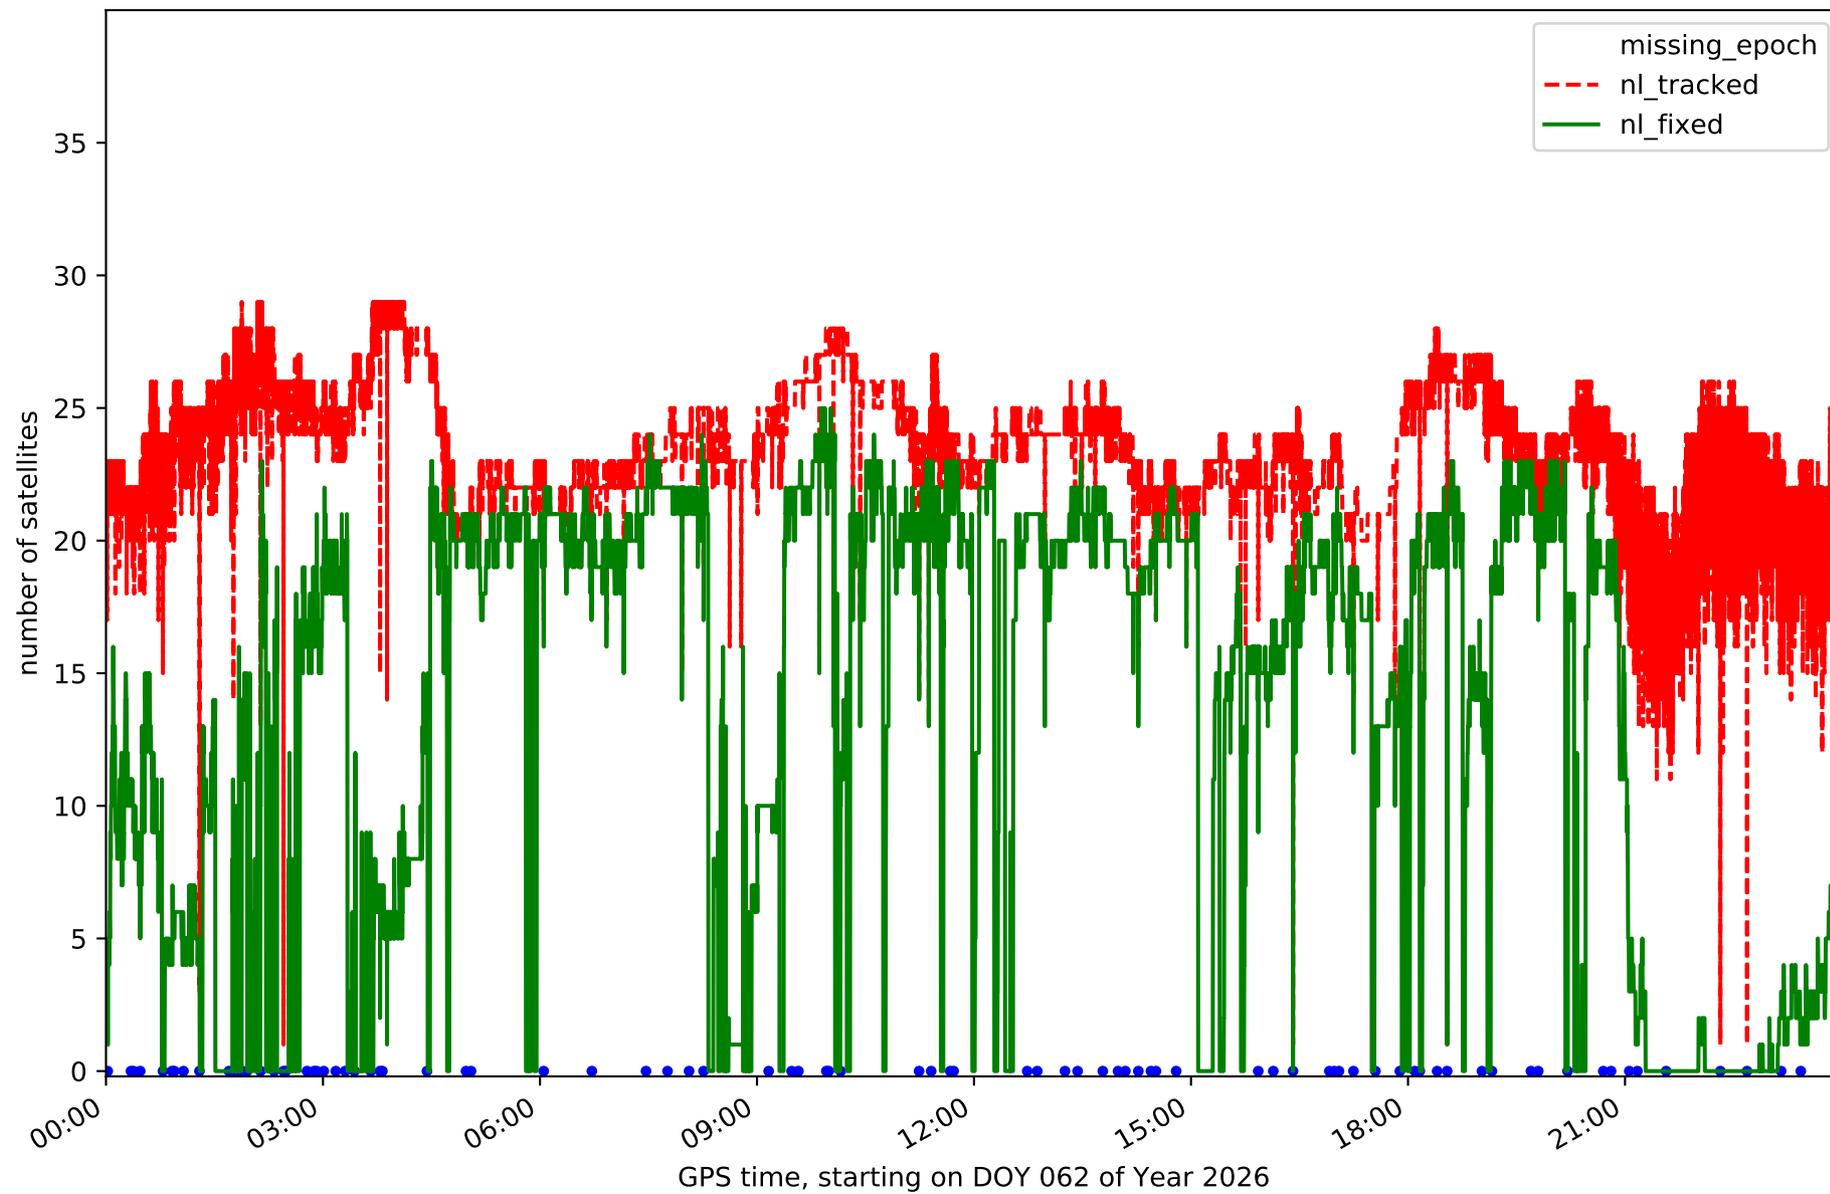
Station ULP2 in network N31T
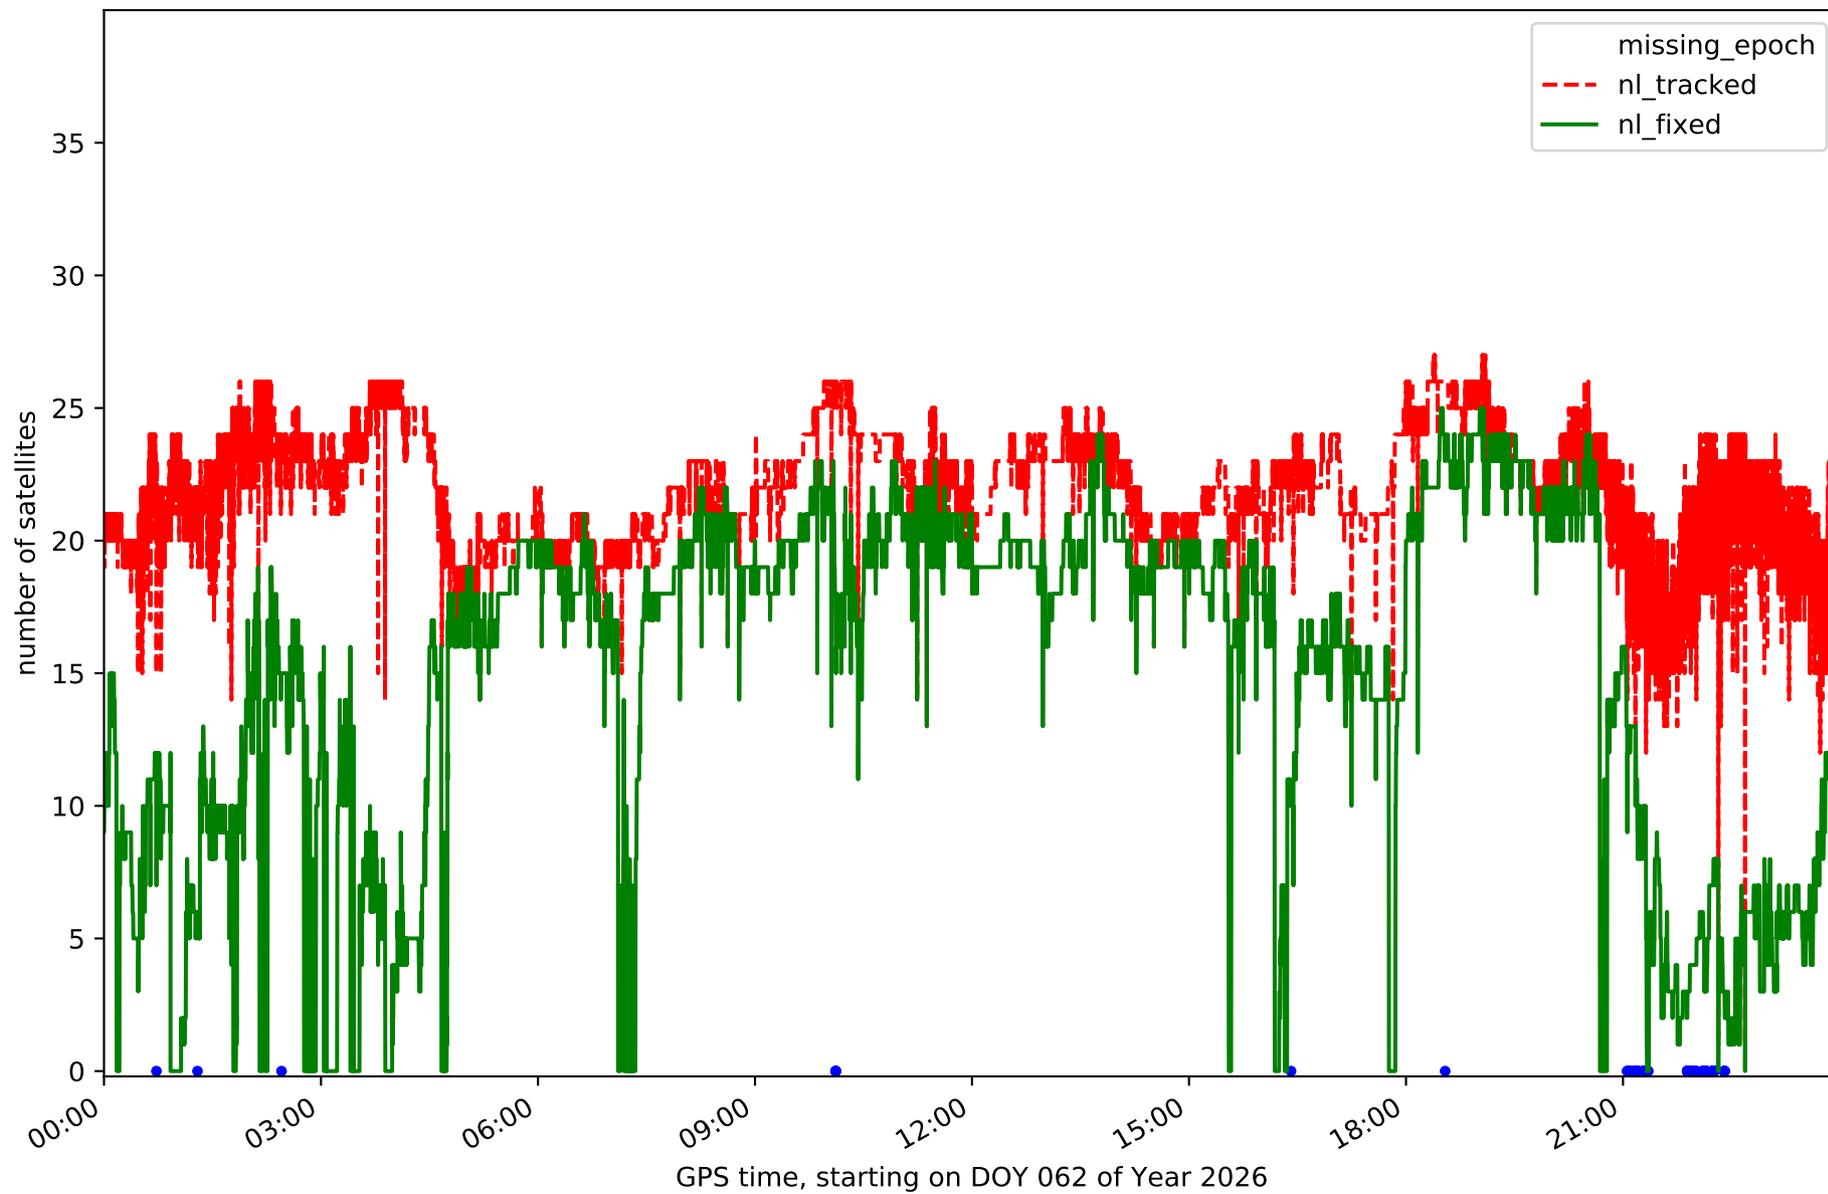
RefCheck for station FUER in network N31T

mean: N=-0.0 E=-0.006 U=-0.015

std: N=0.008 E=0.009 U=0.014 2D=0.006 3D=0.011

GPS time, starting on DOY 062 of Year 2026
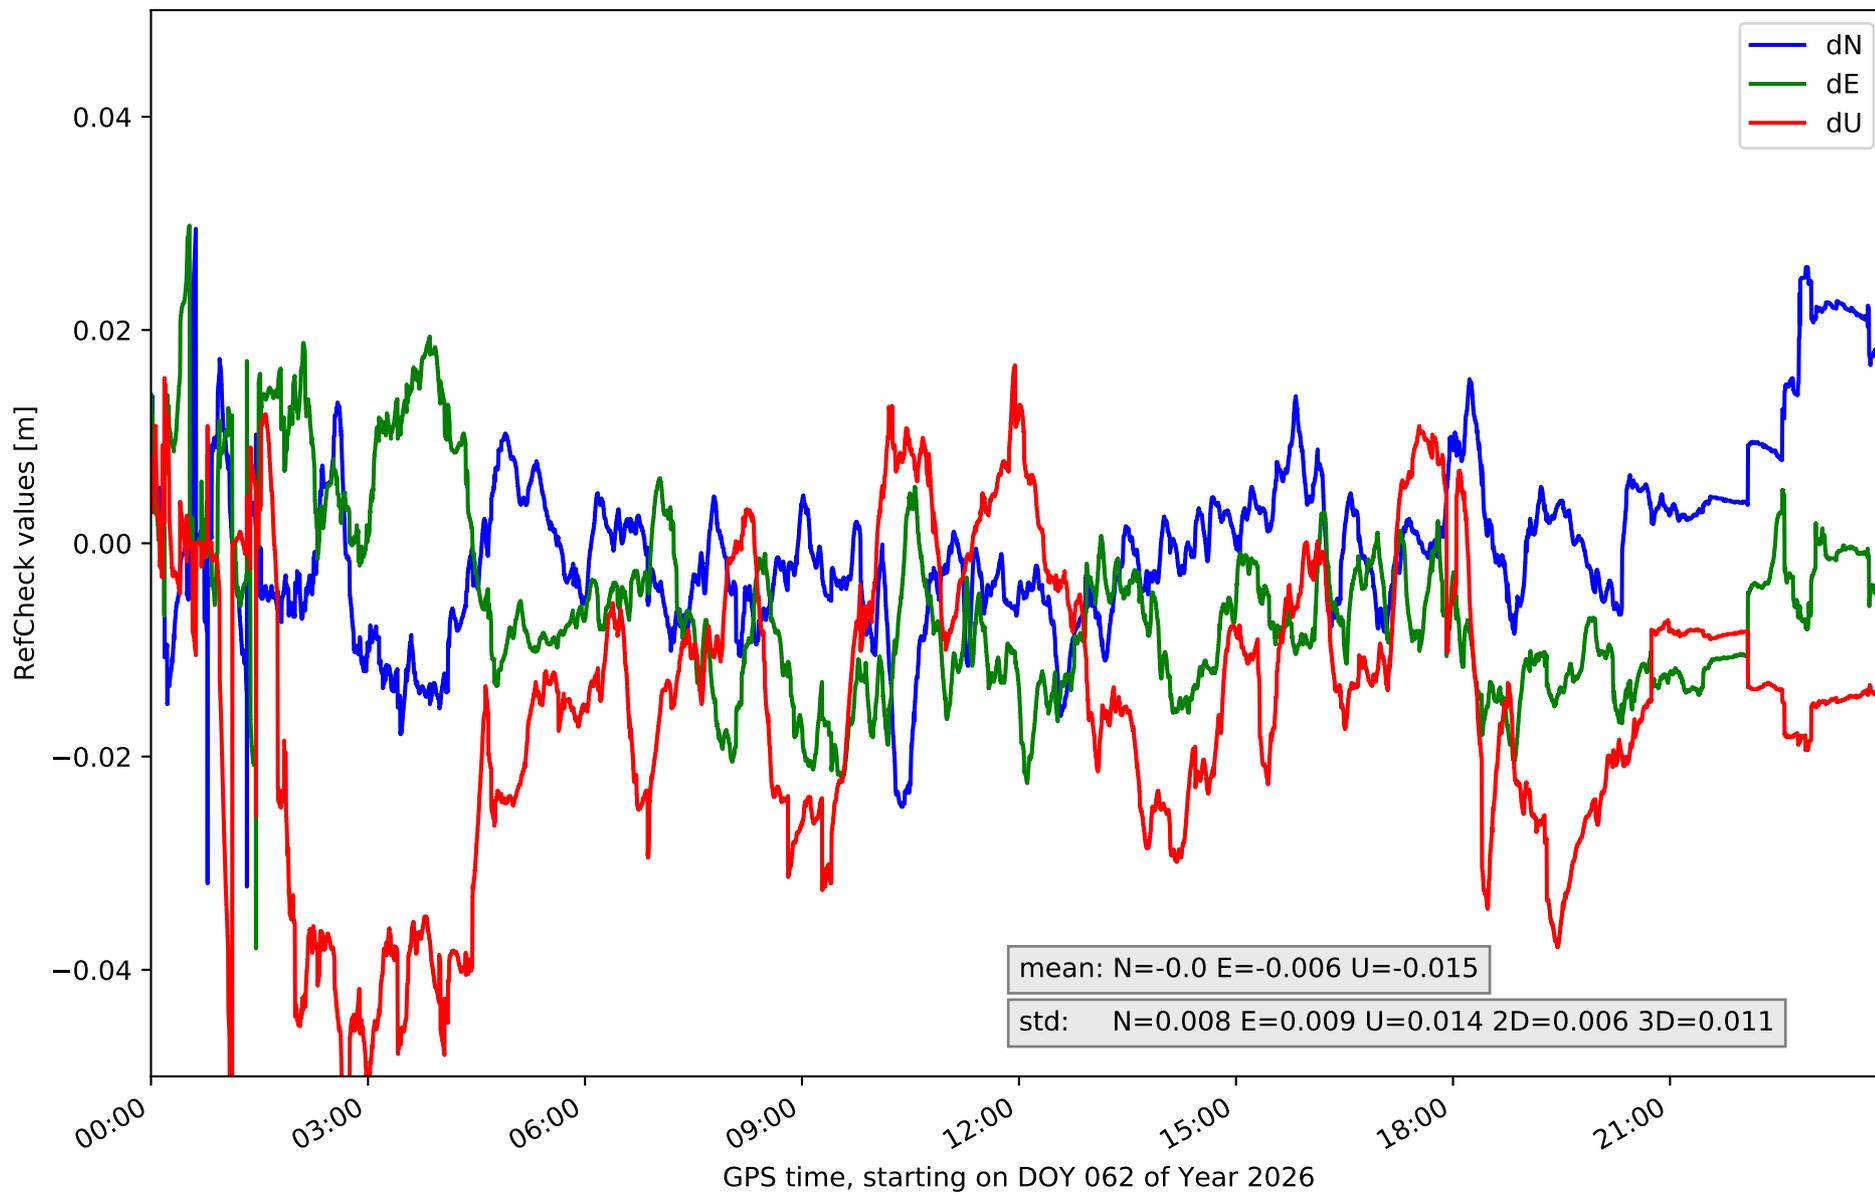
RefCheck for station LALA in network N31T
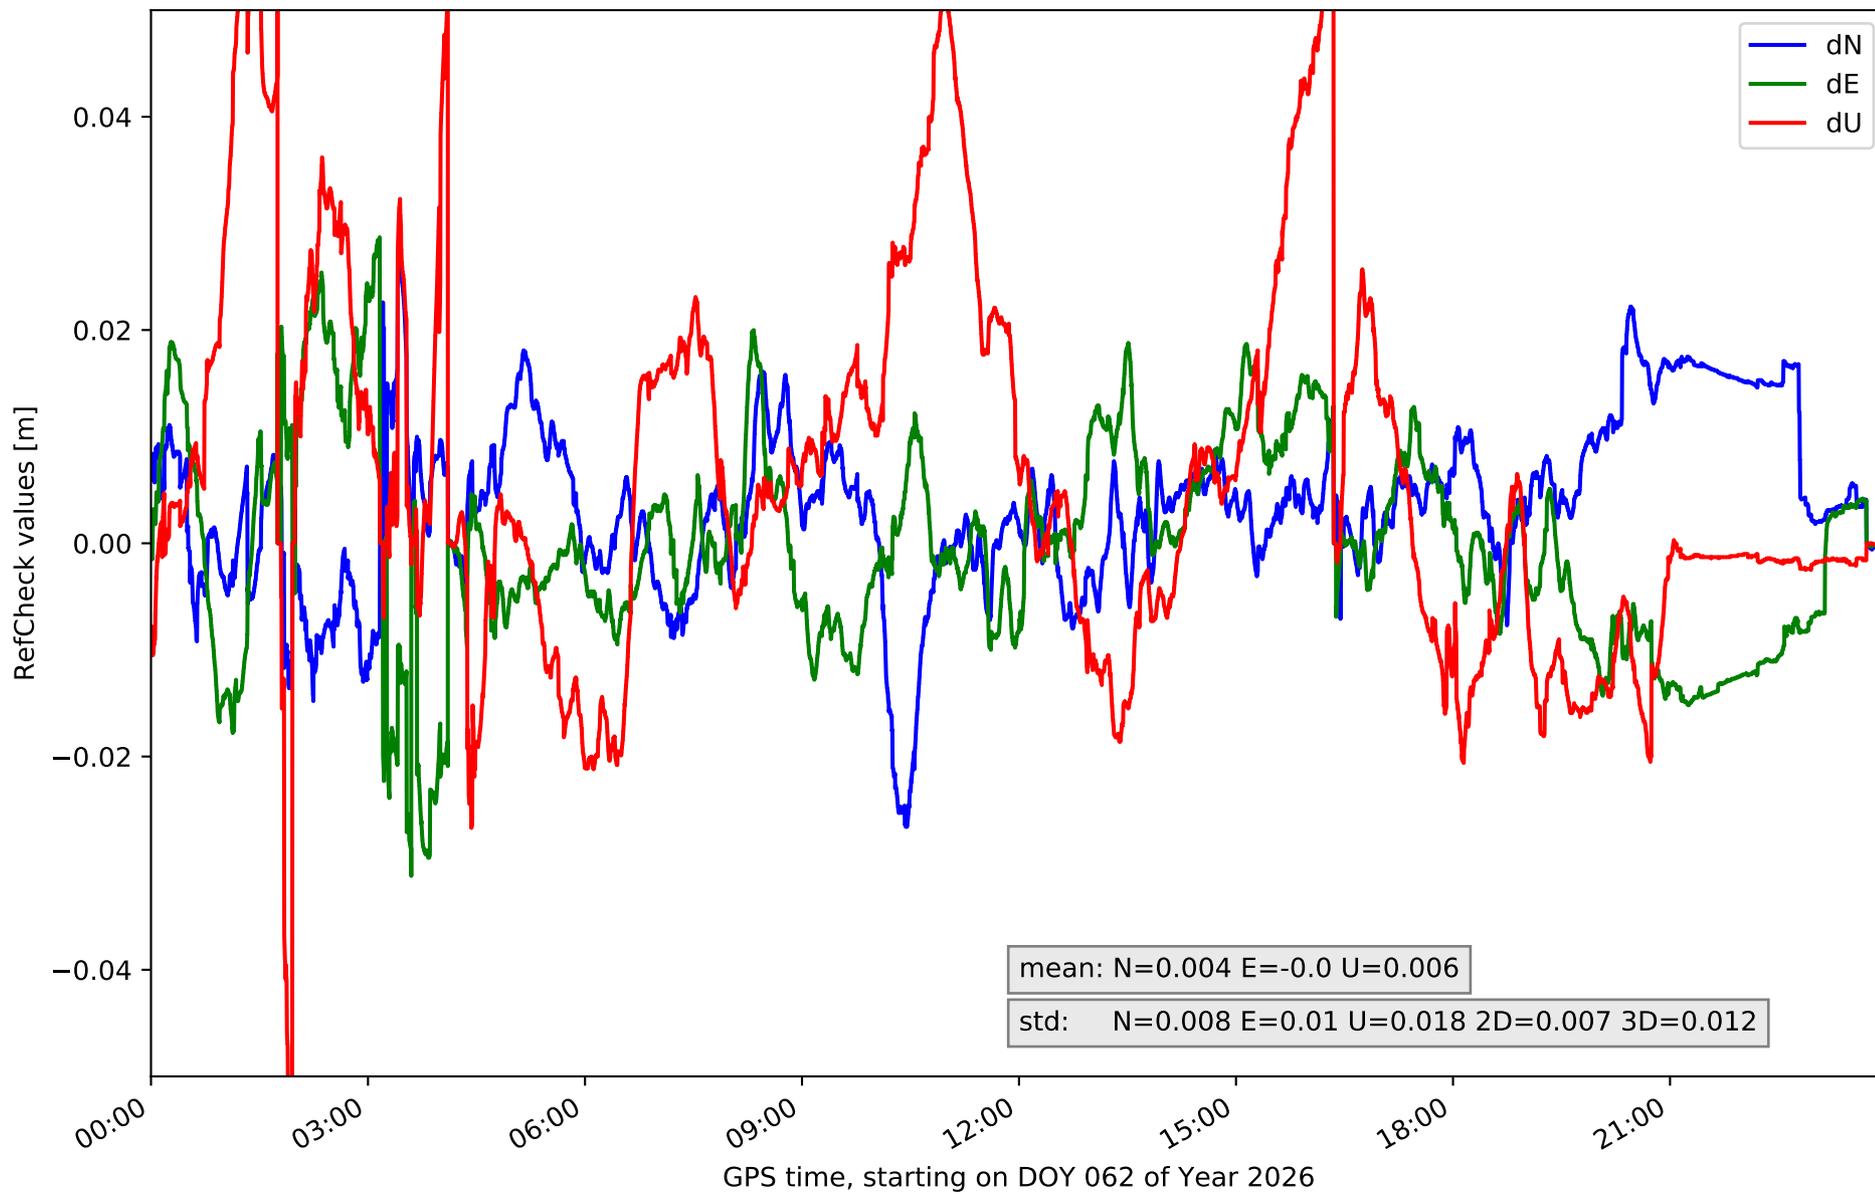
RefCheck for station LZ01 in network N31T
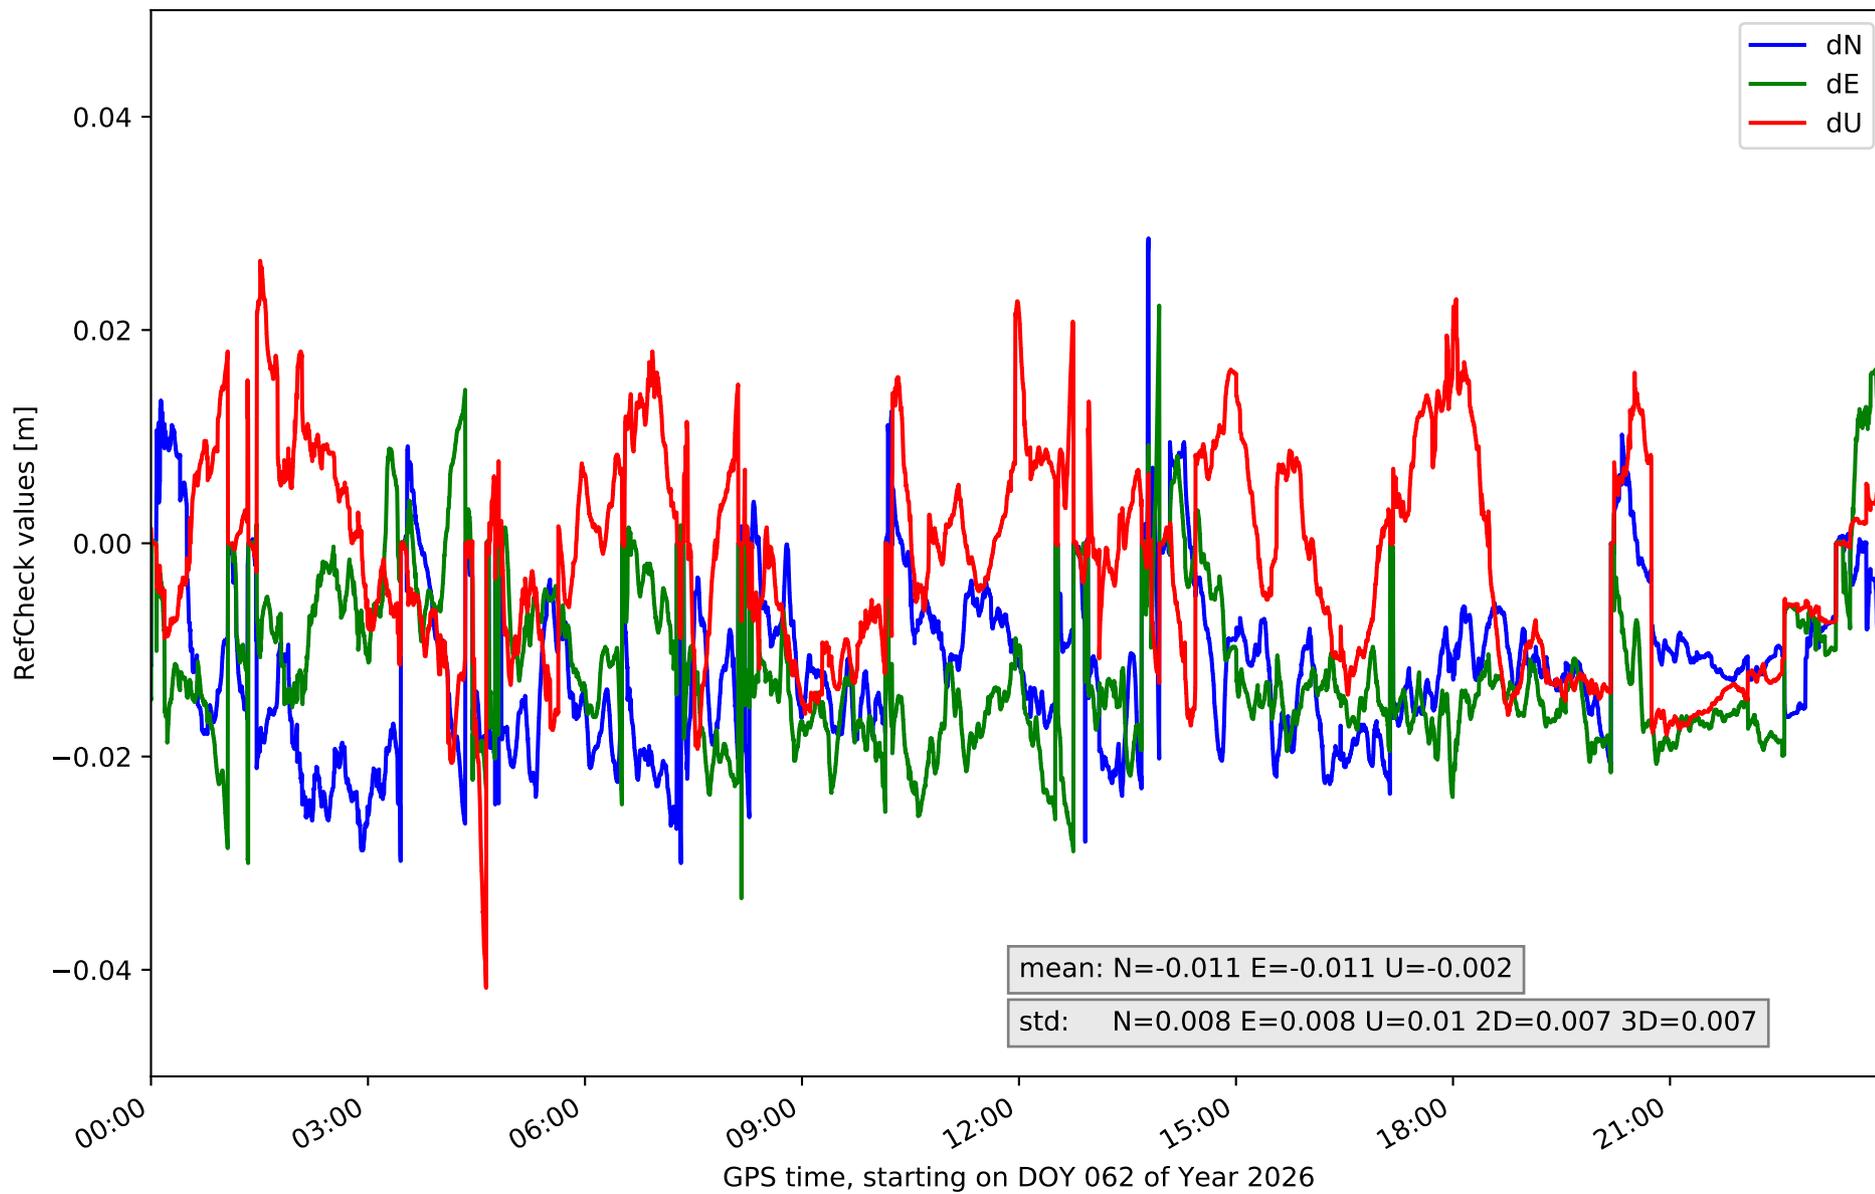
RefCheck for station LZ02 in network N31T

mean: N=-0.005 E=-0.011 U=-0.008

std: N=0.008 E=0.008 U=0.014 2D=0.006 3D=0.009

RefCheck for station LZ03 in network N31T

mean: N=-0.003 E=-0.015 U=0.004

std: N=0.006 E=0.009 U=0.009 2D=0.006 3D=0.007

GPS time, starting on DOY 062 of Year 2026
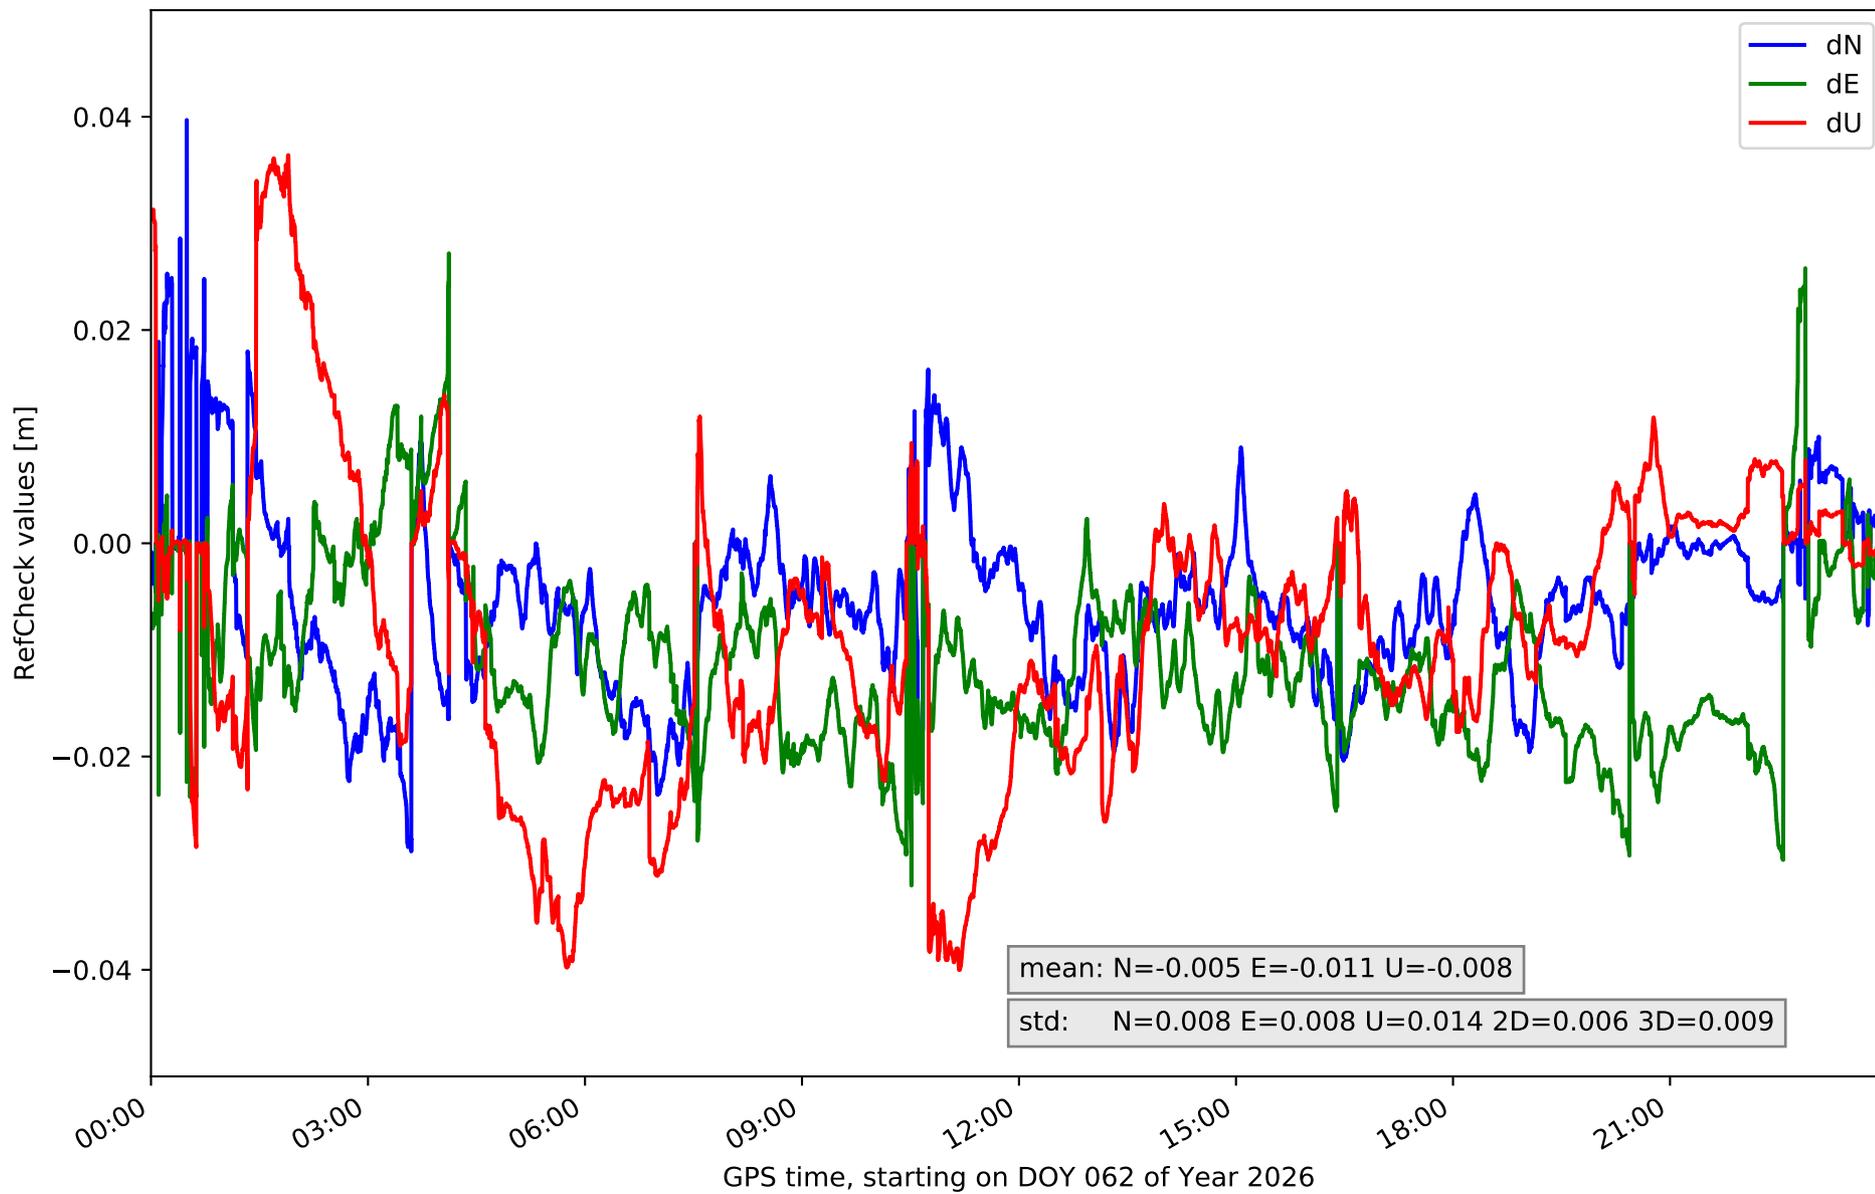
RefCheck for station MASP in network N31T

mean: N=0.005 E=0.01 U=0.007

std: N=0.009 E=0.01 U=0.022 2D=0.008 3D=0.015

GPS time, starting on DOY 062 of Year 2026
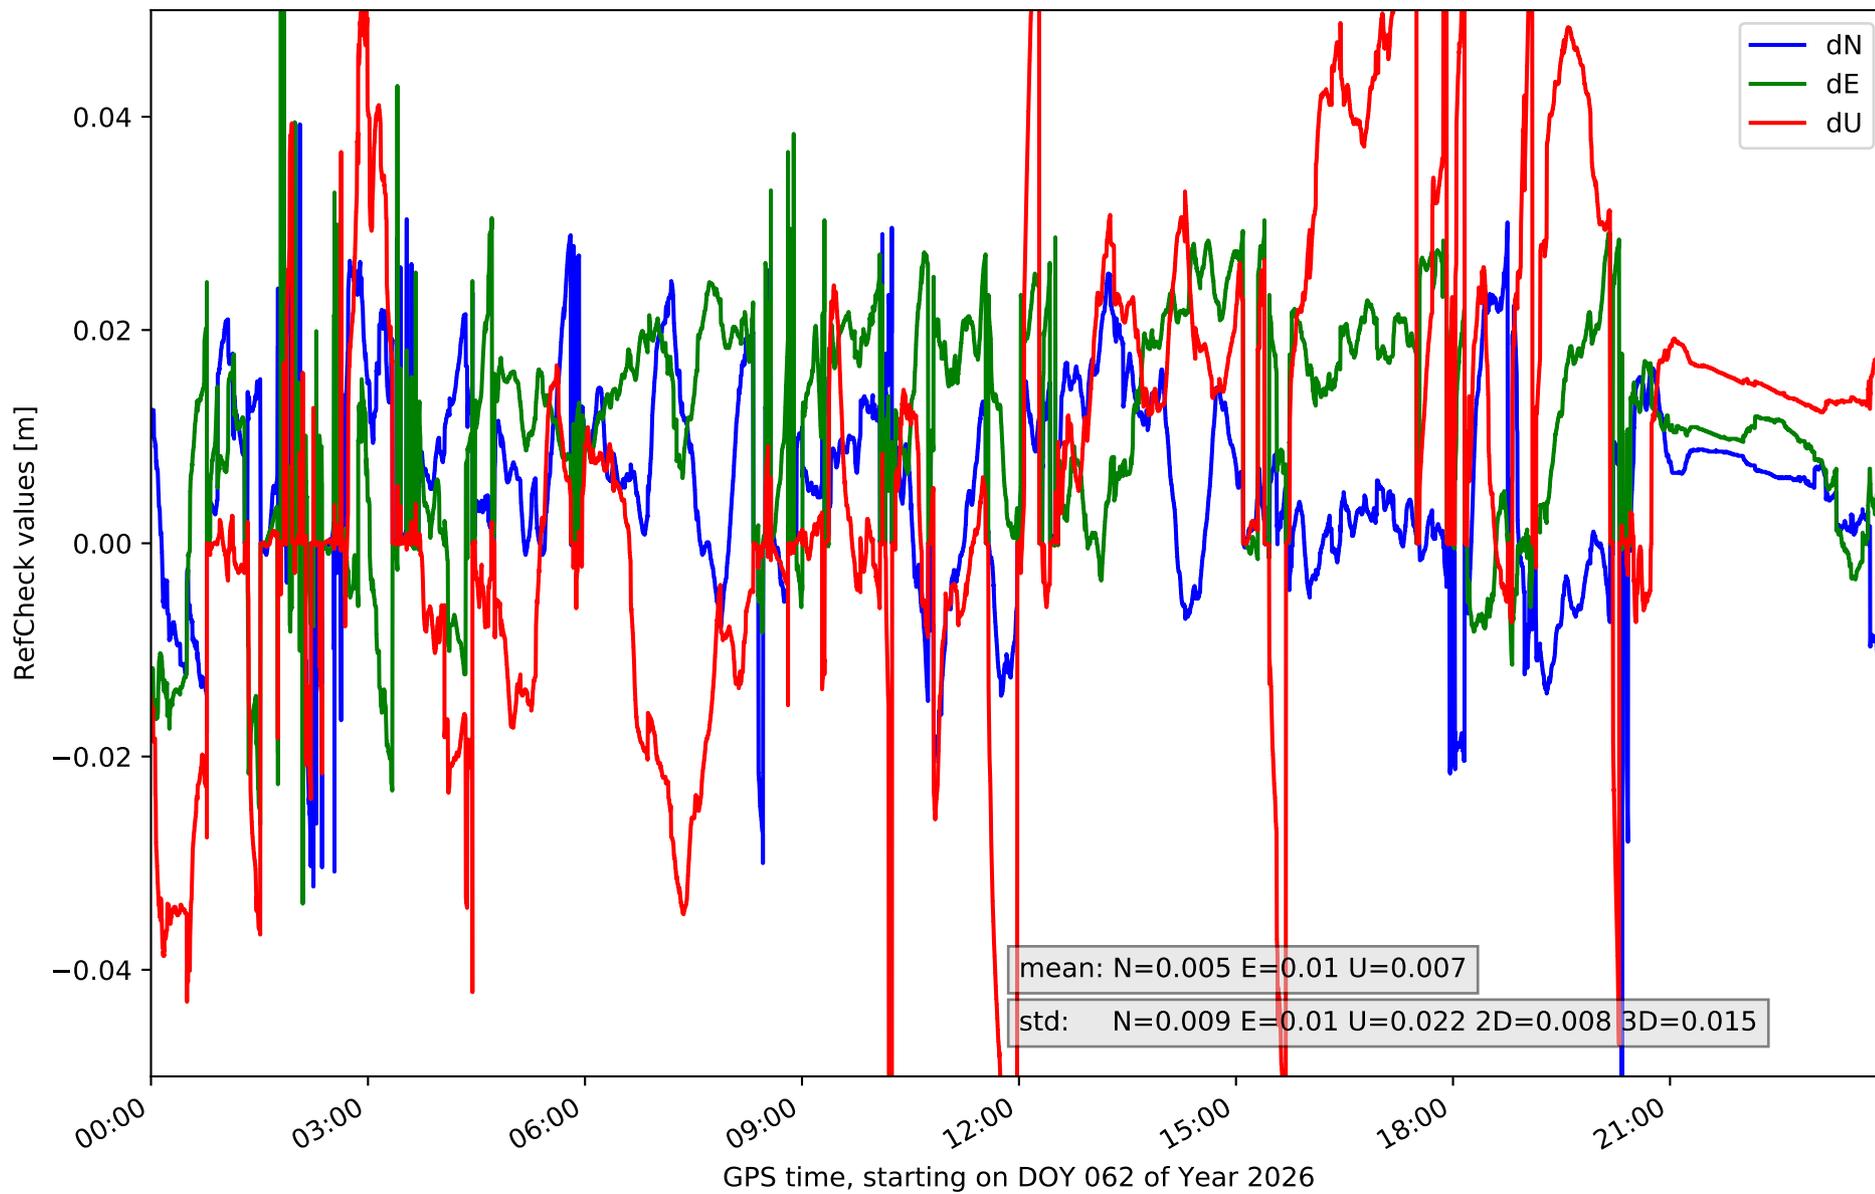
RefCheck for station ULP2 in network N31T

mean: N=0.003 E=0.009 U=-0.016

std: N=0.008 E=0.01 U=0.017 2D=0.007 3D=0.013
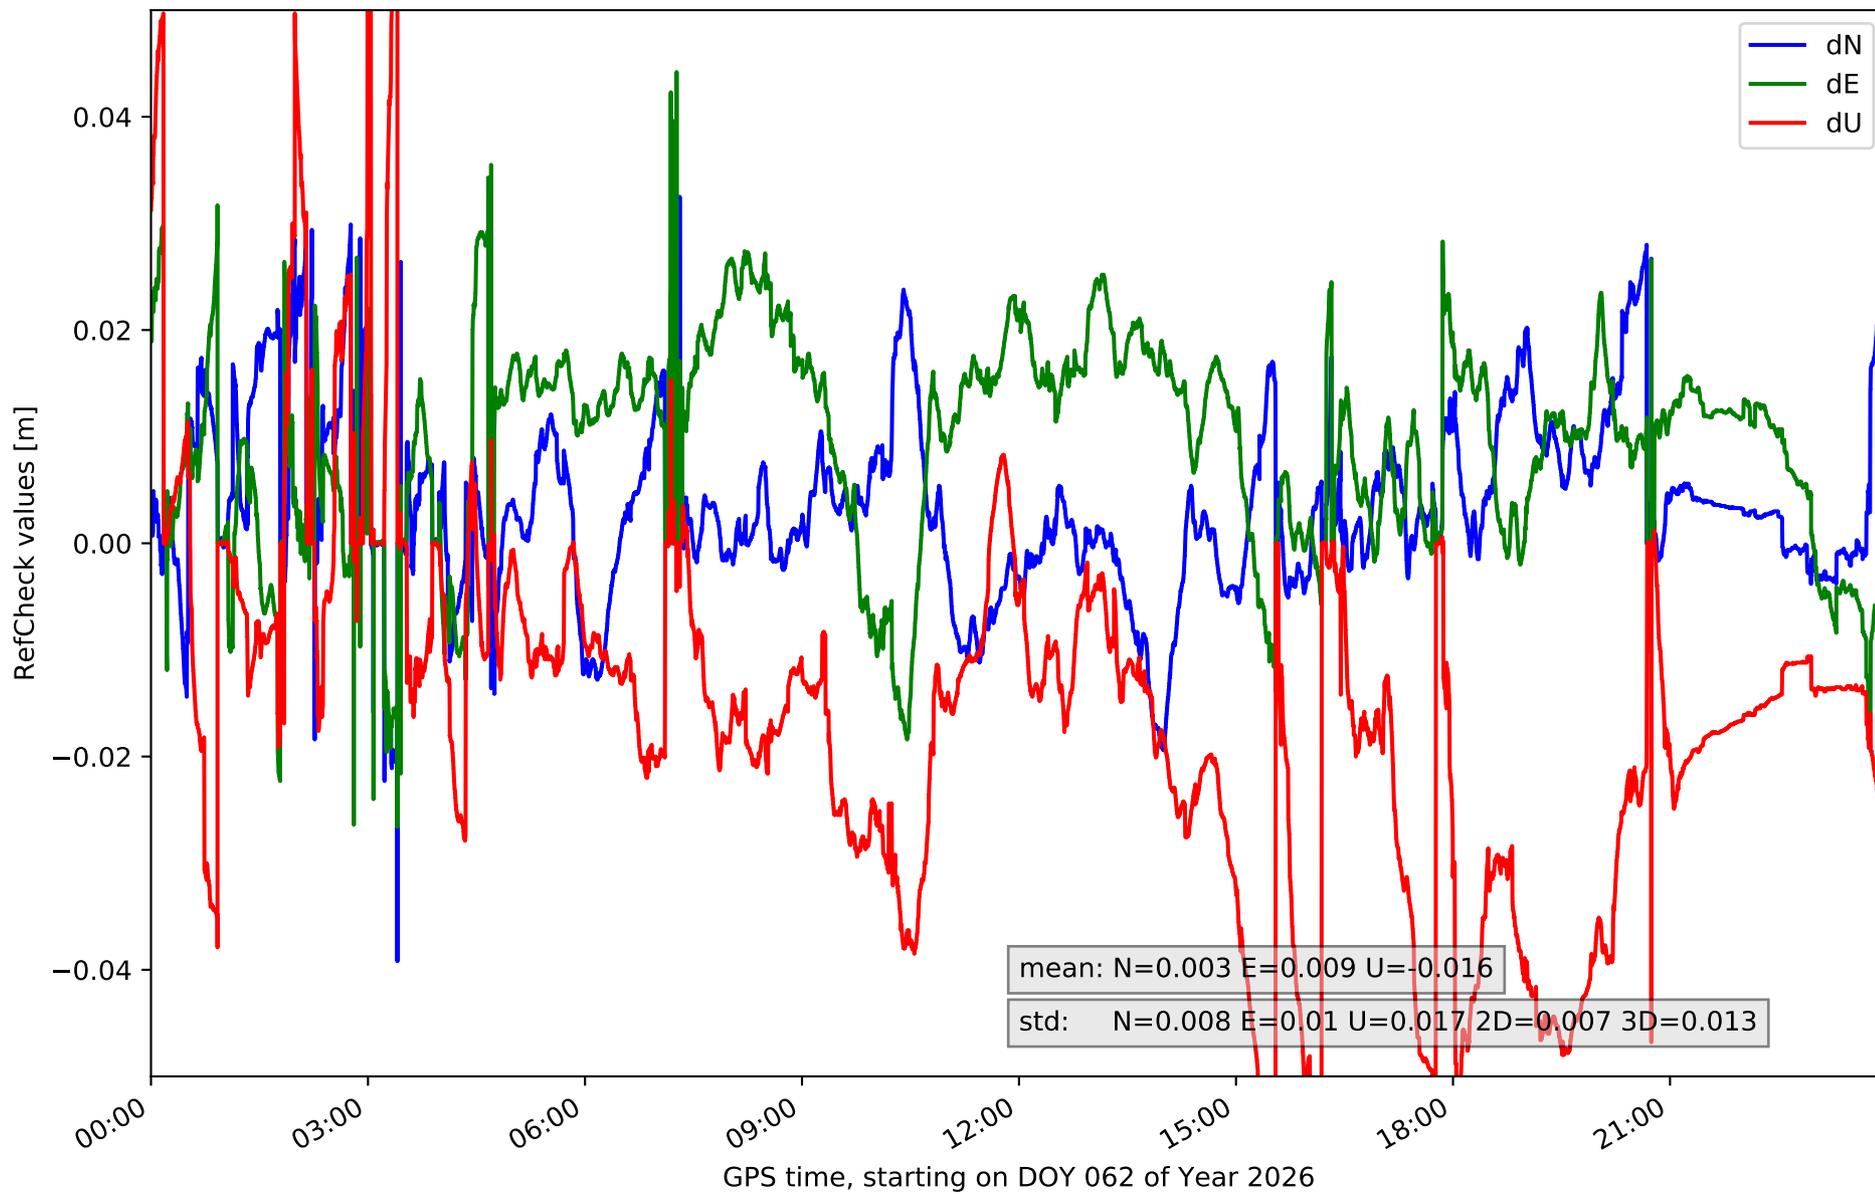
RefCheck values for network N31T

Station	Nmin	Nmax	Nstd	Emin	Emax	Estd	Umin	Umax	Ustd	std2D	std3D	#2D > 0.01	% 2D > 0.01	#3D > 0.02	% 3D > 0.02
FUER	-0.032	0.029	0.008	**-0.038**	0.03	0.009	-0.06	0.017	0.014	0.006	0.011	53869	64.2	39222	46.8
LALA	-0.027	0.028	0.008	-0.031	0.029	**0.01**	-0.061	**0.066**	0.018	0.007	0.012	38452	45.8	32012	38.2
LZ01	-0.03	0.029	0.008	-0.033	0.022	0.008	-0.042	0.026	0.01	0.007	0.007	72752	86.7	51610	61.5
LZ02	-0.029	**0.04**	0.008	-0.032	0.027	0.008	-0.04	0.036	0.014	0.006	0.009	68647	81.8	47132	56.2
LZ03	-0.029	0.017	0.006	-0.032	0.018	0.009	-0.021	0.042	0.009	0.006	0.007	**76233**	**90.9**	50053	59.7
MASP	**-0.063**	0.039	**0.009**	-0.034	**0.055**	**0.01**	-0.06	0.061	**0.022**	**0.008**	**0.015**	66989	79.8	53281	63.5
ULP2	-0.039	0.033	0.008	-0.027	0.044	**0.01**	**-0.062**	**0.066**	0.017	0.007	0.013	61991	73.9	**55074**	**65.6**
Mean	**-0.036**	**0.031**	**0.008**	**-0.032**	**0.032**	**0.009**	**-0.049**	**0.045**	**0.015**	**0.007**	**0.011**	**62704.7**	**74.7**	**46912.0**	**55.9**
Min/Max	**-0.063**	**0.04**	**0.009**	**-0.038**	**0.055**	**0.01**	**-0.062**	**0.066**	**0.022**	**0.008**	**0.015**	**76233**	**90.9**	**55074**	**65.6**

fixing statistic for network N31T

fixing percentage of	all GNSS	G	R	E	C
using threshold 0.3	76.6	81.9	67.9	78.9	74.7
considering satellites with dual-frequency fixed	70.4	73.8	61.9	72.7	71.1
considering all signals separately	70.7	73.5	61.9	73.2	68.6